

FEATURES



- High dense cell design for extremely low $R_{DS(ON)}$
- Rugged and reliable
- Case Material: Molded Plastic.

Absolute Maximum Ratings (TA=25°C, unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V _{DS}	-12	V
Gate-source Voltage	V _{GS}	± 8	V
Drain Current (Continuous)	I _D	-4.1	A
Drain Current (Pulsed) ^a	I _{DM}	-10	A
Total Power Dissipation @TA=25°C	P _D	0.35	W
Operating Junction and Storage Temperature Range	T _J , T _{stg}	-55 to +150	°C
Thermal Resistance Junction to Ambient (PCB mounted) ^b	R _{JA}	357	°C/W

SI2305

P-Channel MOSFET

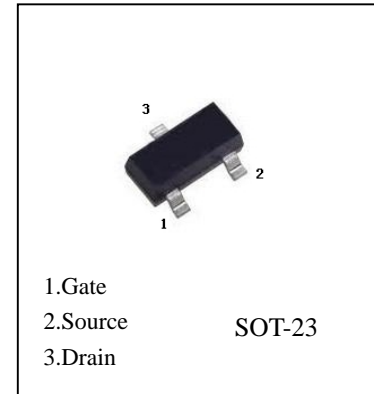

Electrical Characteristics (TA=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Static						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-12			V
Gate-source threshold voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-0.5		-0.9	
Gate-source leakage	I _{GSS}	V _{DS} = 0V, V _{GS} = ±8V			±100	nA
Zero gate voltage drain current	I _{DSS}	V _{DS} = -8V, V _{GS} = 0V			-1	μA
Drain-source on-state resistance ^{d,e}	R _{DS(on)}	V _{GS} = -4.5V, I _D = -3.5A		30	45	mΩ
		V _{GS} = -2.5V, I _D = -3A		40	60	
		V _{GS} = -1.8V, I _D = -2.0A		60	90	
Forward transconductance ^a	g _{fs}	V _{DS} = -5V, I _D = -4.1A	6			S
Dynamic						
Input capacitance ^{b,c}	C _{iss}	V _{DS} = -4V, V _{GS} = 0V, f = 1MHz		740		pF
Output capacitance ^{b,c}	C _{oss}			290		
Reverse transfer capacitance ^{b,c}	C _{rss}			190		
Total gate charge ^b	Q _g	V _{DS} = -4V, V _{GS} = -4.5V, I _D = -4.1A		7.8	15	nC
		V _{DS} = -4V, V _{GS} = -2.5V, I _D = -4.1A		4.5	9	
Gate-source charge ^b	Q _{gs}			1.2		
Gate-drain charge ^b	Q _{gd}		1.6			
Gate resistance ^{b,c}	R _g	f = 1MHz	1.4	7	14	Ω

SI2305







Electrical Characteristics (TA=25°C, unless otherwise noted)

Turn-on delay time ^{b,c}	t _{d(on)}	V _{DD} =-4V, R _L =1.2Ω, I _D ≈-3.3A, V _{GEN} =-4.5V, R _g =1Ω		13	20	ns
Rise time ^{b,c}	t _r			35	53	
Turn-off Delay time ^{b,c}	t _{d(off)}			32	48	
Fall time ^{b,c}	t _f			10	20	
Turn-on delay time ^{b,c}	t _{d(on)}	V _{DD} =-4V, R _L =1.2Ω, I _D ≈-3.3A, V _{GEN} =-8V, R _g =1Ω		5	10	
Rise time ^{b,c}	t _r			11	17	
Turn-off delay time ^{b,c}	t _{d(off)}			22	33	
Fall time ^{b,c}	t _f			16	24	
Drain-source body diode characteristics						
Continuous source-drain diode current	I _S	T _C =25°C			-1.4	A
Pulse diode forward current ^a	I _{SM}				-10	
Body ciode voltage	V _{SD}	I _F =-3.3A			-1.2	V

Note :

- Pulse Test ; Pulse Width ≤300μs, Duty Cycle ≤2%.
- Guaranteed by design, not subject to production testing.
- These parameters have no way to verify.

SI2305 Typical Characteristics

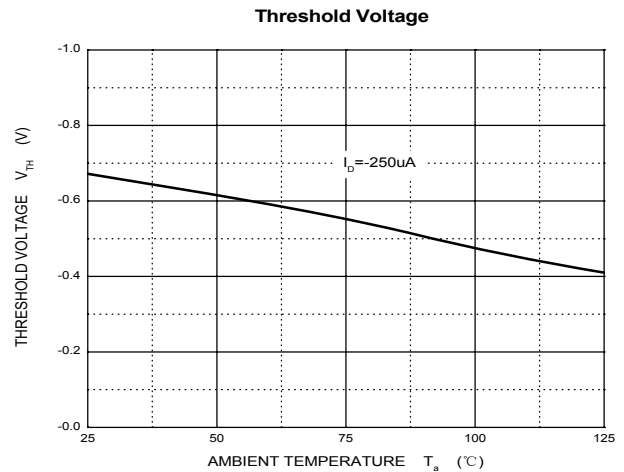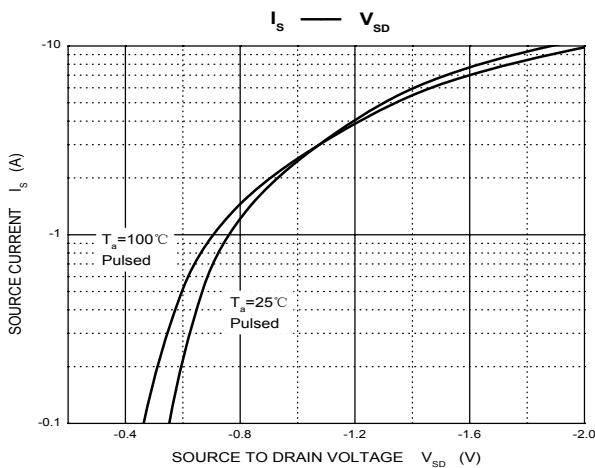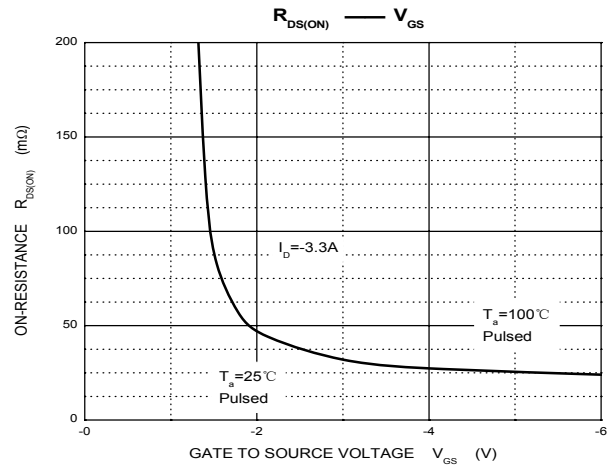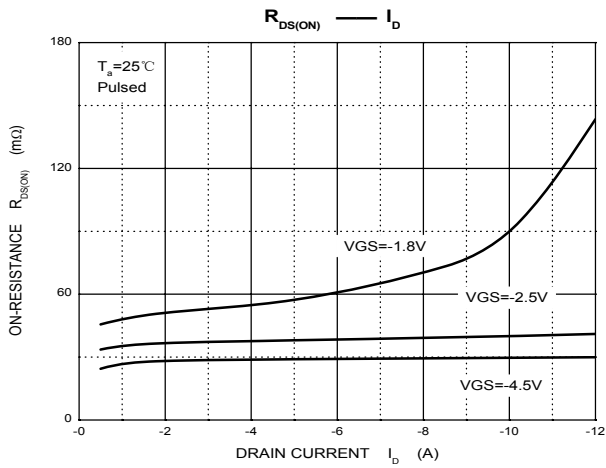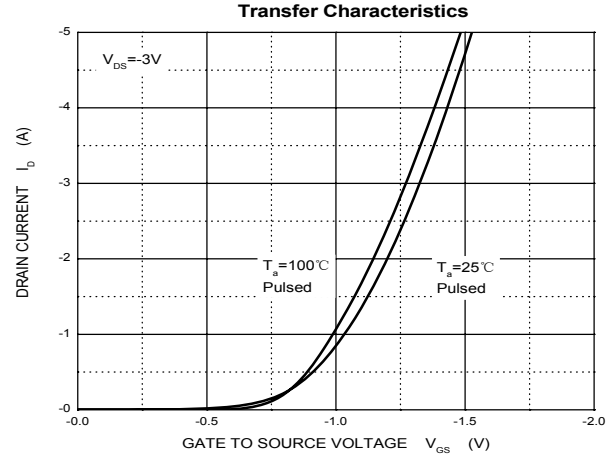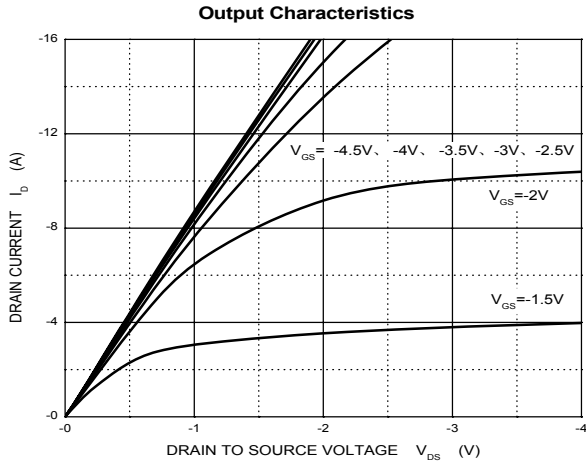

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Hottech](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [FDPF9N50NZ](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#) [PSMN4R2-30MLD](#)
[TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#)
[NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#)
[IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#)
[BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IPS60R1K0PFD7SAKMA1](#) [IPS60R360PFD7SAKMA1](#)
[IPS60R600PFD7SAKMA1](#) [IPS60R210PFD7SAKMA1](#) [DMN2990UFB-7B](#)