


■ Description 产品描述:

Al-Ecap, 100uF, 50v, ±20%, Extra low ESR, D6.3H7.7mm, 2000Hrs@105°C, -55~+105°C, SMD.

■ Dimension & Marking 印刷及尺寸:

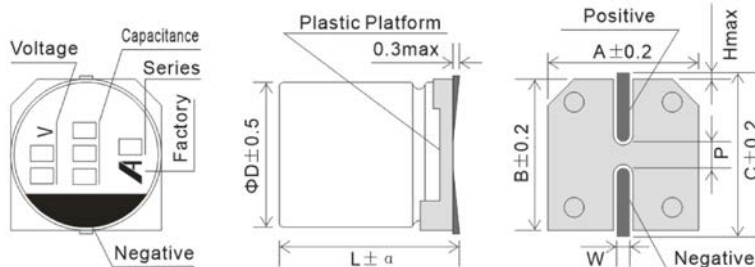


| Items | A | B | C | D | P | L | α | W | H |
|------------------|-----|-----|-----|-----|-----|-----|------|---------|---------|
| Case φ6.3x7.7 | 6.6 | 6.6 | 7.3 | 6.3 | 2.0 | 7.7 | ±0.3 | 0.5~0.8 | 0.5max. |

■ Features 特长/用途:

- 105°C, Long life 宽温长寿命
- Extra low impedance capacitors 极低阻抗
- Designed for surface mounting on high density PC board 适合高密度表面安装

■ Serie Expansion 系列拓展



| Items 项目 | Performance 性能 | | | | |
|---|---|---|------|---|------|
| Rated Voltage 额定电压(V _R) | 50 V | | | | |
| Capacitance 额定容量(C _R) | 100 uF (120Hz, 20°C) | | | | |
| Category Temperature Range 类别温度范围 | -55°C ~ +105°C | | | | |
| Capacitance Tolerance 容量误差 | -20% ~ +20% (120Hz, 20°C) | | | | |
| Surge Voltage 浪涌电压(V _S) | 57.5 V _{DC} | | | | |
| Leakage Current 泄漏电流(I _{LC}) | I _{LC} ≤ 50 uA After 2 minutes | | | | |
| Dissipation Factor (Tanδ) 损失角正切值 | ≤ 0.10 (120Hz, 20°C) | | | | |
| Impedance 阻抗 (Z, Ω) | ≤ 0.68 (100kHz, 20°C) | | | | |
| Ripple Current 纹波电流(I _{RC, rms}) | 185 mA (100kHz, 105°C) | | | | |
| Low Temperature Characteristics 温度特性(120Hz) | Impedance ratio 阻抗比(Max.) | Z _(-25°C) / Z _(+20°C) | 2 | | |
| | | Z _(-55°C) / Z _(+20°C) | 3 | | |
| Endurance and Shelf Life 耐久性 & 高温无负荷特性 | Items 项目 | Endurance 耐久性 | | Shelf Life Test 高温无负荷 | |
| | Test Time 测试时长 | 2,000 Hrs at 105°C; V _R | | 1,000 Hrs at 105°C | |
| | Cap. Change 容量变化率 | Within ±20% of initial Value ≤ 初始值的 ±20% | | Within ±20% of initial Value ≤ 初始值的 ±20% | |
| | Tanδ 损失角正切值 | Less than 200% of specified Value ≤ 初始规格值的 ±200% | | Less than 200% of specified Value ≤ 初始规格值的 ±200% | |
| | Leakage Current 漏电流 | Whitin specified Value ≤ 初始规格值 | | Whitin specified Value ≤ 初始规格值 | |
| Ripple Current and Frequency Multipliers 纹波电流频率系数 | Frequency (Hz) | 120 | 1k | 10k | 100k |
| | Multiplier | 0.65 | 0.85 | 0.95 | 1.00 |
| Standards 参考标准 | JIS C 5101-1, -18, IEC 60384-4 | | | | |
| Remarks 附注 | RoHS Compliance, Halogen-free | | | | |

* Please refer to "Precautions and Guidelines for Aluminum Electrolytic Capacitors" section in catalog for further details 详细信息请参阅目录中的“铝电解电容器注意事项和指南”

Publication Date

发行日期

2022-02-15

Approved

批准

Checked

复核

Designed

设计

Revision Date

修订日期

Lei Yang

Chao Yu

Version No.

1.0

Dimension and Permissible Ripple Current 尺寸及纹波电流速查表:

| uF \ WV | 6.3v(0J) | | | 10v(1A) | | | 16v(1C) | | | 25v(1E) | | | 35v(1V) | | | 50v(1H) | | |
|---------|------------|------|------|------------|------|------|------------|------|------|------------|------|------|------------|------|------|------------|------|------|
| | ϕ DxL | Imp. | R.C. | ϕ DxL | Imp. | R.C. | ϕ DxL | Imp. | R.C. | ϕ DxL | Imp. | R.C. | ϕ DxL | Imp. | R.C. | ϕ DxL | Imp. | R.C. |
| 1 | | | | | | | | | | | | | | | | 4x5.7 | 2.9 | 60 |
| 1.5 | | | | | | | | | | | | | | | | 4x5.7 | 2.9 | 60 |
| 2.2 | | | | | | | | | | | | | | | | 4x5.7 | 2.9 | 60 |
| 3.3 | | | | | | | | | | | | | 4x5.7 | 1.8 | 80 | 4x5.7 | 2.9 | 60 |
| 4.7 | | | | | | | | | | | | | 4x5.7 | 1.8 | 80 | 5x5.7 | 1.52 | 85 |
| 10 | | | | | | | | | | 4x5.7 | 1.8 | 80 | 4x5.7 | 1.8 | 80 | 5x5.7 | 1.52 | 85 |
| 15 | | | | | | | 4x5.7 | 1.8 | 80 | 4x5.7 | 1.8 | 80 | 5x5.7 | 0.76 | 150 | 6.3x5.7 | 0.88 | 165 |
| 22 | | | | 4x5.7 | 1.8 | 80 | 4x5.7 | 1.8 | 80 | 5x5.7 | 0.76 | 150 | 5x5.7 | 0.76 | 150 | 6.3x5.7 | 0.88 | 165 |
| 33 | | | | 4x5.7 | 1.8 | 80 | 4x5.7 | 1.8 | 80 | 5x5.7 | 0.76 | 150 | 5x5.7 | 0.76 | 150 | 6.3x5.7 | 0.88 | 165 |
| 47 | 4x5.7 | 1.8 | 80 | 4x5.7 | 1.8 | 80 | 5x5.7 | 0.76 | 150 | 5x5.7 | 0.76 | 150 | 6.3x5.7 | 0.44 | 230 | 6.3x7.7 | 0.68 | 185 |
| 56 | 5x5.7 | 0.76 | 150 | 4x5.7 | 1.8 | 80 | 5x5.7 | 0.76 | 150 | 6.3x5.7 | 0.44 | 230 | 6.3x5.7 | 0.44 | 230 | 6.3x7.7 | 0.68 | 185 |
| 68 | 5x5.7 | 0.76 | 150 | 5x5.7 | 0.76 | 150 | 5x5.7 | 0.76 | 150 | 6.3x5.7 | 0.44 | 230 | 6.3x5.7 | 0.44 | 230 | 6.3x7.7 | 0.68 | 185 |
| 100 | 5x5.7 | 0.76 | 150 | 5x5.7 | 0.76 | 150 | 6.3x5.7 | 0.44 | 230 | 6.3x7.7 | 0.34 | 280 | 6.3x5.7 | 0.44 | 230 | 6.3x7.7 | 0.34 | 280 |
| 150 | 5x5.7 | 0.76 | 150 | 6.3x5.7 | 0.44 | 230 | 6.3x5.7 | 0.44 | 230 | 6.3x7.7 | 0.34 | 280 | 6.3x7.7 | 0.34 | 280 | 8x10.5 | 0.18 | 670 |
| 220 | 6.3x5.7 | 0.44 | 230 | 6.3x5.7 | 0.44 | 230 | 6.3x7.7 | 0.34 | 280 | 8x10.5 | 0.17 | 600 | 8x10.5 | 0.17 | 600 | 10x10.5 | 0.18 | 670 |
| 330 | 6.3x5.7 | 0.44 | 230 | 6.3x7.7 | 0.34 | 280 | 6.3x7.7 | 0.34 | 280 | 8x10.5 | 0.17 | 600 | 10x10.5 | 0.09 | 820 | 10x10.5 | 0.18 | 670 |
| 470 | 6.3x7.7 | 0.34 | 280 | 6.3x7.7 | 0.34 | 280 | 8x10.5 | 0.17 | 600 | 10x10.5 | 0.09 | 820 | 10x10.5 | 0.09 | 820 | 10x12.5 | 0.16 | 720 |
| 680 | 8x10.5 | 0.17 | 600 | 8x10.5 | 0.17 | 600 | 8x10.5 | 0.17 | 600 | 10x10.5 | 0.09 | 820 | | | | | | |
| 1000 | 8x10.5 | 0.17 | 600 | 8x10.5 | 0.17 | 600 | 10x10.5 | 0.09 | 820 | | | | | | | | | |
| 1500 | 8x10.5 | 0.17 | 600 | 10x10.5 | 0.09 | 820 | | | | | | | | | | | | |

| uF \ WV | 63v(1J) | | | 80v(1K) | | | 100v(2A) | | |
|---------|------------|------|------|------------|------|------|------------|------|------|
| | ϕ DxL | Imp. | R.C. | ϕ DxL | Imp. | R.C. | ϕ DxL | Imp. | R.C. |
| 4.7 | 5x5.7 | 1.9 | 70 | | | | | | |
| 10 | 5x5.7 | 1.9 | 70 | 6.3x5.7 | 2.4 | 65 | 6.3x7.7 | 1.8 | 75 |
| 22 | 6.3x5.7 | 1.2 | 130 | 6.3x7.7 | 1.8 | 75 | 8x10.5 | 1.3 | 130 |
| 33 | 6.3x7.7 | 0.9 | 150 | 8x10.5 | 1.3 | 130 | 8x10.5 | 1.3 | 130 |
| 47 | 8x10.5 | 0.5 | 280 | 8x10.5 | 1.3 | 130 | 10x10.5 | 0.7 | 200 |
| 56 | 8x10.5 | 0.5 | 280 | 8x10.5 | 1.3 | 130 | 10x10.5 | 0.7 | 200 |
| 68 | 8x10.5 | 0.5 | 280 | 10x10.5 | 0.7 | 200 | 10x10.5 | 0.7 | 200 |
| 82 | 8x10.5 | 0.5 | 280 | 10x10.5 | 0.7 | 200 | | | |
| 100 | 10x10.5 | 0.25 | 450 | 10x10.5 | 0.7 | 200 | | | |
| 150 | 10x10.5 | 0.25 | 450 | | | | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [HRK manufacturer](#):

Other Similar products are found below :

[ULV2H4R7MNL1GS](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [UCX1V471MNQ1MS](#) [10SVP120M](#)
[DV100M050C055ETR](#) [RVJ-50V101MH10U-R](#) [AEH1012471M016R](#) [MAL213967339E3](#) [GVT1C337M0608CNVC](#) [ATB106M050D058](#)
[ATB476M050F065](#) [ATB476M035E058](#) [ATB107M016E058](#) [ATB107M035E077](#) [EMVE350ARA101MF80G](#) [EMHL250ARA221MHA0G](#)
[ATB477M016F102](#) [EMK1EM331FB0D00R](#) [EMF1CM221FB0D00R](#) [EMF1CM331FB0D00R](#) [EMF1CM471FB0D00R](#)
[EMK1JM101GB0D00R](#) [EMK1AM102GB0D00R](#) [EMK1HM221GB0D00R](#) [DV221M6R3E055ETR](#) [DV221M025E077ETR](#)
[RV331M025F105ETR](#) [RVT1A101M0505](#) [GVZ1H101M0607](#) [CK1E100M0405](#) [GVM1E331M0607](#) [VT10UF100V167RV0127](#)
[VT100UF16V167RV0124](#) [CS100UF35V167RV0155](#) [CK220UF16V167RV0142](#) [VT10UF16V167RV0128](#) [VT22UF35V167RV0131](#)
[CS470UF10V167RV0150](#) [CK100UF16V167RV0138](#) [CK220UF10V167RV0141](#) [RVT330UF25V167RV0055](#) [CS47UF16V167RV0152](#)
[VT470UF16V167RV0135](#) [CS100UF10V167RV0144](#) [126RV0017](#) [VT47UF35V167RV0137](#) [CS220UF35V167RV0148](#)