



P.C.B LAYOUT (Copper-side view)

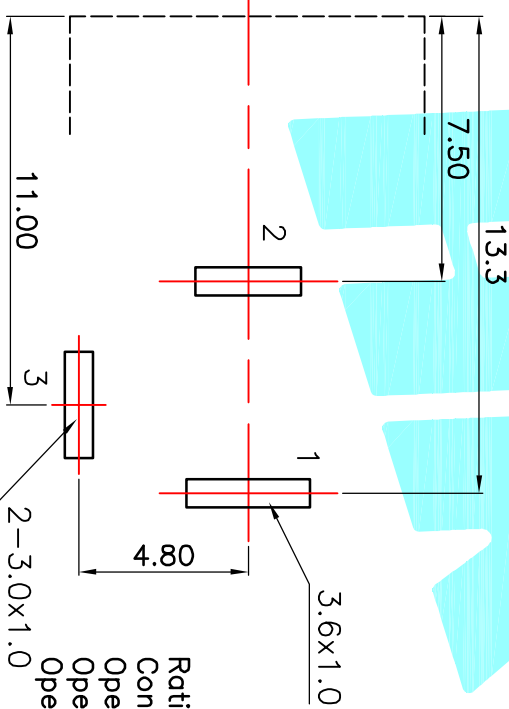

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

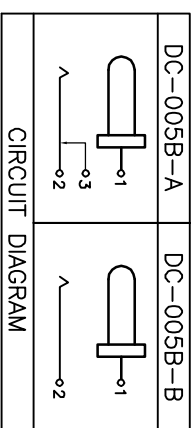

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.																																																																
	A		NEW																																																																			
<table border="1"> <tr> <td>② Terminal</td> <td>3</td> <td>Phosphor bronze</td> <td>Au Plating</td> </tr> <tr> <td>① Housing</td> <td>1</td> <td>Nylon</td> <td>Black</td> </tr> <tr> <td>ITEM</td> <td>PART NAME</td> <td>TERN.O.</td> <td>QTY.</td> <td>MATERIAL</td> <td>FINISHING</td> <td>REMARK</td> </tr> <tr> <td colspan="2">APPROVALS</td> <td>DATE</td> <td colspan="4"></td> </tr> <tr> <td>DRAWN</td> <td>J.X.Zhang</td> <td>2013/11/11</td> <td colspan="4">ELECTRONICS CO.,LTD</td> </tr> <tr> <td>CHECKED</td> <td></td> <td></td> <td colspan="4">TITLE: PHONE JACKES</td> </tr> <tr> <td>APPROVALS</td> <td></td> <td></td> <td colspan="4">PART NO. DC-005B</td> </tr> <tr> <td colspan="2">TOLERANCES ARE</td> <td>30<sup>±0.15</sup></td> <td>±0.30</td> <td>ANGLE</td> <td>UNIT: mm</td> <td>SCALE: 1:1</td> </tr> <tr> <td></td> <td></td> <td>10<sup>±0.10</sup></td> <td>±0.20</td> <td></td> <td></td> <td>PROJ.</td> </tr> <tr> <td></td> <td></td> <td>5<sup>±0.10</sup></td> <td>±0.15</td> <td>±Z</td> <td>DRAWING NO.</td> <td>SHEET 1 OF 1</td> </tr> </table>							② Terminal	3	Phosphor bronze	Au Plating	① Housing	1	Nylon	Black	ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK	APPROVALS		DATE					DRAWN	J.X.Zhang	2013/11/11	ELECTRONICS CO.,LTD				CHECKED			TITLE: PHONE JACKES				APPROVALS			PART NO. DC-005B				TOLERANCES ARE		30 <sup>±0.15</sup>	±0.30	ANGLE	UNIT: mm	SCALE: 1:1			10 <sup>±0.10</sup>	±0.20			PROJ.			5 <sup>±0.10</sup>	±0.15	±Z	DRAWING NO.	SHEET 1 OF 1
② Terminal	3	Phosphor bronze	Au Plating																																																																			
① Housing	1	Nylon	Black																																																																			
ITEM	PART NAME	TERN.O.	QTY.	MATERIAL	FINISHING	REMARK																																																																
APPROVALS		DATE																																																																				
DRAWN	J.X.Zhang	2013/11/11	ELECTRONICS CO.,LTD																																																																			
CHECKED			TITLE: PHONE JACKES																																																																			
APPROVALS			PART NO. DC-005B																																																																			
TOLERANCES ARE		30 <sup>±0.15</sup>	±0.30	ANGLE	UNIT: mm	SCALE: 1:1																																																																
		10 <sup>±0.10</sup>	±0.20			PROJ.																																																																
		5 <sup>±0.10</sup>	±0.15	±Z	DRAWING NO.	SHEET 1 OF 1																																																																

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DC Power Connectors](#) category:*

*Click to view products by [HRO parts](#) manufacturer:*

Other Similar products are found below :

[B04P-VL-VN-1.8](#) [1600206-1](#) [163-0308-EX](#) [163-4012-EX](#) [163-4117-EX](#) [163-7421](#) [163-MJ22-EX](#) [171-0721-EX](#) [KLDX-SMT-0202-BPTR](#)  
[163-0179-EX](#) [163-1000-EX](#) [163-4007-EX](#) [163-4015-EX](#) [171-0722-E](#) [171-7391](#) [K596](#) [KLD-0201-BC](#) [KPPX-D](#) [4C6831AX](#) [TS3PNJ](#)  
[E16550-0008](#) [VLP-08V-1](#) [VLP-12V-1](#) [VLS-01V](#) [DC PLUG-P1M-P1MR](#) [09442](#) [AS120-M](#) [09760](#) [CP30240](#) [TAMIYA-M](#) [TAMIYA-MT1](#)  
[TAMIYA-MT2](#) [4840.1200](#) [4840.2202](#) [C5080HI-04P-18 + C5080HI-C](#) [JC-138](#) [JC-210](#) [JPO-25 \(FC6814\)](#) [JYO-26 \(FC6811\)](#) [JYO-29](#)  
[\(FC68102\)](#) [KLBPS 3](#) [KLS 10 SCHWARZ](#) [KLS 40 SCHWARZ](#) [KPJXHT-4S](#) [DC-10A FC68148](#) [DC-10B \(FC68149\)](#) [WKLS 2](#) [WKLS 40](#)  
[FA67555](#) [XNES/J 210 SCHWARZ](#) [XNES/J 250 SCHWARZ](#)