

Model No.	DC-083
Schematic	


Model No.	1	2	3
PIN	∅1.65	∅2.0	∅2.5

Rating: 3A 30V DC
 Contact Resistance: 30 mΩ Max.
 Operating temperature: -20℃~70℃
 Operating force: 3~20N
 Operating life: 5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION:	CHANGE.	CHECK.	APPRO.
_____	A	_____	NEW	_____	_____	_____
_____	_____	_____	_____	_____	_____	_____
DRAWN LUCAN			APPROVALS			
DATE 2020.12.07			CHECKED			
TITILE: PHONE JACKES			APPROVALS			
PART NO. DC-083			APPROVALS			
UNIT: mm			APPROVALS			
SCALE: 1:1			APPROVALS			
DRAWING NO.			APPROVALS			
SHEET 1 OF 1			APPROVALS			

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
①	Housing	_____	1	PBT	Black	_____
②	Terminal	_____	1	Brass	Tin Plating	_____

TOLERANCES ARE		±2°	DRAWING NO.	_____	SHEET 1 OF 1
30~45	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
10~30	±0.20		PART NO.	DC-083	
5~10	±0.15		TITILE:	PHONE JACKES	
~5	±0.10		DRAWN	LUCAN	

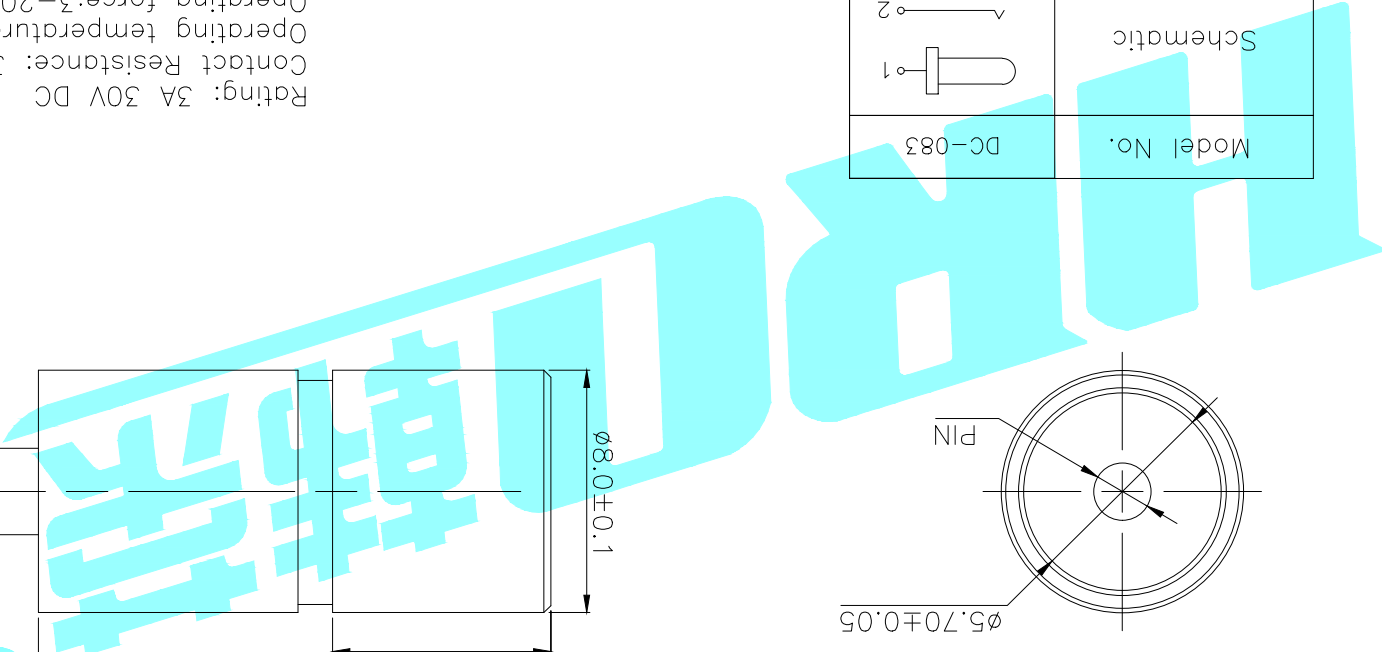

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [hro parts manufacturer](#):

Other Similar products are found below :

[K5-1652UA-01](#) [U-B-M4DD-W-2](#) [K2-1848FP-A4DW-01](#) [3D162](#) [ES-12KP](#) [SD-01A](#) [DC-044S-20A](#) [K3-1336S-F1](#) [K2-1112SQ-A4SW-01](#)
[K2-6645SP-S4SC-04](#) [K2-6639DP-I3SW-04](#) [ES-08KP](#) [ES-10KP](#) [DS-07RP](#) [K6-6610D01](#) [ES-09KP](#) [U-B-M4SS-W-1](#) [U-A-24DD-W-11](#) [K2-](#)
[1832UR-A3SW-06](#) [K3-1391C-51](#) [K2-1821SH-A4SW-06](#) [DA-12RP](#) [U-A-25DD-W-1](#) [EM-12KP](#) [DS-12BP](#) [DP-12BP](#) [TYPE-C-31-G-02](#) [ES-](#)
[05KP](#) [K3-2235S-L1](#) [DS-12RP](#) [ES-04KP](#) [ES-06KP](#) [PJ-601-5A](#) [K2-1830UQ-A4DW-06](#) [K9-1804A-1](#) [U-A-24DD-Y-7](#) [K9-1801A-7](#) [DA-12BP](#)
[K2-1821DQ-A4SW-06](#) [K6-6272S04](#) [K3-1336S-K1](#) [K9-1803N](#) [K2-1109DP-B4SW-01](#) [K2-1102AQ-A3SW-01](#) [DP-12RP](#) [K6-6147D01](#) [DC-](#)
[033-13A](#) [K2-1806SG-A4DW-04](#) [K2-1156UP-F4SW-05](#) [K9-1801A](#)