
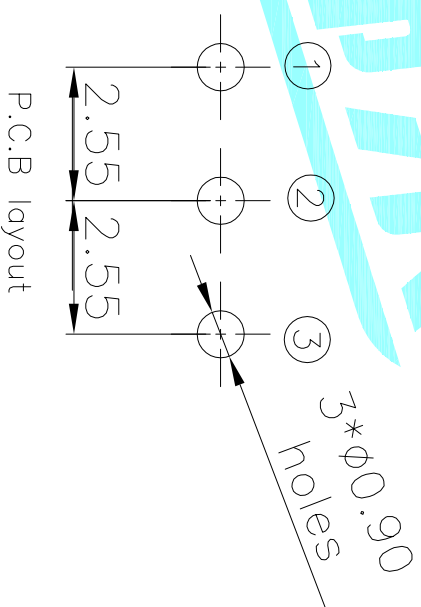
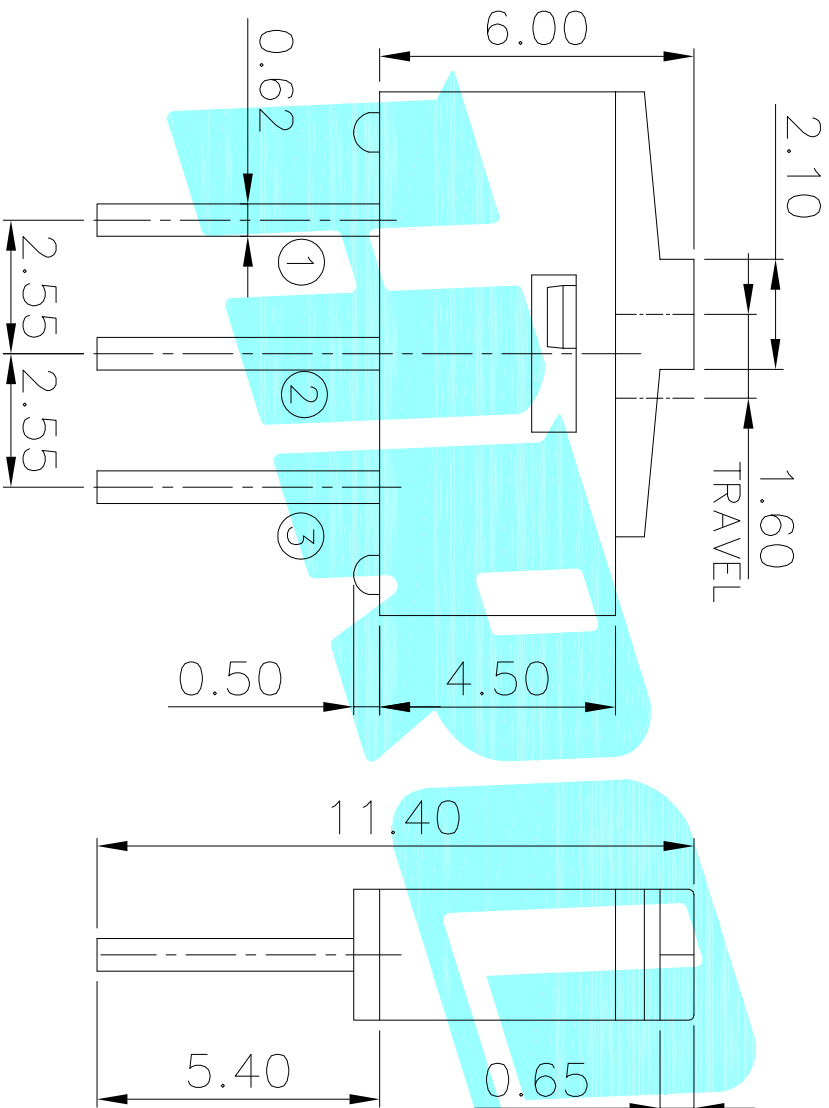


- Typical Specifications
1. Rating : 5A120V AC
  2. Insulation Resistance:100M min
  3. Dielectric Strength:1,500V RMS
  4. Operating Life : 50,000 cycles



ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Spring	---	1	Stainless Steel	Natural	---
④	Contact Clip	---	1	CS2.10	Ag Clad	---
③	Knob	---	1	PA	RED	---
②	Bose	---	1	PA	Gray	---
①	Terminal	---	3	Brass	Au Plated	---

APPROVALS	DATE	TITLE
DRAWN	JIANKUN.LIU	2015.5.25
CHECKED		
APPROVALS		

APPROVALS	PART NO.	SCALE:
	K3-1204D	1:1

TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ.
30~R/L	±0.30	mm	1:1	1
10~30	±0.20			
5~10	±0.15			
~ 5	±0.10			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO.,LTD

SLIDE SWITCHS

K3-1204D

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Toggle Switches](#) category:*

*Click to view products by [HRO parts](#) manufacturer:*

Other Similar products are found below :

[8928K478](#) [8951K2998](#) [8951K3310](#) [8956K1283](#) [8956K1286](#) [8956K1287](#) [8961K155](#) [8A1-C-222](#) [020017-13](#) [0090-0001](#) [0121-0015](#) [CS115W](#)  
[CS120W](#) [CS215I](#) [CS8275](#) [637H/25](#) [6663](#) [7101SPDV30BE](#) [7103SDV30BE](#) [7105D](#) [7108P3YAV2BE](#) [71YY50282](#) [7209SY9AQE](#)  
[7209SYCBE](#) [7300K36](#) [7301K38](#) [7301SS24484](#) [7303KZQE](#) [7306K36](#) [7310K36](#) [7503K21](#) [7506K4](#) [7565K6](#) [7595K6](#) [7660K12](#) [7691K14](#)  
[7700K1](#) [7704K3](#) [8391K108](#) [8396K108](#) [8811K17](#) [8812K14](#) [8824K14](#) [8825K5](#) [8828K13](#) [8835K3](#) [8858K44](#) [8E4011](#) [1202W](#)  
[A201SCWZB04](#)