


ROHS

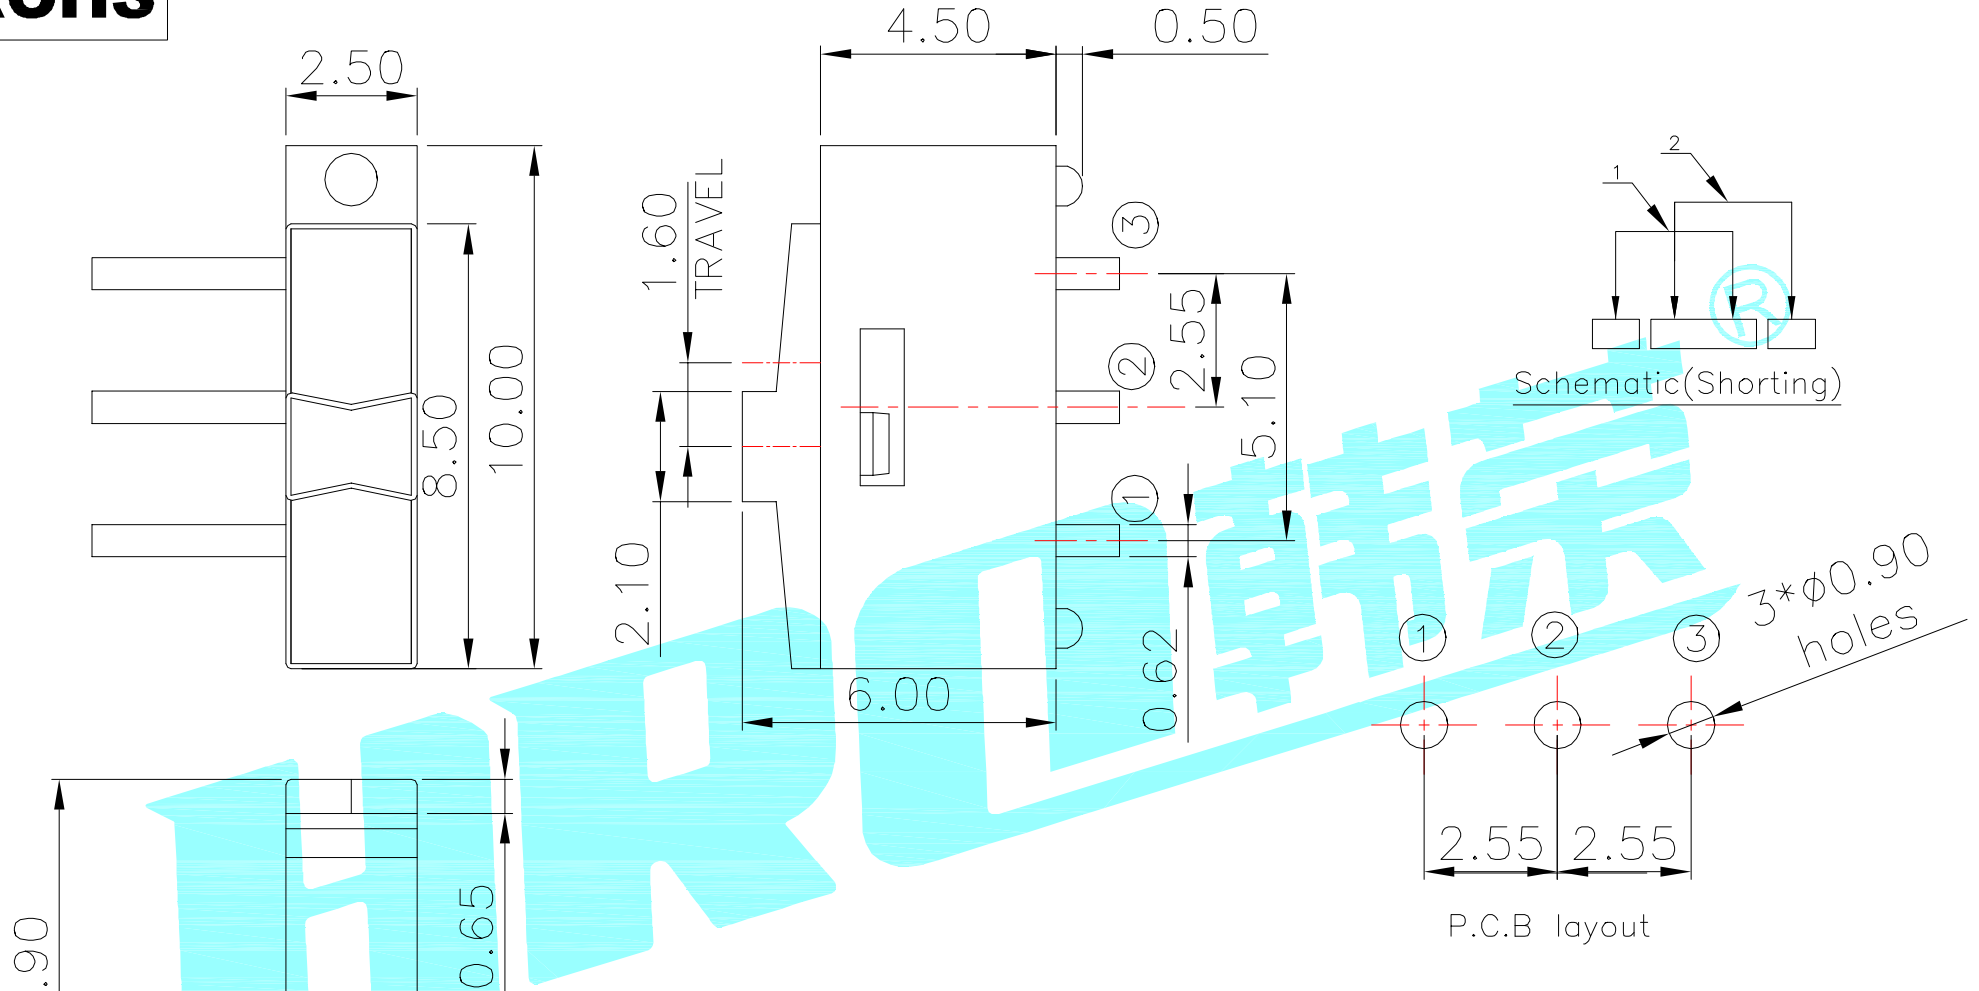

Typical Specifications

1. Rating : 5A120V AC
2. Insulation Resistance: 1,000M min
3. Dielectric Strength: 1,500V RMS
4. Operating Life : 50,000 cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Spring	—	1	Stainless Steel	Natural	—
④	Contact Clip	—	1	C5210	Ag Clad	—
③	Knob	—	1	PA	RED	—
②	Base	—	1	PA	Gray	—
①	Terminal	—	3	Brass	Au Plated	—

APPROVALS		DATE	HRO 韓泰® ELECTRONICS CO.,LTD			
DRAWN	JIANKUN.LU	2015.5.25	TITLE:	SLIDE SWITCHS		
CHECKED			PART NO.	K3-1204D-L		
APPROVALS			TOLERANCES ARE	ANGLE	UNIT: mm	SCALE: 1:1
			30~以下	±0.30	±2°	PROJ:
			10~30	±0.20		
			5~10	±0.15		
			~ 5	±0.10		
DRAWING NO.			UNIT: mm	SCALE: 1:1	PROJ:	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Slide Switches](#) category:

Click to view products by [HRO parts manufacturer](#):

Other Similar products are found below :

[6-1437581-1](#) [M43R](#) [MHS123K15D](#) [MHS133K](#) [MMD](#) [MSS12A](#) [1825074-1](#) [1825160-3](#) [1825167-2](#) [1825289-7](#) [K232CB](#) [25139NLDB](#)
[25449NAH](#) [SLB1240R45](#) [1825078-1](#) [1825080-4](#) [1825269-1](#) [1825270-2](#) [STS141RA04](#) [T2215BEN506](#) [GH46P000001](#) [GH49P010001](#)
[25339NA](#) [25436NLDH](#) [M42A](#) [AYZ0202AG](#) [L203091MS02Q](#) [4-1437581-7](#) [48BFSP3M2QT](#) [1101M1S3ZB8E2](#) [1-1437581-1](#)
[EG1218REDACTUATOR](#) [MSS2225G04](#) [MSS42G](#) [T105S1CWZBE](#) [SLB124145](#) [SLB1280R5](#) [TG39W000050](#) [25149NAH](#) [25439NAH](#)
[25436NAH6](#) [TG36Y000050](#) [SL-1211C1B8](#) [46204LRX](#) [1977143-4](#) [1977144-4](#) [HASS0194](#) [JS0001](#) [SSJ12R04](#) [GR5-1323-0800](#)