
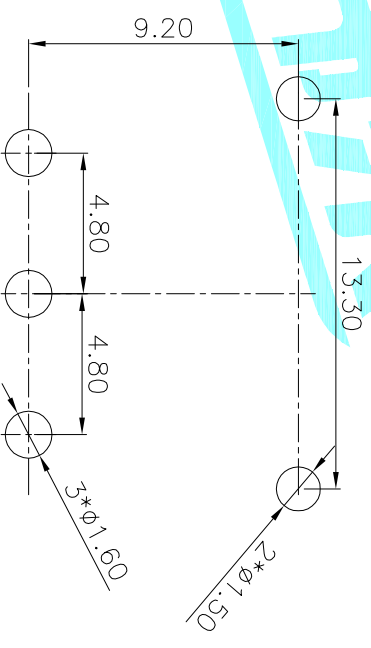


Schematic(Shorting)

- Typical Specifications
1. Rating : 3A125V AC
  2. Insulation Resistance:1,000M min
  3. Operating force:300±150gf
  4. Operating Life : 30,000 cycles

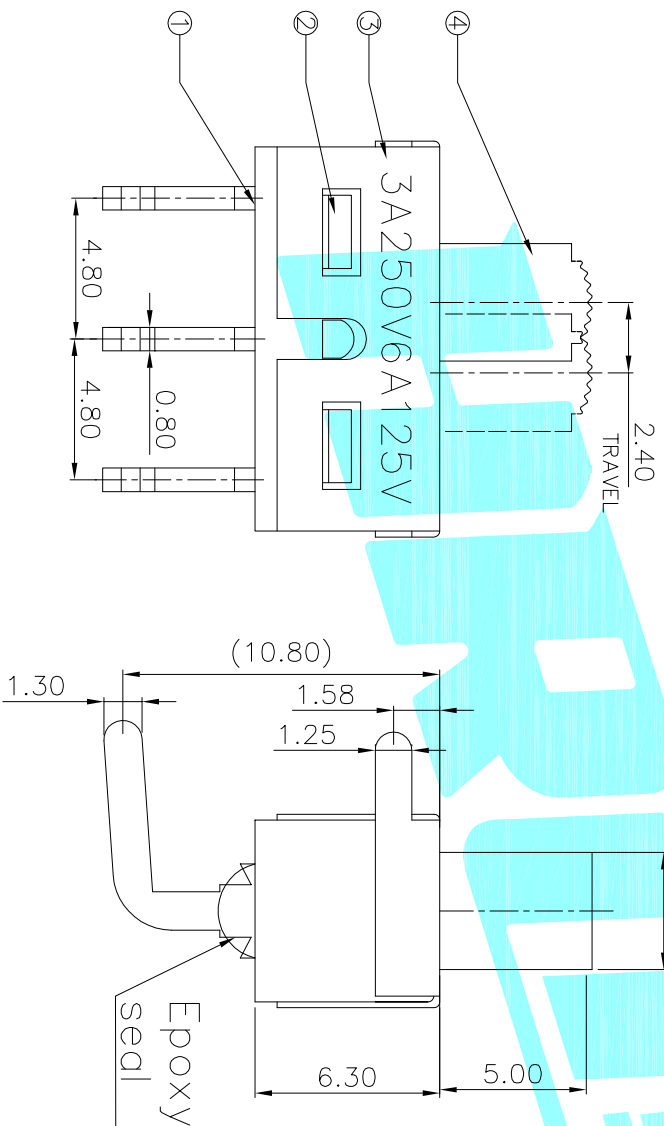

P.C.B layout

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Spring	—	1	Stainless Steel	Natural	—
⑤	Contact Clip	—	1	PBS C5210R-EH	Ag Clad	—
④	Knob	—	1	PA	Black	—
③	Frame	—	1	SPCC	Ni Plated	—
②	Base	—	1	PA	RED	—
①	Terminal	—	3	Brass Strip	Ag Plated	—

APPROVALS	DATE	APPROVALS	DATE

DRAWN: JIANKUN.LIU 2015.5.25  
**HORO** ELECTRONICS CO.,LTD

CHECKED:   
 TITLE: SLIDE SWITCHS

APPROVALS:   
 PART NO. K3-1391B

TOLERANCES ARE: 30~0.15 ±0.30 ANGLE 10~30 ±0.20 UNIT: mm SCALE: 1:1 PROD:

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Toggle Switches](#) category:*

*Click to view products by [HRO parts](#) manufacturer:*

Other Similar products are found below :

[A19HV](#) [8A1-C-222](#) [60012L](#) [6006L](#) [6663](#) [7101MD9V30GE](#) [7101SPDV30BE](#) [7103SDV30BE](#) [7105D](#) [7108P3YAV2BE](#) [71YY50282](#)  
[7201MD9AVBE](#) [7301K38](#) [7306K36](#) [7310K36](#) [7314K36](#) [7506K4](#) [7592K6](#) [7691K14](#) [7700K1](#) [8396K108](#) [8824K14](#) [8828K13](#) [G2VX](#) [G3VX](#)  
[PS83-121G](#) [A101MD9AB04](#) [A101SD9AB04](#) [A101SDCQ04](#) [A103SD9AQ04](#) [A107TZB04](#) [A123P32YZQ](#) [A123S1YZG](#) [A127S1YCQ](#) [1-](#)  
[1825192-0](#) [A131S1YZQ](#) [A201SCWZB04](#) [A207SYCB04](#) [A208J61ZQ0004](#) [A221K12KAG](#) [A221S1YZQ](#) [A221T1TCQ](#) [A232K12KZQ](#)  
[A232M1YCQ](#) [A323S1CWZQ](#) [A423S1CWZG-M8](#) [A423S1YZQ](#) [12149A-3V](#) [12156AX408](#) [12147AGKX679](#)