
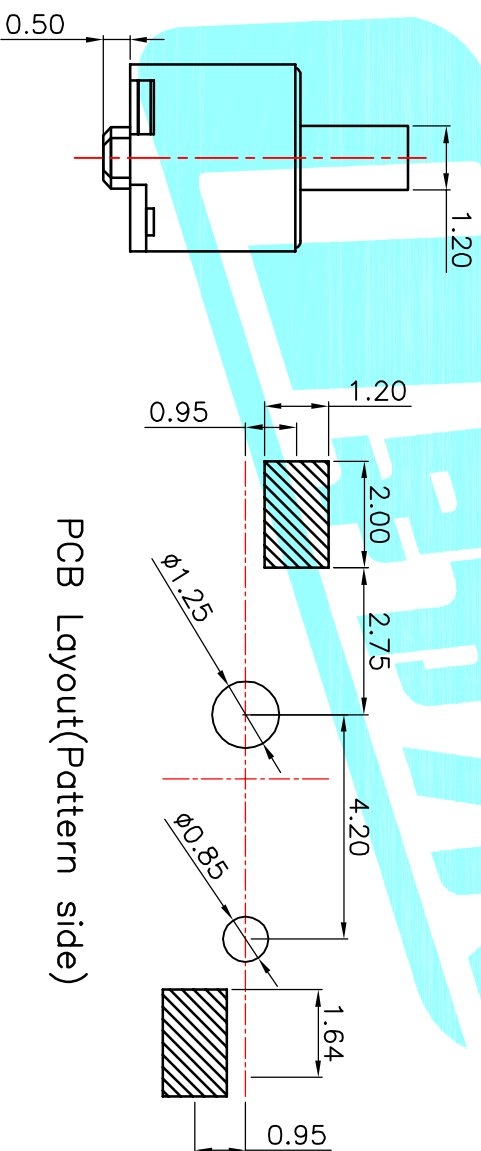


Circuit Diagram

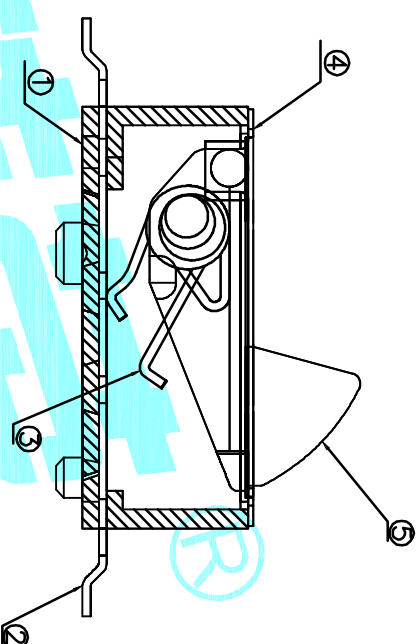

PCB Layout(Pattern side)

Typical Specifications

- 1.Rating : DC 12V 50mA
- 2.Contact Resistance: $\leq 100m\Omega$
- 3.Insulation Resistance: $\geq 100m\Omega$ DC500V
- 4.Operating Temperature Range: $-25^{\circ}C+80^{\circ}C$
- 5.Ambient Humidity Used: $\leq 85\%RH$
- 6.Operating Force : $30gf\pm 20gf$
- 7.Life : 100,000 Cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
			30 \pm 0.15	\pm 0.30	ANGLE	PART NO.
			10 \pm 0.10	\pm 0.20	UNIT: mm	SCALE: 1:1
			5 \pm 0.10	\pm 0.15	DRAWING NO.	PROJ. SHEET 1 OF 1

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Knob	—	1	NYLON	Black	—
④	Cover	—	1	SUS	Ct	—
③	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
②	Terminal	—	4	Phosphor Bronze	Ag Plated	—
①	Base	—	1	LCP	Black	—

APPROVALS	DATE	TITLE:
DRAWN JKUN.LLU	2015.03.17	ELECTRONICS CO.,LTD

CHECKED	PART NO.	DETECTOR SWITCHS
APPROVALS	K5-1216SA-01	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [HRO parts](#) manufacturer:

Other Similar products are found below :

[5SM901-S12](#) [5SM9-S12N195](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE162](#) [604HE223-6B](#) [624HE17-RB](#) [6HM82](#) [6HM89](#) [6SE1](#)
[6SX1-H58](#) [70500216](#) [70599106](#) [71051](#) [MBH2731](#) [79211923](#) [79218589](#) [7AS12](#) [MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#)
[831010C3.0](#) [831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [8SX26-H33](#) [914CE1-6G](#) [PL-100](#) [11SM1077-H4](#) [11SM1077-H58](#)
[11SM1-TN107](#) [11SM405](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#) [11SM863-T](#) [11SM866](#) [A7CN-](#)
[1M-1-LEFT](#) [A831700C7.0](#) [121EN188-R](#) [1245.0120](#) [125EN56-RB](#) [1267.0101](#) [1267.7101](#)