

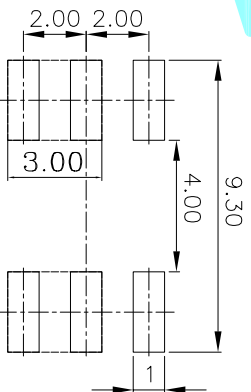



技术参数

1. 额定电流: DC30V 0.1A
2. 耐压: AC250伏 (50-60Hz) 持续1分钟
3. 接触电阻: 1欧max
4. 绝缘电阻: 100兆欧min . 500V DC.
5. 操作力: 180± 50gf.
6. 全行程: 2.0mm± 0.2mm.
7. 运行类型: 自锁/无锁
8. 寿命: 10,000次.

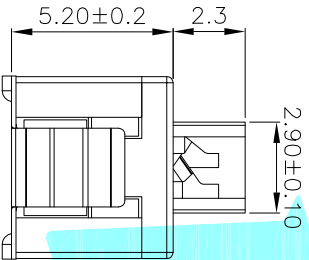

PCBLayout(pattern Side)

NO.	Operating Type	Part No.
1	Push To Lock	K8-5856S-L1
2	Push No Lock	K8-5856S-N1

⑧	Leaf spring	—	2	SUS	Natural	—
⑦	Terminal	—	6	Brass strip	Plating silver	—
⑥	Contact	—	2	Phosphor bronze	Plating silver	—
⑤	Spring	—	1	SUS	Natural	—
④	Base	—	1	Nylon	Gray	—
③	Crochet Needle	—	1	SUS	Natural	—
②	Cover	—	1	POM	Black	—
①	KNOB	—	1	POM	White	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN		J.X.Zhong	2018/08/01		HROE ELECTRONICS CO.,LTD	
CHECKED				TITLE: PUSHBUTTON SWITCHS		
APPROVALS				PART NO.		
TOLERANCES ARE		30~以上 ±0.30	10~30 ±0.20	ANGLE ±2°	UNIT: mm	SCALE: 1:1
		5~10 ±0.15	~5 ±0.10		DRAWING NO.	PROJ:
				SHEET 1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pushbutton Switches](#) category:*

*Click to view products by [HRO parts](#) manufacturer:*

Other Similar products are found below :

[LW1L-M1C10V-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M7E-HRN2](#) [67021K512](#) [67081K512X](#) [701PB580](#) [719-5504-000](#)  
[MDPSSGLFS](#) [810KSV30B](#) [MML21KA3ABK](#) [MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8646AB6X718UL](#) [8646ABUL](#)  
[FSDWH](#) [9001KXRK](#) [9001T8BK](#) [9533CD4+U574+U4922](#) [1203MRA](#) [A22EM01S](#) [A595](#) [1202A6](#) [12037A2ULCSA](#) [1203A2UL](#) [ABD122N-](#)  
[B](#) [1211390004](#) [ABN111-Y](#) [ABN400-R](#) [1211500044](#) [1211580012](#) [1212MRA](#) [1232A6NF](#) [RA3CSH6A](#) [1241.1183.7047](#) [1241.2511](#)  
[1241.3428](#) [1223A2ULCSA](#) [1223MRA](#) [1232AX2119](#) [1241.1183.8000](#) [1241.1183.8029](#) [1241.2506](#) [1241.2606](#) [12MA6](#) [1301940184](#)  
[RELBARF6X10\(PLASTIC\)](#) [13435AG](#)