



Circuit Diagram



P.C.B layout

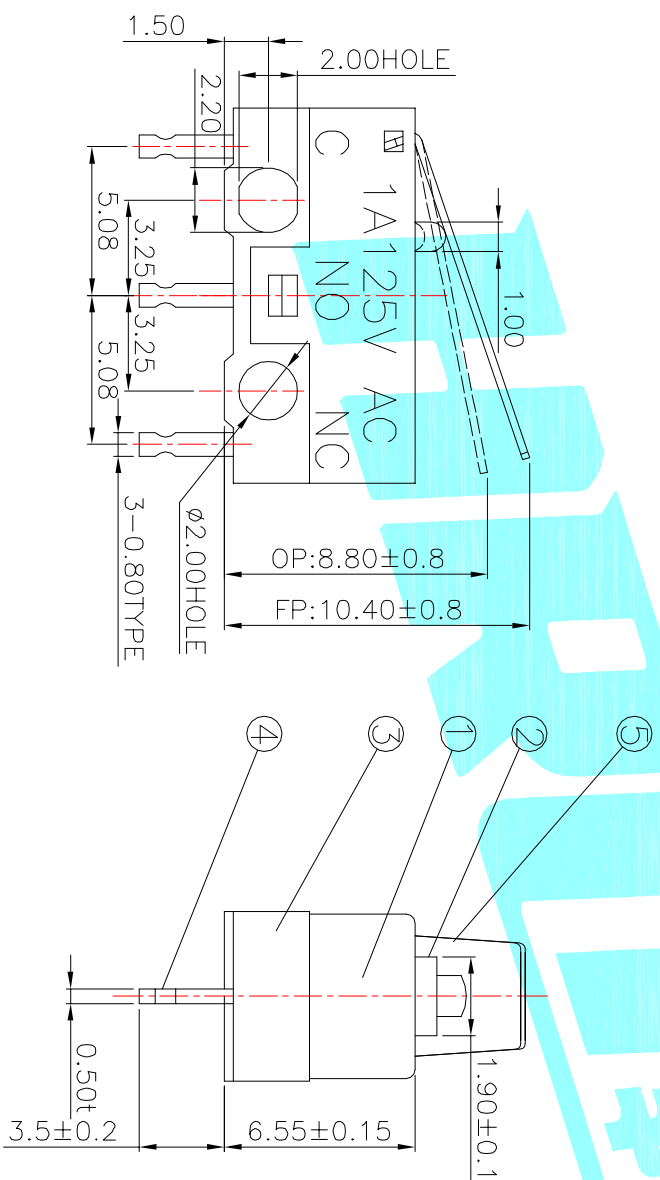

NOTE:
 1. Rating:DC30V 0.1A
 2.OP:8.8±0.8
 3.Operating force:30±15gf
 4.Mechanical Life:3,000,000

⑦	Shrapnel	1	Beryllium Copper		
⑥	Contact	1	Ag		
⑤	Lever	1	Stainless Steel		
④	Terminal	3	Bross(0.50t)	Plating silver	
③	Housing	1	PBT	White	
②	Knob	1	POM	White	
①	Cover	1	PBT	Black	

APPROVALS		DATE	ELECTRONICS CO.,LTD	
DRAWN	JKUN.LLU	2013/6/4	MICRO SWITCHS	
CHECKED			PART NO. K9-1267H-H116	
APPROVALS			TITLE: MICRO SWITCHS	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	30~0.1t ±	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROD.	SHEET
	A		NEW				10~30 ±	±0.20					PROJ.	1 OF 1
							5~10 ±	±0.15	±2'					

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [HRO parts manufacturer](#):

Other Similar products are found below :

[5SM901-S12](#) [5SM9-S12N195](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE223-6B](#) [624HE17-RB](#) [6HM82](#) [6SE1](#) [6SX1-H58](#) [70500216](#)
[70599106](#) [71051](#) [714-0293](#) [MBH2731](#) [79211923](#) [79218589](#) [MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)
[831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [8SX26-H33](#) [914CE1-6G](#) [11SM1077-H4](#) [11SM1077-H58](#) [11SM1-TN107](#) [11SM405](#)
[11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#) [11SM77-T](#) [11SM863-T](#) [11SM866](#)
[A831700C7.0](#) [121EN188-R](#) [1245.0120](#) [125EN56-RB](#) [D433V3RD](#) [1267.0101](#) [1267.7101](#) [D4BFC1](#)