

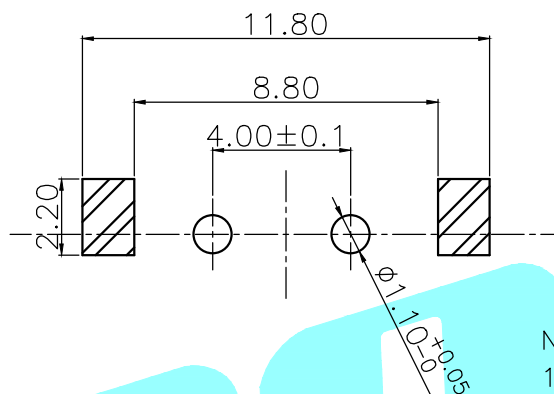
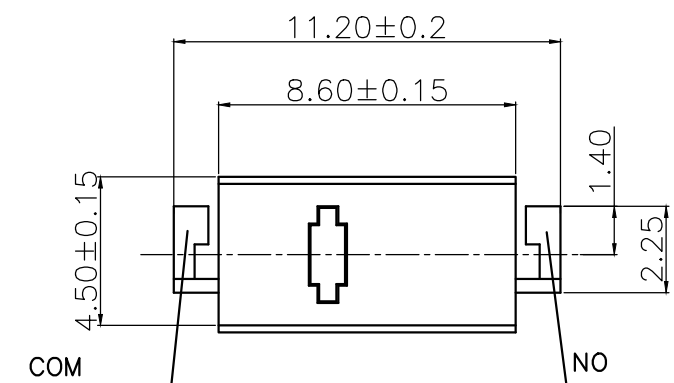

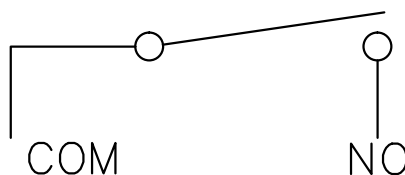
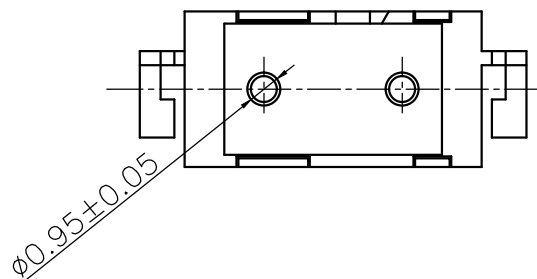


ROHS

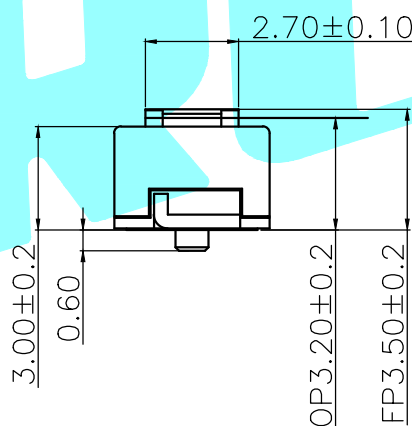

NOTE:

1. Rating: DC 6V 1mA (Min load DC 3V 15uA).
2. Contact resistance: 100mΩ Max.
3. Insulation resistance: 100MΩ Min (at DC 500V)
4. Withstand voltage: AC 600V (50-60Hz) for 1 minute
5. OP: 3.2±0.2mm.
6. Return force: 15gf Min.
7. Mechanical Life: 5,000,000
8. Operating temperature: -25°C to 85°C

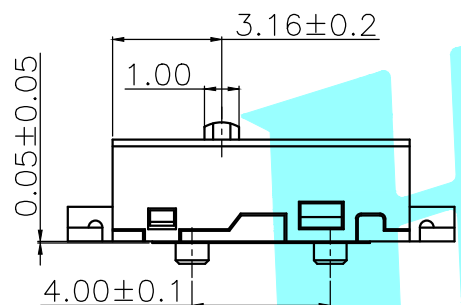

PART NO	vigor(gf)
K9-8601A-01	60±20
K9-8601A-02	90±20
K9-8601A-03	120±30

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Knob	—	1	PPA	Blue	—
⑤	Cover	—	1	PPA	Black	—
④	Shrapnel	—	1	Copper alloy	Material	—
③	Contact	—	1	Silver alloy	Material	—
②	Housing	—	1	LCP	Black	—
①	Terminal	—	2	Brass	Plating silver	—

APPROVALS		DATE		HRO 韓榮® ELECTRONICS CO., LTD		
DRAWN	J.X.Zhang	2019/8/1		TITLE:	MICRO SWITCH	
CHECKED				PART NO.		
APPROVALS				TOLERANCES ARE	ANGLE	UNIT: mm
		30~以上	±0.30	±2'	SCALE: 1:1	PROJ:
		10~30	±0.20		DRAWING NO.	
		5~10	±0.15			
		~ 5	±0.10			SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Basic / Snap Action Switches](#) category:

Click to view products by [HRO parts manufacturer](#):

Other Similar products are found below :

[5SM901-S12](#) [5SM9-S12N195](#) [602EN532](#) [602EN535-RB](#) [602HE5-RB1](#) [604HE223-6B](#) [624HE17-RB](#) [6HM82](#) [6SE1](#) [6SX1-H58](#) [70500216](#)
[70599106](#) [71051](#) [714-0293](#) [MBH2731](#) [79211923](#) [79218589](#) [MIL30126AB6BBMD4A12XAU](#) [ML-1155](#) [ML-1376](#) [831010C3.0](#)
[831090C2.EL](#) [83131904](#) [84212012](#) [8AS239](#) [8HM73-3](#) [8SX26-H33](#) [914CE1-6G](#) [11SM1077-H4](#) [11SM1077-H58](#) [11SM1-TN107](#) [11SM405](#)
[11SM703-T](#) [11SM8423-H2](#) [11SX37-T](#) [11SX48-H58](#) [11SM2442-T](#) [11SM76-T](#) [11SM77-H58](#) [11SM77-T](#) [11SM863-T](#) [11SM866](#)
[A831700C7.0](#) [121EN188-R](#) [1245.0120](#) [125EN56-RB](#) [D433V3RD](#) [1267.0101](#) [1267.7101](#) [D4BFC1](#)