
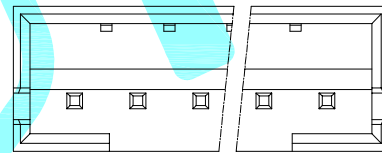


Poles	PART NO	DIM A	DIM B
2	PH-2A	2.0	6.1
3	PH-3A	4.0	8.1
4	PH-4A	6.0	10.1
5	PH-5A	8.0	12.1
6	PH-6A	10.0	14.1
7	PH-7A	12.0	16.1
8	PH-8A	14.0	18.1
9	PH-9A	16.0	20.1
10	PH-10A	18.0	22.1
11	PH-11A	20.0	24.1
12	PH-12A	22.0	26.1
13	PH-13A	24.0	28.1
14	PH-14A	26.0	30.1
15	PH-15A	28.0	32.1
16	PH-16A	30.0	34.1

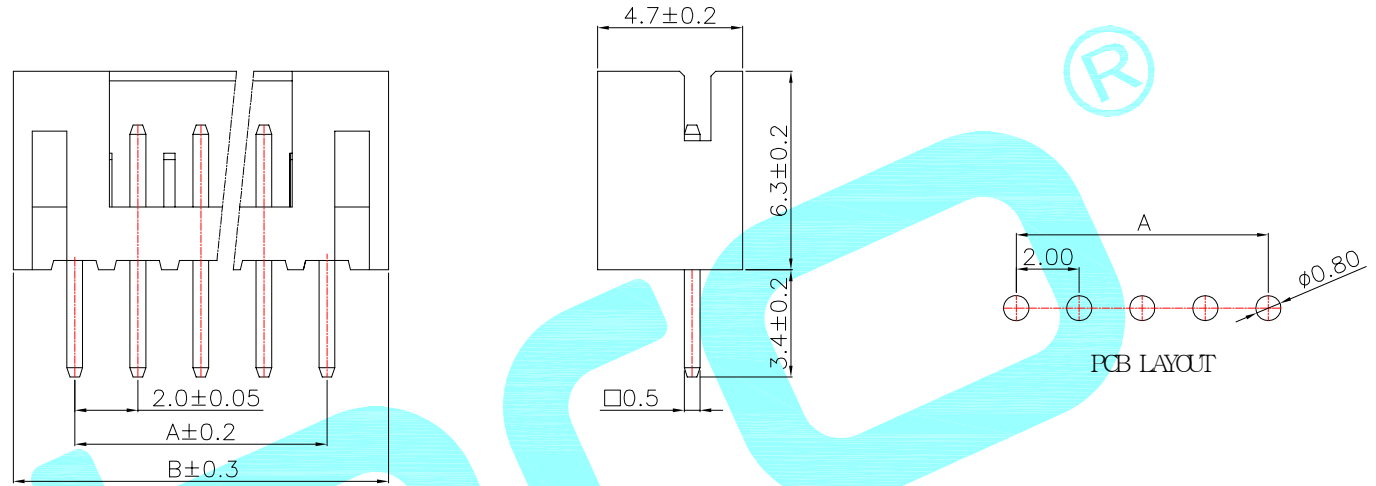

- 1.Pin pitch: 2.0
- 2.Rated voltage: 250V DC/AC
- 3.Contact resistance: ≤20mΩ
- 4.Insulation resistance: ≥1000MΩ
- 5.Operating temperature: -25°C~+85°C

②	PIN	—	—	Brass	Sn Plated	—
①	Base	—	1	PA66	Natural	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE				
DRAWN	LIUCAN	2021.10.22				
APPROVALS				PART NO.	PH-nA	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15	±2'	DRAWING NO.	SHEET 1 OF 1
		~ 5	±0.10			

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HRO parts](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)