


P.C.B Layout (copper-sided view)

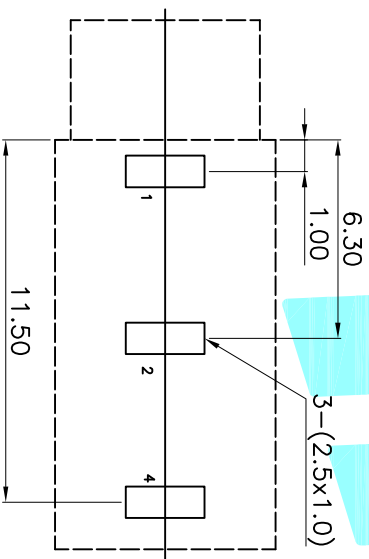

Model NO	A=φ6	PJ-3136A
	A=M6xP0.5	PJ-3136B
Schematic		

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3~20N  
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.																																																																				
	A		NEW																																																																							
<table border="1"> <tr> <td>② Terminal</td> <td>—</td> <td>3</td> <td>Phosphor bronze</td> <td>Au Plating</td> <td>—</td> </tr> <tr> <td>① Housing</td> <td>—</td> <td>1</td> <td>Nylon</td> <td>Black</td> <td>—</td> </tr> <tr> <td>ITEM</td> <td>PART NAME</td> <td>TER/NO.</td> <td>QTY.</td> <td>MATERIAL</td> <td>FINISHING</td> <td>REMARK</td> </tr> <tr> <td colspan="2">APPROVALS</td> <td>DATE</td> <td colspan="4"></td> </tr> <tr> <td>DRAWN</td> <td>J.X.Zhang</td> <td>2013/11/11</td> <td colspan="4"></td> </tr> <tr> <td>CHECKED</td> <td></td> <td></td> <td colspan="4">TITLE: PHONE JACKES</td> </tr> <tr> <td>APPROVALS</td> <td></td> <td></td> <td colspan="4">PART NO. PJ-3136□</td> </tr> <tr> <td colspan="3">TOLERANCES ARE</td> <td>30<sup>+0.15</sup><sub>-0.10</sub></td> <td>±0.30</td> <td>±0.20</td> <td>ANGLE</td> </tr> <tr> <td></td> <td>5<sup>+0.10</sup><sub>-0.05</sub></td> <td>±0.15</td> <td>±2°</td> <td>UNT: mm</td> <td>SCALE: 1:1</td> <td>PROJ: </td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>DRAWING NO.</td> <td></td> <td>SHEET 1 OF 1</td> </tr> </table>							② Terminal	—	3	Phosphor bronze	Au Plating	—	① Housing	—	1	Nylon	Black	—	ITEM	PART NAME	TER/NO.	QTY.	MATERIAL	FINISHING	REMARK	APPROVALS		DATE					DRAWN	J.X.Zhang	2013/11/11					CHECKED			TITLE: PHONE JACKES				APPROVALS			PART NO. PJ-3136□				TOLERANCES ARE			30 <sup>+0.15</sup> <sub>-0.10</sub>	±0.30	±0.20	ANGLE		5 <sup>+0.10</sup> <sub>-0.05</sub>	±0.15	±2°	UNT: mm	SCALE: 1:1	PROJ:					DRAWING NO.		SHEET 1 OF 1
② Terminal	—	3	Phosphor bronze	Au Plating	—																																																																					
① Housing	—	1	Nylon	Black	—																																																																					
ITEM	PART NAME	TER/NO.	QTY.	MATERIAL	FINISHING	REMARK																																																																				
APPROVALS		DATE																																																																								
DRAWN	J.X.Zhang	2013/11/11																																																																								
CHECKED			TITLE: PHONE JACKES																																																																							
APPROVALS			PART NO. PJ-3136□																																																																							
TOLERANCES ARE			30 <sup>+0.15</sup> <sub>-0.10</sub>	±0.30	±0.20	ANGLE																																																																				
	5 <sup>+0.10</sup> <sub>-0.05</sub>	±0.15	±2°	UNT: mm	SCALE: 1:1	PROJ:																																																																				
				DRAWING NO.		SHEET 1 OF 1																																																																				
<p><b>OKHRO</b>                  ELECTRONICS CO.,LTD</p>																																																																										

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:*

*Click to view products by [HRO parts](#) manufacturer:*

Other Similar products are found below :

[30-1231](#) [30-528](#) [30-504](#) [30-519](#) [33DVIR-24S1B](#) [47648-2000](#) [2002-400](#) [TC142X](#) [769-103/021-000](#) [RCP2500-AMP](#) [1932649-1](#)

[CP30200GM3](#) [67881](#) [HBLBH](#) [HBLBI](#) [HAFBG](#) [HAFBH](#) [HAGBF](#) [HAGBG](#) [HAGBJ](#) [HBLBJ](#) [AABIE](#) [AABIF](#) [AABIG](#) [AABIH](#) [AABIJ](#)

[AABIK](#) [AACBE](#) [AACBF](#) [AACBG](#) [ABIBF](#) [ABIBG](#) [ABIBH](#) [AACBH](#) [AACBI](#) [AACBJ](#) [AACBK](#) [AACBL](#) [AAIBD](#) [AAIBF](#) [AAIBI](#) [AANBJ](#)

[AAQBG](#) [AAQBH](#) [AAQBI](#) [AARBG](#) [AARBH](#) [AARBI](#) [AAXBD](#) [ABAAF](#)