


P.C.B Layout TOP view

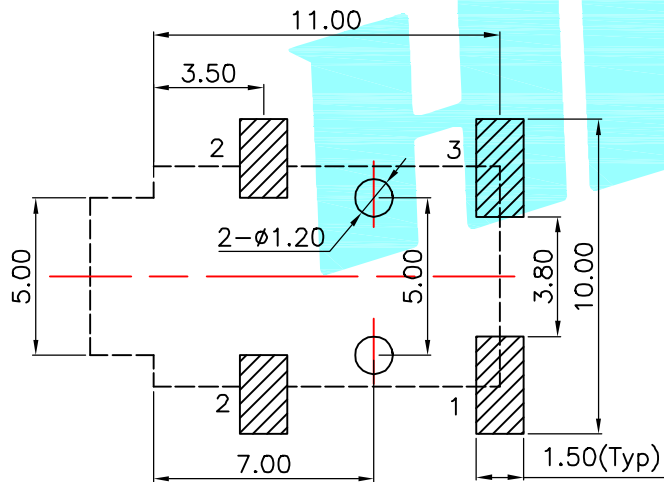

Model NO	PJ-321A
Schematic	

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3~20N
 Operating Life:5,000cycles

②	Terminal	4	Phosphor bronze	Au Plating		
①	Housing	1	Nylon	Black		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		 ELECTRONICS CO.,LTD		
DRAWN	J.X.Zhang	2013/11/11				
CHECKED				TITLE:	PHONE JACKES	
APPROVALS				PART NO.	PJ-321A	
TOLERANCES ARE		30~10	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20	±2'	DRAWING NO.	PROJ.
		5~10	±0.15			
		~ 5	±0.10			SHEET 1 OF 1

ECN NO.	REV.	DATE.	NEW	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:

Click to view products by [HRO parts manufacturer](#):

Other Similar products are found below :

[30-1231](#) [30-528](#) [30-504](#) [30-519](#) [33DVIR-24S1B](#) [47648-2000](#) [2002-400](#) [TC142X](#) [769-103/021-000](#) [1932649-1](#) [CP30200GM3](#) [67881](#)
[HAFBF](#) [HBLBI](#) [HAFBG](#) [HAGBF](#) [HAGBG](#) [HAGBI](#) [HBLBJ](#) [AABIE](#) [AABIF](#) [AABIH](#) [AABII](#) [AABIJ](#) [AABIK](#) [AACBG](#) [ABIBF](#) [ABIBG](#)
[ABIBH](#) [ACEB0](#) [AACBK](#) [AACBL](#) [AAIBF](#) [AAIBI](#) [AANBF](#) [AANBG](#) [AANBI](#) [AANBJ](#) [AAQBH](#) [AAQBI](#) [AARBG](#) [AAXBD](#) [ABAAF](#)
[ABBBF](#) [AIKB0](#) [AIPB0](#) [AIRB0](#) [CC-HDMIL-1.8M](#) [HBLBG](#) [49883](#)