
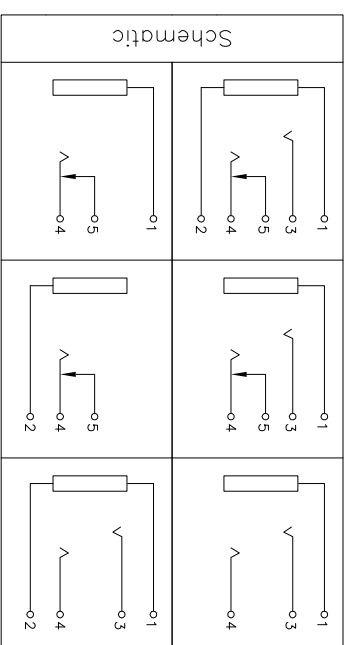


P.C.B Layout TOP view

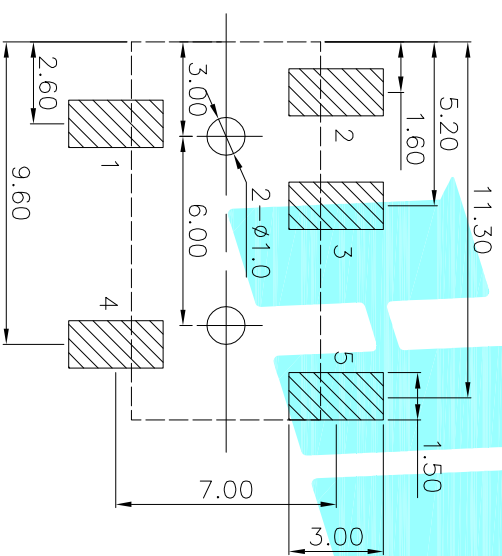

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
<p>Rating:0.5A 30V DC          Contact Resistance:100 mΩ Max.          Operating temperature:-20℃~70℃          Operating force:3-20N          Operating Life:5,000cycles</p>						
APPROVALS			DATE	TITLE:		
DRAWN J.X.Zhang			2018/3/14	ELECTRONICS CO.,LTD		
CHECKED				PHONE JACKES		
APPROVALS				PJ-327B		
TERMINALS ARE			30~Ø1.1 ±0.30 ANGLE	PART NO.		
10~30 ±0.20 ANGLE				UNIT: mm		
5~10 ±0.15 ±2°				SCALE: 1:1		
				DRAWING NO.		
				SCALE: 1:1		
				PROJ. 1 OF 1		
				SHEET 1 OF 1		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:*

*Click to view products by [HRO parts](#) manufacturer:*

Other Similar products are found below :

[1775247-3](#) [2-1932649-5](#) [30-1231](#) [30-528](#) [2069485-1](#) [30-504](#) [30-519](#) [30-542](#) [47648-2000](#) [2002-400](#) [1453G1](#) [769-103/021-000](#) [1932649-1](#)  
[233-368NFG6-17NH](#) [G45A19071083HR](#) [233-360NF00-17NH](#) [CP30200GM3B](#) [HYC02-DVI29-371](#) [P136-06NHDV4KBP](#) [CP30116](#)  
[LTWDID-29PFFS-SL8001](#) [46765-1301](#) [1211-0010-201-001](#) [47271-1004](#) [32-1121-BU](#) [DS1117-BN0-TME-002](#) [MHDR2A11004BP](#)  
[EHHDMI2PKG](#) [1903015-3](#) [DS1114-BN0](#) [WPUSBAF](#) [500254-1931](#) [UAD011FM](#) [HDMR-19-01-F-SM](#) [47151-1071](#) [1747981-1](#) [0480372000](#)  
[0482580001](#) [D121073-19](#) [472710111](#) [HDMI-S-RA6-SMT-MF-15](#) [P142-000-UP](#) [P134-003](#) [P120-08N](#) [KDMIX-FS1V-WS-B](#) [P142-000-UD](#)  
[P132-000](#) [P130-000](#) [P142-06N-MICRO](#) [P142-000-MINI](#)