
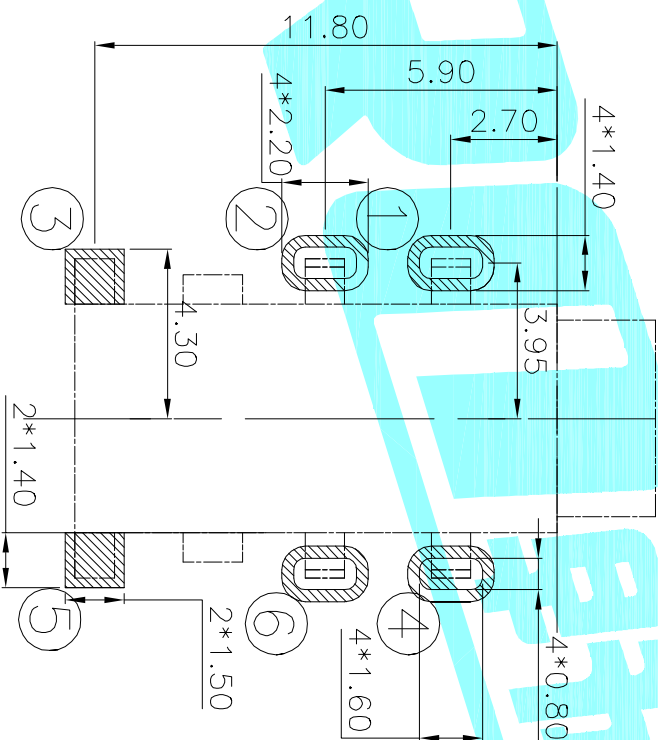


CIRCUIT DIAGRAM

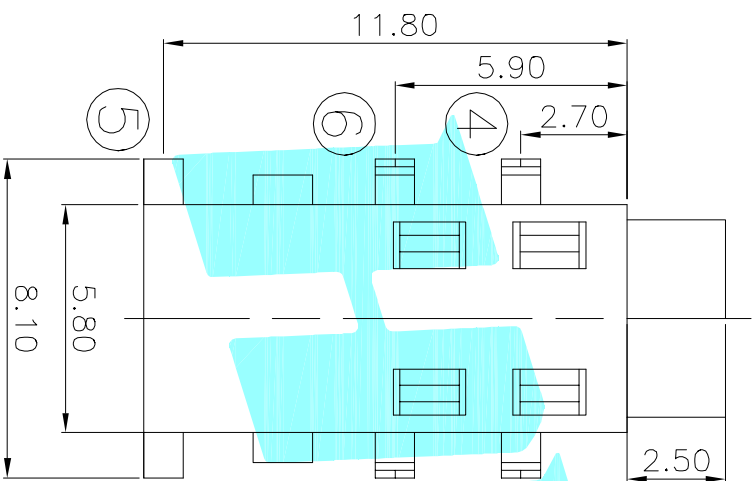

PCB Layout

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

② Terminal	3	Phosphor bronze	Au Plating			
① Housing	1	Nylon	Black			
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN		J.K.Zhong	2013/11/11	TITLE: PHONE JACKES		
CHECKED				PART NO. PJ-399B		
APPROVALS				ELECTRONICS CO.,LTD		
TOLERANCES ARE		30~80 ±0.30	ANGLE	SCALE: 1:1		
		10~30 ±0.20		UNIT: mm		
		5~10 ±0.15	±2'	DRAWING NO.		
		~5 ±0.10		PROJ. SHEET 1 OF 1		
ECN NO.	REV.	DATE.	DESCRIPTION.	CHECK.	APPRO.	
	A		NEW			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular DIN Connectors](#) category:

Click to view products by [HRO parts](#) manufacturer:

Other Similar products are found below :

[D38999/26FE99SN L/C](#) [75-068624-02M](#) [75-069228-21J](#) [7519021610P](#) [75-190224-28S](#) [7547401103P](#) [75-474014-07L](#) [FRCIR030FP-28-21S](#)
[FRCIR030RFP-40A-38P-F80](#) [FRCIR06CFZ-18-12S-F80](#) [FRCIR06F-40A-38S-F80](#) [FRCIR06R-18-12P](#) [88-559975-75P](#) [88-569735-06P](#)
[8R3006A18M0033](#) [GTC00G-24-7S](#) [PT05A-14-18SW\(023\)](#) [PT05A-14-5SX](#) [GTC01A-22-28P](#) [PT05A1832SW](#) [PT05A2041SX](#) [PT05E-8-4SW](#)
[GTC030-20-27PW-LC](#) [GTC030A-20-33S](#) [1211290078](#) [1211810025](#) [ACC06AF-20-23P\(003\)](#) [1210503216](#) [1211290084](#) [1211500027](#)
[ACS00E14S-A7P-003](#) [D38999/40FB35AN](#) [D38999/40FB35BB](#) [D38999/40WB35BN](#) [D38999/40WD35PN](#) [D38999/40WD5AN](#)
[D38999/40WJ29SN-L/C](#) [D38999/40WJ4BN](#) [D38999/42FB35BN](#) [D38999/42WB35AB](#) [D38999/42WB35PB-L/C](#) [D38999/42WJ19AN](#)
[D38999/44WB35AN](#) [D38999/44WD35BN](#) [D38999/44WF11PN-L/C](#) [D38999/44WH21AN](#) [D38999/44WH35AN](#) [D38999/44WJ29BA](#)
[D38999/44WJ35PN](#) [D38999/44WJ61BA](#)