
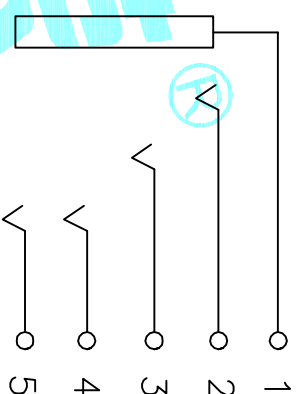
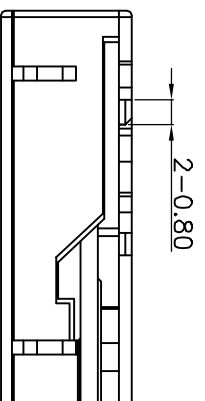
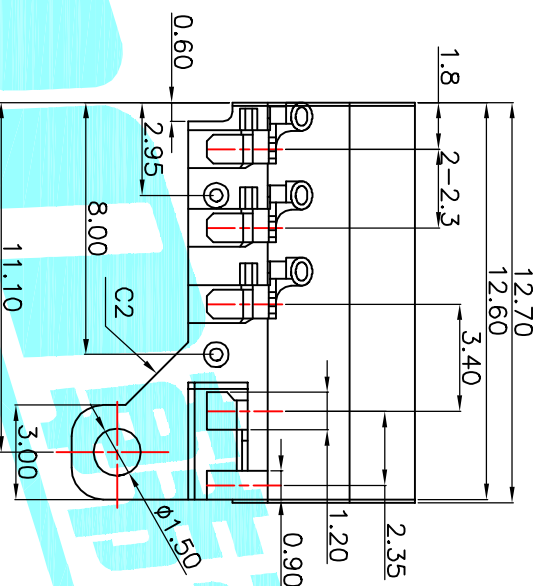


P.C.B Layout

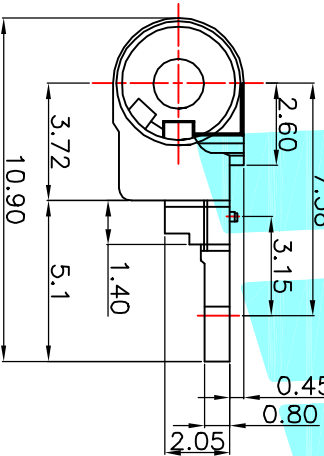

CIRCUIT DIAGRAM

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

② Terminal	—	5	Phosphor bronze	Au Plating	
① Housing	—	1	Nylon	Black	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE			
DRAWN		xu qi feng	2014.11.26		
CHECKED					
APPROVALS		TITLE:		PART NO.	
		PHONE JACKETS		PJ-607	
HARPOON ELECTRONICS CO.,LTD					
TOLERANCES ARE		30 ^{+0.15} _{-0.10}	±0.30	ANGLE	UNIT: mm
		5-10	±0.15	±2°	SCALE: 1:1
		~5	±0.10		PROJ-
ECON NO.	REV.	DATE.	DESCRIPTION.		SHEET 1 OF 1
	A		NEW		
			CHANGE.		
			CHECK.		
			APPRO.		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular DIN Connectors](#) category:

Click to view products by [HRO parts manufacturer](#):

Other Similar products are found below :

[M83723/76W22326](#) [M83723/78R22327](#) [D38999/26FE99SN L/C](#) [75-069228-21J](#) [7519021610P](#) [75-190224-28S](#) [803000A09M040](#)
[FRCIR020R-18-19S](#) [FRCIR030FP-28-21S](#) [FRCIR030RFP-40A-38P-F80](#) [FRCIR06F-40A-38S-F80](#) [FRCIR06R-14S-6S](#) [FRCIR08CFZ-22-14S-F80](#) [88-569723-03P](#) [88-569735-06P](#) [88-569769-19P](#) [8R3006A18M0033](#) [GTC00G-24-7S](#) [PT05A-14-18SW\(023\)](#) [PT05A-14-5SX](#)
[PT05A1832SW](#) [PT05A2041SX](#) [GTC030-20-27PW-LC](#) [1211290078](#) [1211810025](#) [ACC06AF-20-23P\(003\)](#) [1210503216](#) [1211290084](#)
[ACS00F-16-10S\(003\)](#) [ACS06AF-16-10P\(003\)](#) [D38999/40FB35AN](#) [D38999/40FB35BB](#) [D38999/40WB35BN](#) [D38999/40WD35PN](#)
[D38999/40WJ29SN-L/C](#) [D38999/40WJ4BN](#) [D38999/42FB35BN](#) [D38999/42WB35AB](#) [D38999/42WB35PB-L/C](#) [D38999/42WJ19AN](#)
[D38999/42WJ24PN-L/C](#) [D38999/44WB35AN](#) [D38999/44WH21AN](#) [D38999/44WH35AN](#) [D38999/44WJ29BA](#) [D38999/44WJ35PN](#)
[D38999/44WJ61BA](#) [12DL6MX](#) [AFD54-10-6PN-6117 L/T](#) [AFD57-22-12S-6141](#)