


ECON NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

TOLERANCES ARE	±2°	DRAWING NO.	SCALE: 1:1	PROJ.
30~PL	±0.30	UNIT: mm		
10~30	±0.25			
5~10	±0.20			
~5	±0.15			

APPROVALS		DATE	DRAWN		CHECKED		APPROVALS	
APPROVALS		2014/9/29	JKUN.LU		SIM		APPROVALS	
APPROVALS			ELECTRONICS CO.,LTD		TITLE:		PART NO.	
APPROVALS			ELECTRONICS CO.,LTD		TITLE:		PART NO.	
APPROVALS			ELECTRONICS CO.,LTD		TITLE:		PART NO.	




ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
①	Housing		1	LCP	Black	
②	Terminal		6	Phosphor Bronze	Sn Plated	
③	Shell		1	SUS	N! Plated	
④	Spring		1	SUS	N! Plated	
⑤	Clasp		1	SUS	N! Plated	
⑥	Sliding Block		1	LCP	Black	

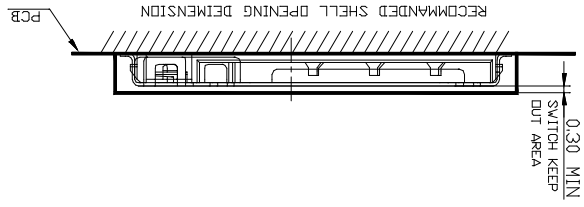

ALL SOLDER-TAIL&PAD COPLANARITY 0.08MAX

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - 1-1. CURRENT RATING: 0.5 Amp. MAX.
 - 1-2. VOLTAGE: 100V DC. MAX.
 - 1-3. LDV LEVEL CONTACT RESISTANCE: 100 mOhms MAX. INITIALLY.
 - 1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
 - 1-5. INSULATION RESISTANCE: (INITIAL) 1000MOhms MIN. (FINAL) 100MOhms MIN.
 - MECHANICAL CHARACTERISTICS:
 - MIL-STD-202, METHOD 302.
 - 2-1. DURABILITY: 5000 CYCLES.
 - 2-2. OPERATING TEMP. RANGE: -25°C TO 85°C.
 - 2-3. STORAGE TEMP.: -40°C TO 85°C.
- BY APPLYING 500V DC UNMATED AND UNMATED CONNECTORS THROUGH

PINNO.	CONNECTOR TERMINAL
P1	VCC:PWRSIGNALANDGND
P2	RST: RESET SIGNAL
P3	CLK:CLOCKING SIGNAL
P4	GND:RWSIGNALANDGND
P5	VFP: PROGRAMMING VOLTAGE
P6	IO:SERIALDATAINPUTOUTPUT

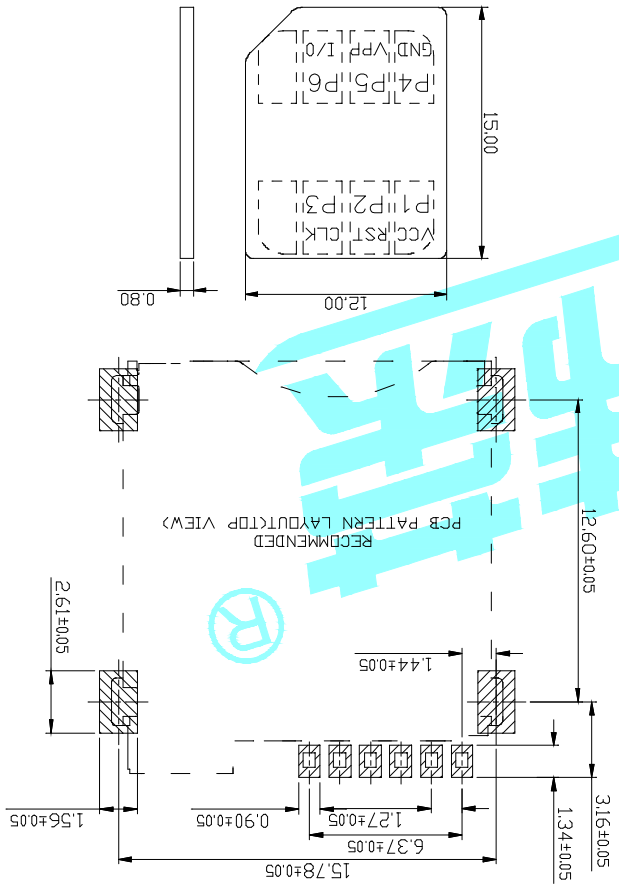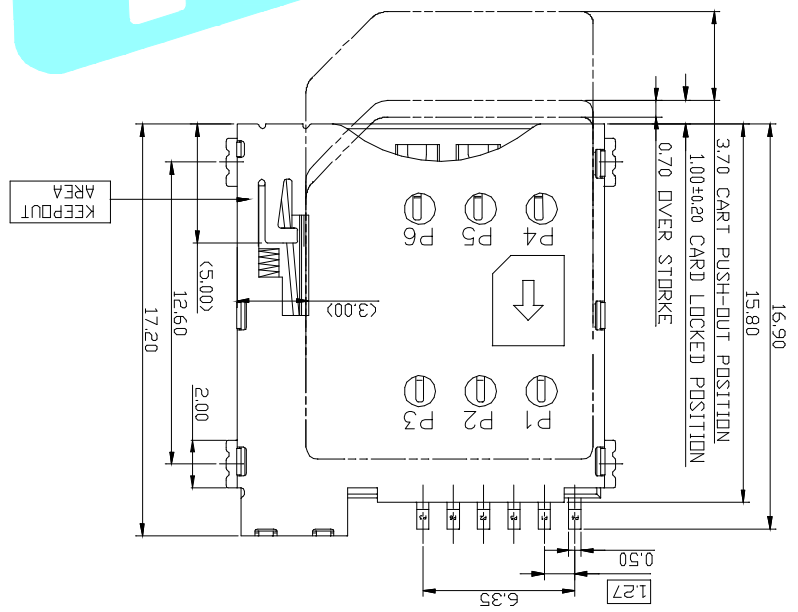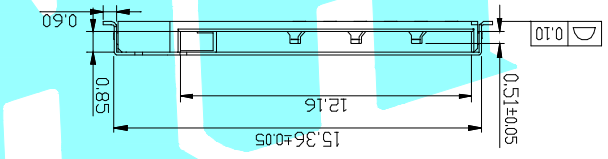

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Memory Card Connectors](#) category:

Click to view products by [HRO parts manufacturer](#):

Other Similar products are found below :

[M10-597810-355](#) [M21-033321-005](#) [6426-201-21343](#) [69.920.0553.0](#) [MCR60A-98D-2.54DSA\(70\)](#) [FCN-568P068-G/07-4V](#) [809180410000000](#)
[95622-003LF](#) [AD2-262F-38900-232](#) [DM3AT-SF-PEJM5\(41\)](#) [EN2997S72039F6](#) [N7E50-7516PG-20-WF](#) [IC11S-BUR-PNEJL\(71\)](#) [NX30TA-](#)
[15PAA\(50\)](#) [21920-5](#) [2041353-2](#) [FUA006-3220-0](#) [308-DS1P0811-192](#) [33CFAE-DN](#) [MI21A-50PD-SF-EJR\(91\)](#) [502431-1011](#) [5175651-2](#) [10-](#)
[247926-166](#) [10-629549-258N](#) [11327-001](#) [11327-002](#) [EN2997S02039B8](#) [EN2997S61212BN](#) [EN2997S72039B6](#) [EN2997SE02039B8](#)
[EN2997SE61212BN](#) [EN2997SE72039B6](#) [603020000](#) [617230001](#) [71-252718-32P](#) [NX1-32T-KT3K\(05\)](#) [95622-003LF](#) [91-570124-15P](#)
[192900-0488](#) [N7E50-U516RB-50-SIN0005](#) [DM1AA-SF-PEJ](#) [95079-00CALF](#) [84648-056HLF](#) [68-580163-21S](#) [33DVIR-29S12R](#)
[SF58S006VBBR2000](#) [93-570123-08P](#) [GMC020080HR](#) [125A-78C00](#) [1010040575#](#)