
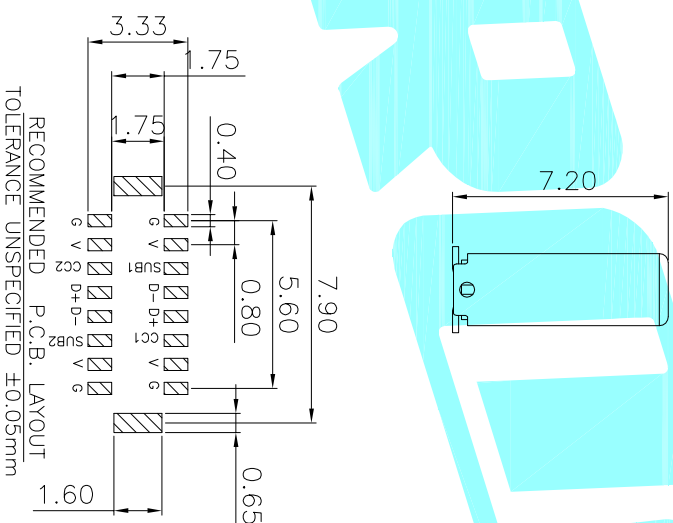
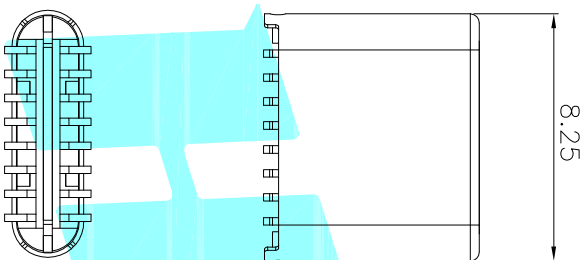


GND			Vbus		D-	D+	Vbus			GND
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2



主要特性:
 1 额定电流: 0.5A
 2 接触阻抗: 30mΩ MAX
 3 绝缘阻抗: 100MΩ MIN 250V DC
 4 耐压测试: 250V AC
 5 沾锡性: 温度250±5℃, 时间5±0.5s
 6 整体插入力: 3.57kgf MAX
 整体拔出力: 1.02kgf MIN

4	PLASTIC	HIGH TEMP	Black/White	UL 94V-0
3	Latch	STAINLESS STEEL	—	Ni Plated
2	TERMINAL	COPPER ALLOY	—	Gold Plated
1	SHELL	STAINLESS STEEL	—	Ni Plated
NO.	DISCRIPTION	MATERIAL	COLOR	REMARK

APPROVALS		DATE	ELECTRONICS CO.,LTD	
DRAWN	D.J.L/V	2017/12/26	Hirose®	
CHECKED			USB CONNECTOR	
APPROVALS			PART NO.	TYPE-C-31-G-06
TOLERANCES ARE		±0.30	SCALE:	1:1
	10~30	±0.20	UNIT:	mm
	5~10	±0.15	DRAWING NO.	
	~5	±0.10	PROJ:	
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.
	A		NEW	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [HRO parts manufacturer](#):

Other Similar products are found below :

[10033527-N3112MLF](#) [17-210561](#) [GMCB05B11124H1EU](#) [17-200931](#) [65-647-8-BK-BU](#) [690-010-295-484](#) [73725-1191BLF](#) [950](#) [E8144-B01021-L](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBB15131](#) [MUSBC111M5](#) [MUSBD11135](#) [217450-1](#) [CA 6 W LD](#) [896-30-004-00-000000](#) [KUSBVX-BS1N-W30](#) [KUSBX-AP-KIT-SCBLK](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W](#) [KUSBX-SMTAS1NBTR](#) [KUSBX-SMTBS1NBTR](#) [30-498-6](#) [SK-60A-2](#) [17-200261](#) [17-210051](#) [1734082-1](#) [FK-37-32SL](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [30-572-3](#) [30-9503](#) [M9177/2-1](#) [MAB 5 S](#) [MIKROE-1451](#) [33UBBR-04SW11R](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [USBFTVSCCG](#) [KUSBX-AS2N-W30](#) [KUSBX-SLAS1N-W](#) [KUSBX-SLAS1N-W30](#) [1-1734084-2](#) [E8110-001-01](#) [MUSBC11135](#) [NK-27-32SL](#)