


Pin NUMBER	SIGNAL NAME
1	V BUS
2	D-
3	D+
4	ID
5	GND
6	MICA_SSTX-
7	MICA_SSTX+
8	GND_DRAIN
9	MICA_SSRX-
10	MICA_SSRX+
Shell	Shield

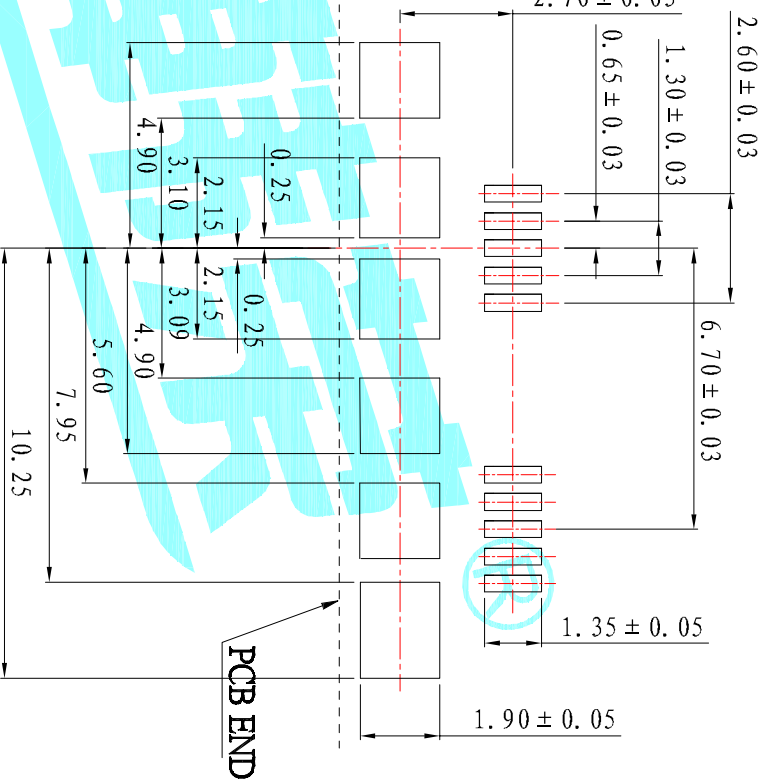

Recommended PCB Layout

- Typical Specifications
1. Rating : 30V 1.5A
 2. Contact Resistance: $\leq 100m\Omega$
 3. Insulation Resistance: $\geq 1000m\Omega$ DC250V
 4. Mating Force: 3.57kg Max
 5. Unmated Force: 1.02kg Min
 6. Life : 10,000 Cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	---	1	SUS304	Ni Plated	
②	Contact	---	10	Copper Alloy	Ag Plated	
①	Housing	---	1	LCP	Black	

APPROVALS	DATE
DRAWN JKUNLU	2014.9.29

CHECKED	TITLE:
	USB CONNECTOR

APPROVALS	PART NO.	SCALE:	PROJ:
	U-F-10SW-Y-1	1:1	

TOLERANCES ARE	UNIT: mm	DRAWING NO.	SHEET 1 OF 1
30° ± 0.30			
10° ± 0.25			
5° ± 0.20			
3° ± 0.15			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			



ELECTRONICS CO., LTD

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [HRO parts manufacturer](#):

Other Similar products are found below :

[950](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#) [1734082-1](#) [30-470](#) [30-489](#) [30-541](#) [MAB 5 S](#) [A-USB A-2P-C](#) [MIKROE-1451](#)
[USBFTVSCCG](#) [1-1734084-2](#) [MUSBA81130](#) [NK-27-32SL](#) [NK-L8-22C-5/8](#) [10135326-001LF](#) [4198](#) [690-024-633-031](#) [UB-20PMFP-LC7001](#)
[17-200011](#) [UB-20AFMM-LL7A01](#) [CAP-WCCMLPB1](#) [CAP-WCCMLPC1](#) [2274475-3](#) [914-614A2025S10200](#) [USB3FTV7SAGF059](#)
[USB3FTV2SAZNF459](#) [USB3FTV7SAZNF459](#) [HYCW153-USBD05-500B](#) [HYCW148-USBD05-117B](#) [HYCW149-USBD05-740B](#)
[HYCW214-USBA04-113B](#) [HYCW213-USBA04-113B](#) [KMMX-BSMT35S-1-B30TR](#) [2345986-1](#) [10082141-N340LF](#) [10117836-011LF](#)
[GSB3C3133DSYHR](#) [GT-USB-2014-CWG1](#) [GT-USB-7010ANS](#)