

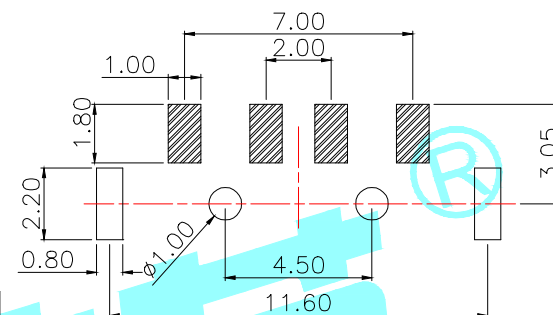
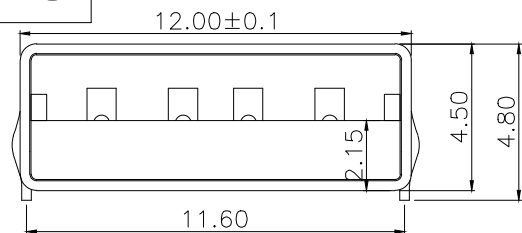


ROHS

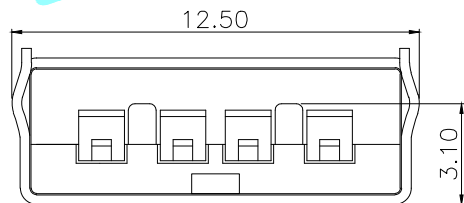

PCB Layout

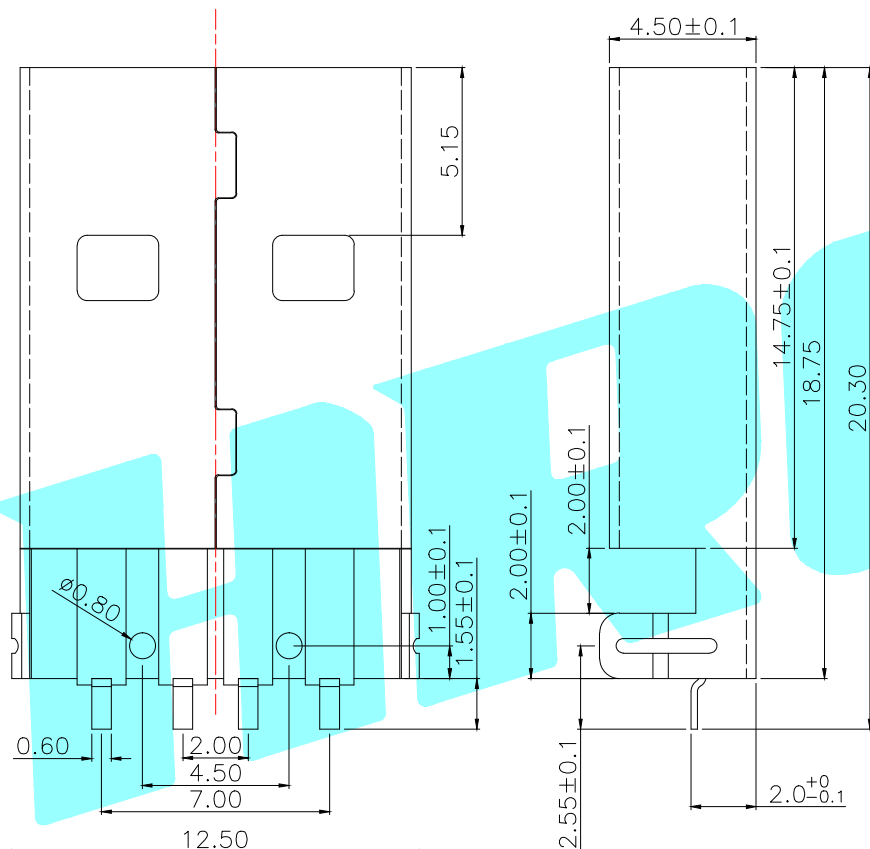

SPECIFICATIONS

1. Rating : DC 30V 1.0A
2. Contact Resistance: $\leq 50m\Omega$
3. Insulation Resistance: $\geq 1000m\Omega$ Min DC250V
4. Operating Temperature Range: $-40^{\circ}C+85^{\circ}C$
5. Manual welding is required: $\leq 350^{\circ}C$
 ≤ 3 seconds

PART NO.	
U-G-04WS-W-01	U-G-04WS-W-02
Housing&Black	Housing&White

③	Shell	—	1	SPCC	Ni Plated	—
②	Contact	—	4	Copper Alloy	Ag Plated	—
①	Housing	—	1	PBT	White/Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		HRO 華榮 ELECTRONICS CO.,LTD	
DRAWN	JKUN.LU		2014/9/29		TITLE:	USB CONNECTOR
CHECKED					PART NO.	U-G-04WS-W-□□
APPROVALS					UNIT: mm	SCALE: 1:1
TOLERANCES ARE		30~以上	±0.30	ANGLE	DRAWING NO.	PROJ:
		10~30	±0.25			
		5~10	±0.20			
		~ 5	±0.15			
			±2'	SHEET 1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [HRO parts manufacturer](#):

Other Similar products are found below :

[950](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBC111M5](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#) [896-30-004-00-000000](#)
[KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#) [1734082-1](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [30-572-3](#) [A-USB](#)
[A-2P-C](#) [MIKROE-1451](#) [USBFTV2PEM2G](#) [USBFTVSCCG](#) [4689-1](#) [1-1734084-2](#) [MUSBC11135](#) [USBF21ZNSCC](#) [USBBFTV6ZC](#)
[MUSBB151341](#) [10135326-001LF](#) [M9177/3-1](#) [TJ-105](#) [USB-A-S-F-B-VT](#) [4198](#) [690-024-633-031](#) [UB-20PMFP-LC7001](#) [USBFTVC6MRG](#)
[UA-20BMFA-SL8001](#) [17-200011](#) [USBFTVC7ZC](#) [UB-20AFMM-LL7A01](#) [USBFTVC2MN](#) [CAP-WCCMLPB1](#) [1310-1031-01](#) [2041386-1](#)
[2274475-3](#) [UB-20BMFA-SL8001](#) [UB-20PMFP-SC8003](#)