


PCB Layout

SPECIFICATIONS
 1. Rating : DC 30V 1.0A
 2. Contact Resistance: ≤50mΩ
 3. Insulation Resistance:
 ≥1000mΩ Min DC250V
 4. Operating Temperature Range:
 -40°C +85°C

PART NO.	U-G-04DD-W-01	U-G-04DD-W-02
Housing & Black	Housing & Black	Housing & White

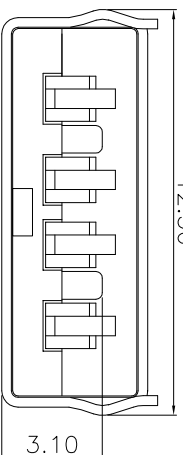

③ Shell	—	1	SPCC	Ni Plated	—	
② Contact	—	4	Copper Alloy	Ag Plated	—	
① Housing	—	1	Nylon	White/Black	—	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				

DRAWN JKUN.LU 2014/9/29
 TITLE: USB CONNECTOR
 ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE		30~Ø以上	±0.30	ANGLE	±2°	DRAWING NO.
		10~30	±0.25	UNIT: mm	SCALE: 1:1	PROJ: ①
		5~10	±0.20			SHEET 1 OF 1
		~5	±0.15			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [HRO parts manufacturer](#):

Other Similar products are found below :

[950](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBC111M5](#) [MUSBD11135](#) [17-200721](#) [217450-1](#) [KMBVX-TH-5S-B30](#)
[896-30-004-00-000000](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [SK-60A-2](#) [1734082-1](#) [30-1574](#) [30-470](#) [30-489](#) [30-](#)
[541](#) [30-572-3](#) [A-USB A-2P-C](#) [MIKROE-1451](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [USBFTVSCCG](#) [4689-1](#) [1-1734084-2](#) [MUSBC11135](#)
[USBF21ZNSCC](#) [USBBFTV6ZC](#) [MUSBB151341](#) [10135326-001LF](#) [M9177/3-1](#) [TJ-105](#) [USB-A-S-F-B-VT](#) [4198](#) [690-024-633-031](#) [UB-](#)
[20PMFP-LC7001](#) [USBFTVC6MRG](#) [UA-20BMFA-SL8001](#) [17-200011](#) [USBFTVC7ZC](#) [UB-20AFMM-LL7A01](#) [USBFTVC2MN](#) [CAP-](#)
[WCCMLPB1](#) [1310-1031-01](#) [2041386-1](#) [2274475-3](#)