

## FEATURES特点

- 5 Amps Small power relay.  
5安培小型功率继电器
- Nominal power 200mW.  
正常功率为200毫瓦。
- Thickness 7mm relay.  
7mm 超薄型继电器
- Approved UL and TUV.  
UL及TUV.安规认证



UL FILE NO.:E171095

CQS FILE NO.: CQC15002133481

## CONTACT RATING 接点参数

Contact Form接点形式	1A SPST-NO
Max. Switching Power最大切换功率	1250VA
Max. Switching Voltage最大切换电压	250VAC
Max. Switching Current最大切换电流	5A
Min. Switching Current/Voltage最小切换电流/电压	100mA 5VDC
Rating Load(Resistive)额定负载(阻性)	5A 250VAC 5A 30VDC 1/8HP 240VAC
Contact Material接点材质	Ag Alloy银合金

## CHARACTERISTICS 性能参数

Electrical Life 电气寿命	1 × 10 <sup>5</sup>	
Mechanical Life机械寿命	1 × 10 <sup>7</sup>	
Insulation Resistance绝缘阻抗	Min. 1,000MΩ 500VDC	
Contact Resistance(Initial)接触电阻	≤ 100mΩ (6VDC 1A)	
Operate Time 动作时间	≤ 20ms	
Release Time 开放时间	≤ 10ms	
Initial Dielectric Strength 耐压	between open contacts开放接点间: 50/60Hz 750VAC 1min. between contacts and coil线圈接点间: 50/60Hz 4000VAC 1min.	
Vibration Resistance 耐振动	Malfuction: 误动作:	10 ~ 55Hz Double Amplitude双振幅 1.5mm
	Damage limits: 耐久:	10 ~ 55Hz Double Amplitude双振幅 1.5mm
Shock Resistance 耐冲击	Malfuction: 误动作:	10G
	Damage limits: 耐久:	100G
Ambient Temperature环境温度	-40℃ ~ +85℃ (No freezing 无结冰)	
Relative Humidity相对湿度	85% at 40℃	
Unit Weight单位重量	约Approx. 4g	

## ORDERING INFORMATION 型号代码说明

Y31-1A-12 D S-F-A 1 2 3 4 5 6 Z	
1. Model Number 型号 2. Contact Arrangement 接点形式 1A= 1 Form A 1组常开 3. Coil Voltage 线圈电压 5、9、12、18、24VDC 4. Coil Type 线圈形式 D=DC 直流 5. Enclosure 密封形式 S = Sealed Type 密封型 H = Washable Type 密封防水型	6. Type of Insulation 绝缘形式 Nil = Class A F = Class F 7. PCB Terminal Structure Nil = Standard type 标准型 A = A type 特殊端子型

## COIL RATINGS (at 20°C) 线圈额定值 (在20°C)

COIL TYPE 线圈形式	Coil Nominal Voltage 线圈额定电压 (V)	Coil Resistance 线圈阻抗 ( $\Omega \pm 10\%$ )	Pick-Up Voltage 动作电压(V) (Max)	Drop-Out Voltage 开放电压(V) (Min)	Nominal Current 额定电流 (mA)
DC Coils 直流线圈 (abt. 0.2W)	5	125	3.75	0.25	40
	9	405	6.75	0.45	22.2
	12	720	9	0.6	16.7
	18	1,620	13.5	0.9	11.1
	24	2,880	18	1.2	8.6

\* Max Continuous Voltage at 20°C: 130% of Coil Normal Voltage.  
 最大使用电压在20°C:线圈额定电压的130%

## OUTLINE DIMENSIONS 外部尺寸


UNIT: mm(inch) 单位: 毫米(英寸)

Dimensions尺寸

Internal Connections接线图  
(Bottom View底视图)


Drilling Plan孔位图  
(Bottom View底视图)

### Standard Type 标准型

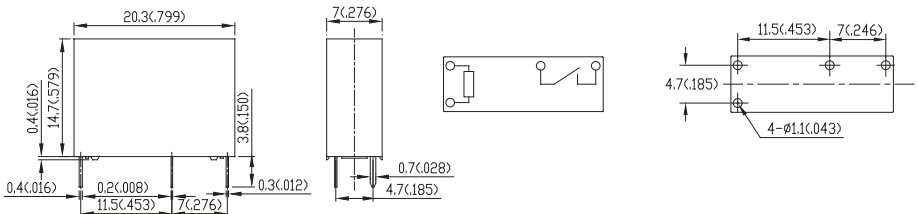




REMARK: Dimensions  $\leq 5\text{mm} \pm 0.2\text{mm}$ ,  $> 5\text{mm} \pm 0.3\text{mm}$ , the tolerance of PCB thru hole:  $+0.2\text{mm}$   
 备注: 尺寸公差  $\leq 5\text{mm} \pm 0.2\text{mm}$ ,  $> 5\text{mm} \pm 0.3\text{mm}$ , 印刷电路板孔 $+0.2\text{mm}$

## A Type 特殊端子型

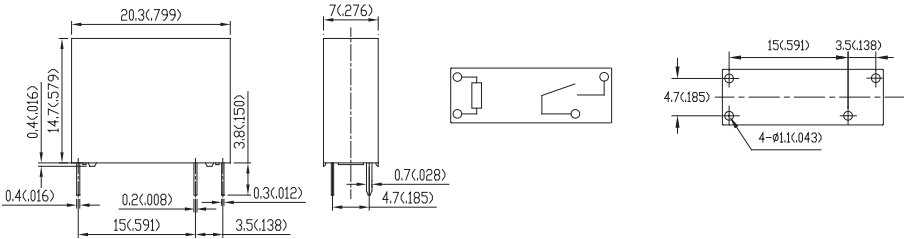

REMARK: Dimensions  $\leq 5\text{mm} \pm 0.2\text{mm}$ ,  $> 5\text{mm} \pm 0.3\text{mm}$ , the tolerance of PCB thru hole:  $+0.2\text{mm}$   
 备注: 尺寸公差  $\leq 5\text{mm} \pm 0.2\text{mm}$ ,  $> 5\text{mm} \pm 0.3\text{mm}$ , 印刷电路板孔 $+0.2\text{mm}$

## Y31 Reference Data 参考资料



## SAFETY STANDARD 安规认证

SAFETY 安规名称	Coil Voltage 线圈电压	Contact Rated 接点额定值
UL	DC : 5V~24V	5A 250VAC 3A 250VAC 5A 30VDC 1/8HP 240VAC
CQC		5A 250VAC 3A 250VAC
TUV		5A 250VAC 3A 250VAC
VDE		5A 250VAC 3A 250VAC

\*CQC、TUV、VDE Application 申请中

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [Hsin Da](#) manufacturer:*

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [5JO-1000CD-SIL](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY2-US-DC24](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [603-12D](#) [60HE1-5DC](#) [60HE2S-12DC](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#)