


# 1A L.D.O VOLTAGE REGULATOR

LM1117GS

## FEATURES

- Output Current up to 1A
- Dropout Voltage is 1.2V at Output current
- Three Terminal Adjustable(ADJ) or Fixed 1.2V, 1.5V, 1.8V, 2.5V, 3.3V, and 5.0V
- Line Regulation typically at 0.1% typ.
- Load Regulation typically at 0.2% typ.
- Internal Current and Thermal Protection
- Surface Mount Package SOT-223-3L
- Moisture Sensitivity Level 3



SOT-223-3L

## APPLICATIONS

- Active SCSI Terminators
- Portable/ Plan Top/ Notebook Computers
- High Efficiency Linear Regulators
- SMPS Post Regulators
- Mother B/D Clock Supplies
- Disk Drives
- Battery Chargers

## ORDERING INFORMATION

Device	Package
LM1117GS-ADJ	SOT-223-3L
LM1117GS-x.x	

x.x: Output Voltage = 1.2V, 1.5V, 1.8V, 2.5V, 3.3V, and 5.0V

## DESCRIPTION

The LM1117GS is a low power positive-voltage regulator designed to meet 1A output current. This device is an excellent choice for use in battery-powered applications, as active terminators for the SCSI bus, and portable computers. The LM1117GS features very low quiescent current and very low dropout voltage of 1.2V at a full load and lower as output current decreases. LM1117GS is available as an adjustable or fixed 1.2V, 1.5V, 1.8V, 2.5V, 3.3V, and 5.0V output voltages. The LM1117GS is offered in a 3-pin surface mount package SOT-223-3L. The output capacitor of 10 $\mu$ F or larger is needed for output stability of LM1117GS as required by most of the other regulator circuits.

## ABSOLUTE MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
Input Supply Voltage	V <sub>IN</sub>	-	20	V
Lead Temperature	T <sub>SOL</sub>	-	260	°C
Storage Temperature Range	T <sub>STG</sub>	-65	150	°C
Operating Junction Temperature Range	T <sub>OPR</sub>	-40	125	°C


# **1A L.D.O VOLTAGE REGULATOR**

**LM1117GS**

## **ORDERING INFORMATION**

V <sub>OUT</sub>	Package	Order No.	Supplied As	Status
ADJ	SOT-223-3L	LM1117GS-ADJ	Tape & Reel	Active
1.2V	SOT-223-3L	LM1117GS-1.2	Tape & Reel	Active
1.5V	SOT-223-3L	LM1117GS-1.5	Tape & Reel	Active
1.8V	SOT-223-3L	LM1117GS-1.8	Tape & Reel	Active
2.5V	SOT-223-3L	LM1117GS-2.5	Tape & Reel	Active
3.3V	SOT-223-3L	LM1117GS-3.3	Tape & Reel	Active
5.0V	SOT-223-3L	LM1117GS-5.0	Tape & Reel	Active

## PIN CONFIGURATION




SOT-223-3L

## PIN DESCRIPTION


Pin No.	Pin Name	Pin Function
1	ADJ / GND	Adjustable or Ground (Fixed Version)
2	VOUT	Output Voltage
3	VIN	Input Voltage

## TYPICAL APPLICATION CIRCUITS

< Fixed Version >

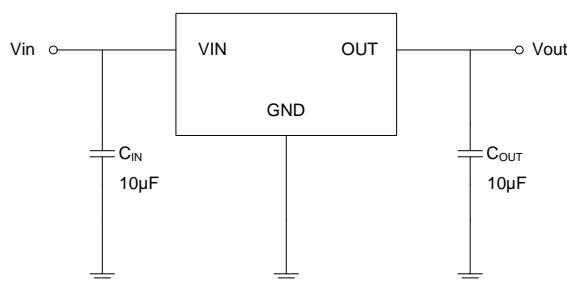

< Adjustable Version >

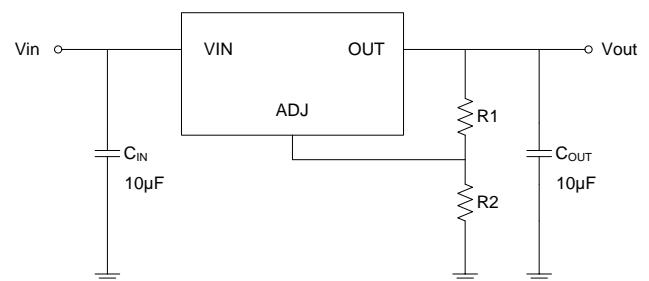

# 1A L.D.O VOLTAGE REGULATOR

LM1117GS

## ELECTRICAL CHARACTERISTICS

### For ADJ Output Voltage

( $T_J=25^\circ\text{C}$ ,  $C_{\text{OUT}} = 10\mu\text{F}$  unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{\text{REF}}$	Reference Voltage	$V_{\text{IN}} = 5\text{V}$ , $I_O = 10\text{mA}$	1.238	1.250	1.262	V
$V_{\text{REF}}$	Reference Voltage	$I_O = 10\text{mA}$ to $1\text{A}$ , $V_{\text{IN}} - V_{\text{REF}} = 1.5\text{V}$ to $13.75\text{V}$ ( $T_J = 0 \sim 125^\circ\text{C}$ )	1.219		1.281	V
$\Delta V_{\text{LINE}}$	Line Regulation	$I_O = 10\text{mA}$ , $V_{\text{IN}} - V_{\text{REF}} = 1.5\text{V}$ to $12\text{V}$		0.1	0.2	%
$\Delta V_{\text{LOAD}}$	Load Regulation	$I_O = 10\text{mA}$ to $1\text{A}$ , $V_{\text{IN}} - V_{\text{REF}} = 2\text{V}$		0.2	0.4	%
$V_{\text{IN}}$	Operating Input Voltage				12	V
$I_{\text{ADJ}}$	Adjustment pin Current	$V_{\text{IN}} - V_{\text{REF}} = 1.5\text{V}$ to $12\text{V}$ , $I_O = 100\text{mA}$		50	120	$\mu\text{A}$
$\Delta I_{\text{ADJ}}$	Adjustment Pin Current Change	$V_{\text{IN}} - V_{\text{REF}} = 1.5\text{V}$ to $12\text{V}$ , $I_O = 100\text{mA}$ to $1\text{A}$		0.5	5	$\mu\text{A}$
$I_{\text{O(MIN)}}$	Minimum Load Current	$V_{\text{IN}} = 5\text{V}$ , $V_{\text{REF}} = 0\text{V}$		5	10	mA
$I_O$	Current Limit	$V_{\text{IN}} - V_{\text{REF}} = 5\text{V}$	1000			mA
$e_N$	Output Noise (% $V_O$ )	$B = 10\text{Hz}$ to $10\text{kHz}$ , $T_J = 25^\circ\text{C}$		0.003		%
SVR	Supply Voltage Rejection	$I_O = 1\text{A}$ , $f = 120\text{Hz}$ , $V_{\text{IN}} - V_{\text{REF}} = 3\text{V}$ , $V_{\text{RIPPLE}} = 1\text{V}_{\text{PP}}$	60	75		dB

### For 1.2V Output Voltage

( $T_J=25^\circ\text{C}$ ,  $C_{\text{OUT}} = 10\mu\text{F}$  unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_O$	Output Voltage	$V_{\text{IN}} = 2.7\text{V}$ , $I_O = 10\text{mA}$	1.176	1.200	1.224	V
$V_O$	Output Voltage	$V_{\text{IN}} = 2.7\text{V}$ to $12\text{V}$ , $I_O = 0\text{mA}$ to $1\text{A}$ ( $T_J = 0 \sim 125^\circ\text{C}$ )	1.152		1.248	V
$\Delta V_{\text{LINE}}$	Line Regulation	$I_O = 10\text{mA}$ , $V_{\text{IN}} = 2.7\text{V}$ to $12\text{V}$		0.1	0.2	%
$\Delta V_{\text{LOAD}}$	Load Regulation	$I_O = 10\text{mA}$ to $1\text{A}$ , $V_{\text{IN}} = 3.2\text{V}$		0.2	0.4	%
$V_{\text{IN}}$	Operating Input Voltage				12	V
$I_D$	Quiescent Current	$V_{\text{IN}} - V_O = 5\text{V}$		5	10	mA
$I_O$	Current Limit	$V_{\text{IN}} - V_O = 5\text{V}$	1000			mA
$e_N$	Output Noise (% $V_O$ )	$B = 10\text{Hz}$ to $10\text{kHz}$ , $T_J = 25^\circ\text{C}$		0.003		%
SVR	Supply Voltage Rejection	$I_O = 1\text{A}$ , $f = 120\text{Hz}$ , $V_{\text{IN}} - V_O = 1.5\text{V}$ , $V_{\text{RIPPLE}} = 1\text{V}_{\text{PP}}$	60	75		dB

# 1A L.D.O VOLTAGE REGULATOR

LM1117GS

## For 1.5V Output Voltage

( $T_J=25^\circ\text{C}$ ,  $C_{\text{OUT}} = 10\mu\text{F}$  unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_O$	Output Voltage	$V_{\text{IN}} = 3.0\text{V}$ , $I_O = 10\text{mA}$	1.485	1.5	1.515	V
$V_O$	Output Voltage	$V_{\text{IN}} = 3.0\text{V to } 12\text{V}$ , $I_O = 0\text{mA to } 1\text{A}$ ( $T_J = 0 \sim 125^\circ\text{C}$ )	1.470		1.530	V
$\Delta V_{\text{LINE}}$	Line Regulation	$I_O = 10\text{mA}$ , $V_{\text{IN}} = 3.0\text{V to } 12\text{V}$		0.1	0.2	%
$\Delta V_{\text{LOAD}}$	Load Regulation	$I_O = 10\text{mA to } 1\text{A}$ , $V_{\text{IN}} = 3.5\text{V}$		0.2	0.4	%
$V_{\text{IN}}$	Operating Input Voltage				12	V
$I_D$	Quiescent Current	$V_{\text{IN}} - V_O = 5\text{V}$		5	10	mA
$I_O$	Current Limit	$V_{\text{IN}} - V_O = 5\text{V}$	1000			mA
$eN$	Output Noise(% $V_O$ )	$B = 10\text{Hz to } 10\text{kHz}$ , $T_J = 25^\circ\text{C}$		100		$\mu\text{V}$
SVR	Supply Voltage Rejection	$I_O = 1\text{A}$ , $f = 120\text{Hz}$ , $V_{\text{IN}} - V_O = 3\text{V}$ , $V_{\text{RIPPLE}} = 1\text{V}_{\text{PP}}$	60	75		dB

## For 1.8V Output Voltage

( $T_J=25^\circ\text{C}$ ,  $C_{\text{OUT}} = 10\mu\text{F}$  unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_O$	Output Voltage	$V_{\text{IN}} = 3.3\text{V}$ , $I_O = 10\text{mA}$	1.782	1.8	1.818	V
$V_O$	Output Voltage	$V_{\text{IN}} = 3.3\text{V to } 12\text{V}$ , $I_O = 0\text{mA to } 1\text{A}$ ( $T_J = 0 \sim 125^\circ\text{C}$ )	1.764		1.836	V
$\Delta V_{\text{LINE}}$	Line Regulation	$I_O = 10\text{mA}$ , $V_{\text{IN}} = 3.3\text{V to } 12\text{V}$		0.1	0.2	%
$\Delta V_{\text{LOAD}}$	Load Regulation	$I_O = 10\text{mA to } 1\text{A}$ , $V_{\text{IN}} = 3.8\text{V}$		0.2	0.4	%
$V_{\text{IN}}$	Operating Input Voltage				12	V
$I_D$	Quiescent Current	$V_{\text{IN}} - V_O = 5\text{V}$		5	10	mA
$I_O$	Current Limit	$V_{\text{IN}} - V_O = 5\text{V}$	1000			mA
$eN$	Output Noise(% $V_O$ )	$B = 10\text{Hz to } 10\text{kHz}$ , $T_J = 25^\circ\text{C}$		100		$\mu\text{V}$
SVR	Supply Voltage Rejection	$I_O = 1\text{A}$ , $f = 120\text{Hz}$ , $V_{\text{IN}} - V_O = 3\text{V}$ , $V_{\text{RIPPLE}} = 1\text{V}_{\text{PP}}$	60	75		dB

# 1A L.D.O VOLTAGE REGULATOR

LM1117GS

## For 2.5V Output Voltage

( $T_J=25^\circ\text{C}$ ,  $C_{\text{OUT}} = 10\mu\text{F}$  unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_O$	Output Voltage	$V_{\text{IN}} = 4.0\text{V}$ , $I_O = 10\text{mA}$	2.475	2.5	2.525	V
$V_O$	Output Voltage	$V_{\text{IN}} = 4.0\text{V}$ to $12\text{V}$ , $I_O = 0\text{mA}$ to $1\text{A}$ ( $T_J = 0 \sim 125^\circ\text{C}$ )	2.450		2.550	V
$\Delta V_{\text{LINE}}$	Line Regulation	$I_O = 10\text{mA}$ , $V_{\text{IN}} = 4.0\text{V}$ to $12\text{V}$		0.1	0.2	%
$\Delta V_{\text{LOAD}}$	Load Regulation	$I_O = 10\text{mA}$ to $1\text{A}$ , $V_{\text{IN}} = 4.5\text{V}$		0.2	0.4	%
$V_{\text{IN}}$	Operating Input Voltage				12	V
$I_D$	Quiescent Current	$V_{\text{IN}} - V_O = 5\text{V}$		5	10	mA
$I_O$	Current Limit	$V_{\text{IN}} - V_O = 5\text{V}$	1000			mA
$eN$	Output Noise(% $V_O$ )	$B = 10\text{Hz}$ to $10\text{kHz}$ , $T_J = 25^\circ\text{C}$		100		$\mu\text{V}$
SVR	Supply Voltage Rejection	$I_O = 1\text{A}$ , $f = 120\text{Hz}$ , $V_{\text{IN}} - V_O = 3\text{V}$ , $V_{\text{RIPPLE}} = 1\text{V}_{\text{PP}}$	60	75		dB

## For 3.3V Output Voltage

( $T_J=25^\circ\text{C}$ ,  $C_{\text{OUT}} = 10\mu\text{F}$  unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_O$	Output Voltage	$V_{\text{IN}} = 4.8\text{V}$ , $I_O = 10\text{mA}$	3.267	3.3	3.333	V
$V_O$	Output Voltage	$V_{\text{IN}} = 4.8\text{V}$ to $12\text{V}$ , $I_O = 0\text{mA}$ to $1\text{A}$ ( $T_J = 0 \sim 125^\circ\text{C}$ )	3.234		3.366	V
$\Delta V_{\text{LINE}}$	Line Regulation	$I_O = 10\text{mA}$ , $V_{\text{IN}} = 4.8\text{V}$ to $12\text{V}$		0.1	0.2	%
$\Delta V_{\text{LOAD}}$	Load Regulation	$I_O = 10\text{mA}$ to $1\text{A}$ , $V_{\text{IN}} = 5.3\text{V}$		0.2	0.4	%
$V_{\text{IN}}$	Operating Input Voltage				12	V
$I_D$	Quiescent Current	$V_{\text{IN}} - V_O = 5\text{V}$		5	10	mA
$I_O$	Current Limit	$V_{\text{IN}} - V_O = 5\text{V}$	1000			mA
$eN$	Output Noise(% $V_O$ )	$B = 10\text{Hz}$ to $10\text{kHz}$ , $T_J = 25^\circ\text{C}$		100		$\mu\text{V}$
SVR	Supply Voltage Rejection	$I_O = 1\text{A}$ , $f = 120\text{Hz}$ , $V_{\text{IN}} - V_O = 3\text{V}$ , $V_{\text{RIPPLE}} = 1\text{V}_{\text{PP}}$	60	75		dB

# 1A L.D.O VOLTAGE REGULATOR

LM1117GS

## For 5.0V Output Voltage

( $T_J=25^\circ\text{C}$ ,  $C_{\text{OUT}} = 10\mu\text{F}$  unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_O$	Output Voltage	$V_{\text{IN}} = 6.5\text{V}$ , $I_O = 10\text{mA}$	4.950	5.0	5.050	V
$V_O$	Output Voltage	$V_{\text{IN}} = 6.5\text{V to } 15\text{V}$ , $I_O = 0\text{mA to } 1\text{A}$ ( $T_J = 0 \sim 125^\circ\text{C}$ )	4.900		5.100	V
$\Delta V_{\text{LINE}}$	Line Regulation	$I_O = 10\text{mA}$ , $V_{\text{IN}} = 6.5\text{V to } 15\text{V}$		0.1	0.2	%
$\Delta V_{\text{LOAD}}$	Load Regulation	$I_O = 10\text{mA to } 1\text{A}$ , $V_{\text{IN}} = 7.0\text{V}$		0.2	0.4	%
$V_{\text{IN}}$	Operating Input Voltage				15	V
$I_D$	Quiescent Current	$V_{\text{IN}} - V_O = 5\text{V}$		5	10	mA
$I_O$	Current Limit	$V_{\text{IN}} - V_O = 5\text{V}$	1000			mA
$eN$	Output Noise(% $V_O$ )	$B = 10\text{Hz to } 10\text{kHz}$ , $T_J = 25^\circ\text{C}$		100		$\mu\text{V}$
SVR	Supply Voltage Rejection	$I_O = 1\text{A}$ , $f = 120\text{Hz}$ , $V_{\text{IN}} - V_O = 3\text{V}$ , $V_{\text{RIPPLE}} = 1\text{V}_{\text{PP}}$	60	75		dB

## For All Output Voltage





( $T_J=25^\circ\text{C}$ ,  $C_{\text{OUT}} = 10\mu\text{F}$  unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_D$	Dropout Voltage	$I_O = 100\text{mA}$		1.0	1.1	V
		$I_O = 500\text{mA}$		1.1	1.2	V
		$I_O = 1\text{A}$		1.2	1.3	V
	Temperature Stability			0.5		%
	Long Term Stability	1000 hrs, $T_J = 125^\circ\text{C}$		0.3		%
	Thermal Regulation	$T_A = 25^\circ\text{C}$ 30ms Pulse		0.003		%/W

# 1A L.D.O VOLTAGE REGULATOR

LM1117GS

## TYPICAL OPERATING CHARACTERISTICS

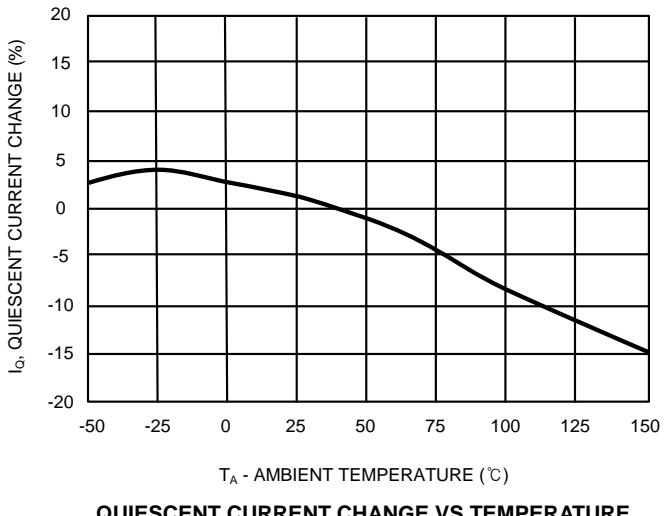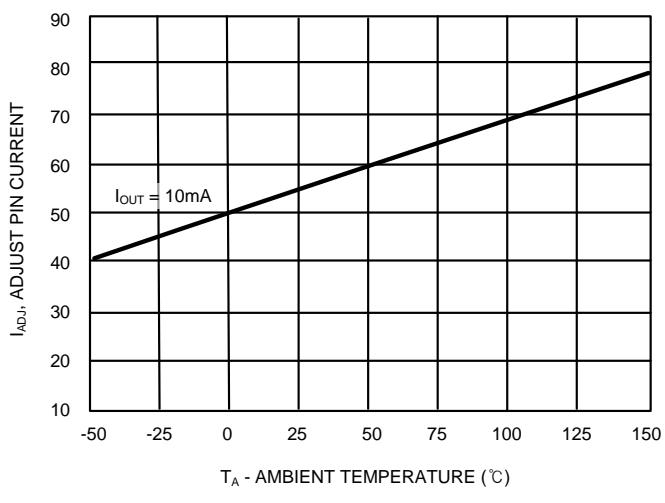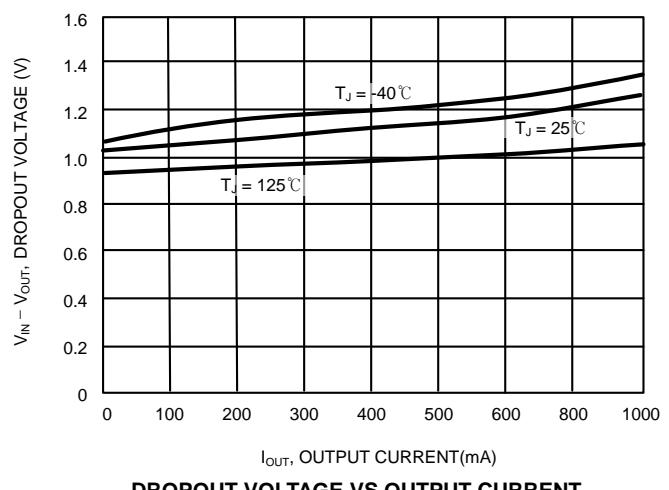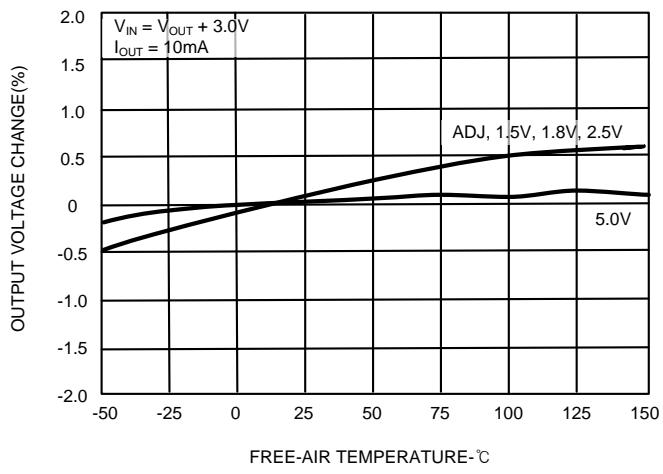

# 1A L.D.O VOLTAGE REGULATOR

LM1117GS

## APPLICATION CIRCUITS

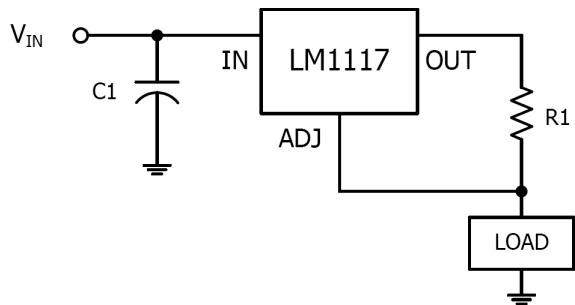


Fig.1 300mA Current Output

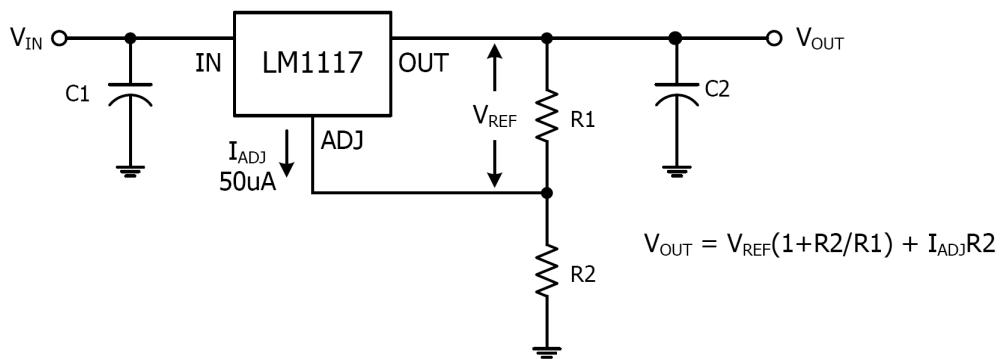


Fig.2 Typical Adjustable Regulator

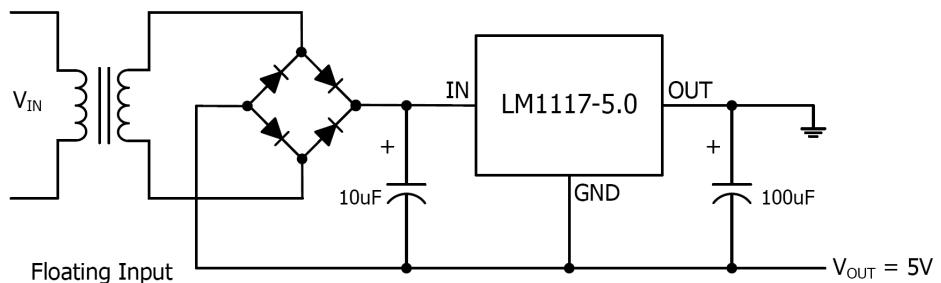


Fig.3 Negative Supply

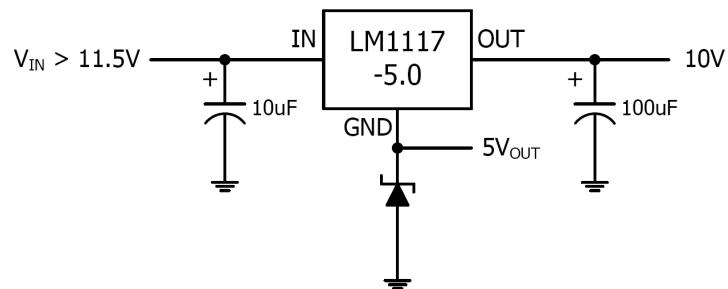


Fig.4 Voltage Regulator with Reference

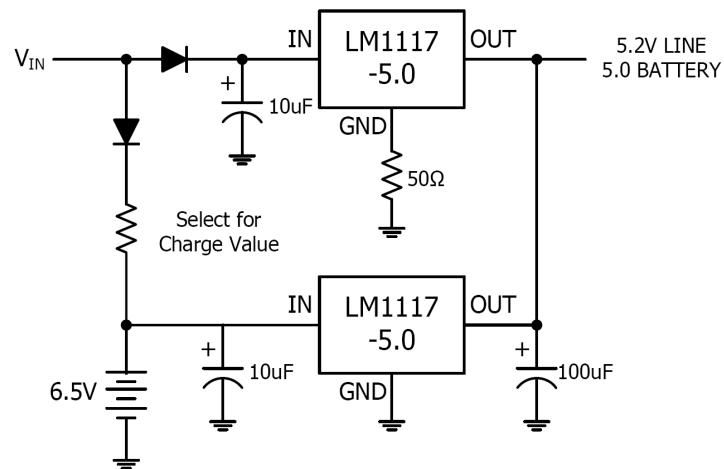


Fig.5 Battery Backed-up Regulated Supply

## APPLICATION INFORMATION

The LM1117GS can deliver a continuous current of 1A over the full operating junction temperature range. However, the output current is limited by the restriction of power dissipation which differs from packages. A heat sink may be required depending on the maximum power dissipation and maximum ambient temperature of application. With respect to the applied package, the maximum output current of 1A may be still undeliverable due to the restriction of the power dissipation of LM1117GS. Under all possible conditions, the junction temperature must be within the range specified under operating conditions. The temperatures over the device are given by:

$$T_C = T_A + P_D \times \theta_{CA} / \quad T_J = T_C + P_D \times \theta_{JC} / \quad T_J = T_A + P_D \times \theta_{JA}$$

where  $T_J$  is the junction temperature,  $T_C$  is the case temperature,  $T_A$  is the ambient temperature,  $P_D$  is the total power dissipation of the device,  $\theta_{CA}$  is the thermal resistance of case-to-ambient,  $\theta_{JC}$  is the thermal resistance of junction-to-case, and  $\theta_{JA}$  is the thermal resistance of junction to ambient. The total power dissipation of the device is given by:

$$\begin{aligned} P_D &= P_{IN} - P_{OUT} = (V_{IN} \times I_{IN}) - (V_{OUT} \times I_{OUT}) \\ &= (V_{IN} \times (I_{OUT} + I_{GND})) - (V_{OUT} \times I_{OUT}) = (V_{IN} - V_{OUT}) \times I_{OUT} + (V_{IN} \times I_{GND}) \end{aligned}$$

where  $I_{GND}$  is the operating ground current of the device which is specified at the Electrical Characteristics. The maximum allowable temperature rise ( $T_{Rmax}$ ) depends on the maximum ambient temperature ( $T_{Amax}$ ) of the application, and the maximum allowable junction temperature ( $T_{Jmax}$ ):

$$T_{Rmax} = T_{Jmax} - T_{Amax}$$

The maximum allowable value for junction-to-ambient thermal resistance,  $\theta_{JA}$ , can be calculated using the formula:

$$\theta_{JA} = T_{Rmax} / P_D = (T_{Jmax} - T_{Amax}) / P_D$$

LM1117GS is available in SOT-223-3L packages. The thermal resistance depends on amount of copper area or heat sink, and on air flow. If the maximum allowable value of  $\theta_{JA}$  calculated above is over 140°C/W for SOT-223-3L package, no heat sink is needed since the package can dissipate enough heat to satisfy these requirements. If the value for allowable  $\theta_{JA}$  falls near or below these limits, a heat sink or proper area of copper plane is required. In summary, the absolute maximum ratings of thermal resistances are as follow:

Characteristic	Symbol	Rating	Unit
Thermal Resistance Junction-To-Ambient / SOT-223-3L	$\theta_{JA}$ -SOT-223	140	°C/W

No heat sink / No air flow / No adjacent heat source /  $T_A=25^\circ\text{C}$

**REVISION NOTICE**

The description in this datasheet is subject to change without any notice to describe its electrical characteristics properly.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for LDO Voltage Regulators category:***

***Click to view products by HTC Korea manufacturer:***

Other Similar products are found below :

[M38D29FFHP#U1](#) [702103A](#) [717726C](#) [742457H](#) [MP20051DN-LF-Z](#) [R5F111PGGFB#30](#) [AP7363-SP-13](#) [NCP103AMX285TCG](#)  
[NCV8664CST33T3G](#) [NCV8752AMX28TCG](#) [L9454](#) [AP7362-HA-7](#) [LX13043CLD](#) [TCR3DF185,LM\(CT\)](#) [TCR3DF24,LM\(CT\)](#)  
[TCR3DF285,LM\(CT\)](#) [TCR3DF31,LM\(CT\)](#) [TCR3DF45,LM\(CT\)](#) [TLF4949EJ](#) [L9708](#) [L970813TR](#) [030014BB](#) [059985X](#) [EAN61387601](#)  
[EAN61573601](#) [NCP121AMX173TCG](#) [NCP4687DH15T1G](#) [NCV8703MX30TCG](#) [701326R](#) [702087BB](#) [755078E](#) [TCR2EN28,LF\(S\)](#)  
[LM1117DT-1.8/NO](#) [LT1086CM#TRPBF](#) [AZ1085S2-1.5TRE1](#) [MAX15101EWL+T](#) [NCV8170AXV250T2G](#) [SCD337BTG](#)  
[TCR3DF27,LM\(CT\)](#) [TCR3DF19,LM\(CT\)](#) [TCR3DF125,LM\(CT\)](#) [TCR2EN18,LF\(S\)](#) [MAX15103EWL+T](#) [TS2937CZ-5.0](#) [C0](#) [MAX8878EUK30-T](#) [MAX663CPA](#) [NCV4269CPD50R2G](#) [NCV8716MT30TBG](#) [AZ1117IH-1.2TRG1](#) [MP2013GQ-P](#)