

3-Terminal 100mA Positive Adjustable Regulator


LM317L

FEATURES

- Output Current Excess of 100mA
- Output Adjustable Between 1.2V and 37V
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limiting
- Output Transistor Safe-Area Compensation
- Moisture Sensitivity Level 3

DESCRIPTION


This monolithic integrated circuit is an adjustable 3-terminal positive voltage regulator designed to supply more than 100mA of load current with an output voltage adjustable over a 1.2 to 37V. It employs internal current limiting, thermal shut-down and safe area compensation.

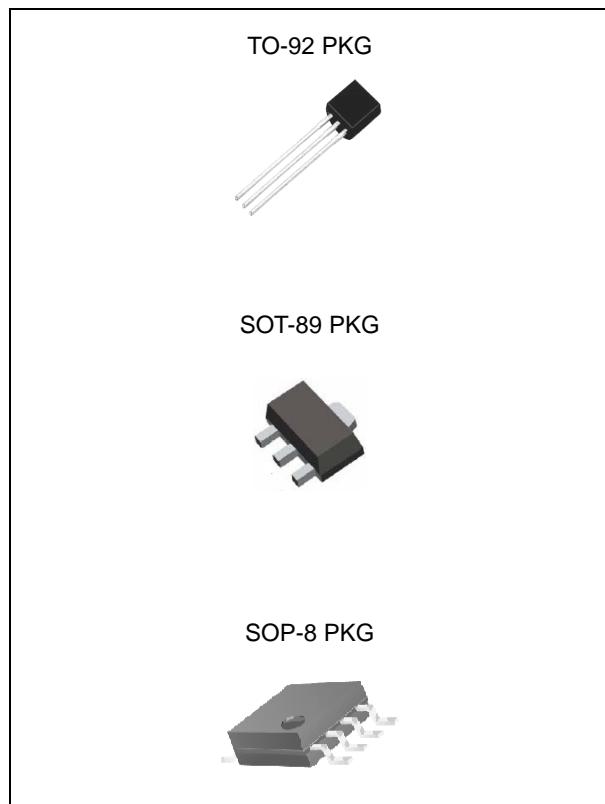

ORDERING INFORMATION

Device	Package
LM317L	TO-92 (Bulk)
LM317LTA	TO-92 (Tape)
LM317LF	SOT-89
LM317LD	SOP-8

BLOCK DIAGRAM

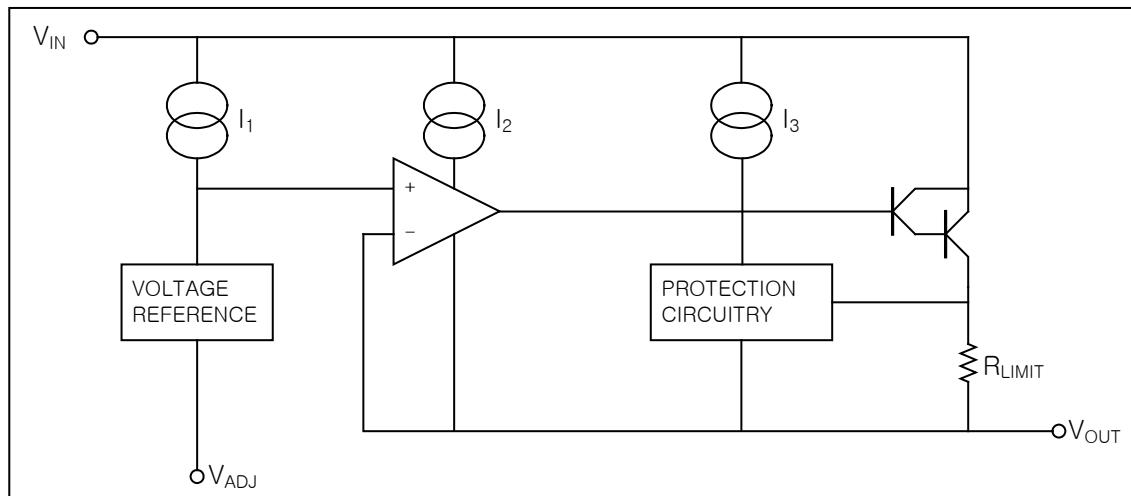

3-Terminal 100mA Positive Adjustable Regulator

LM317L

ABSOLUTE MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	Value	UNIT
Input-output Voltage Differential	$V_I - V_O$	40	V
Lead Temperature (Soldering, 10 sec)	T_{SOL}	230	°C
Power Dissipation	P_D	Internally limited	-
Operating Junction Temperature Range	T_{JOPR}	-40 ~ 125	°C
Storage Temperature Range	T_{STG}	-65 ~ 125	°C

RECOMMENDED OPERATING RATINGS ($V_I - V_O = 5V$, $I_O = 40mA$, $-40°C \leq T_J \leq 125°C$, unless otherwise specified)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	Unit
Line Regulation	$\triangle V_o$	$T_A = -40 \sim 125^\circ C$	$3V \leq V_I - V_O \leq 40V$		0.01	0.04
			$3V \leq V_I - V_O \leq 40V$		0.02	0.07
Load Regulation	$\triangle V_o$	$T_A = 25^\circ C$, $10mA \leq I_o \leq I_{MAX}$	$V_o \leq 5V$		10	25
			$V_o \geq 5V$		0.1	0.5
			$10mA \leq I_o \leq I_{MAX}$		20	80
		$10mA \leq I_o \leq I_{MAX}$	$V_o \leq 5V$		0.3	1.7
			$V_o \geq 5V$			
			$10mA \leq I_o \leq I_{MAX}$			
Adjustable Pin Current	I_{ADJ}			46	100	μA
Adjustable Pin Current Change	$\triangle I_{ADJ}$	$3V \leq V_I - V_O \leq 40V$ $10mA \leq I_o \leq I_{MAX}$ $P \leq P_{MAX}$		0.2	5	μA
Reference Voltage	V_{REF}	$3V \leq V_{IN} - V_{OUT} \leq 40V$ $10mA \leq I_o \leq I_{MAX}$ $P_D \leq P_{MAX}$	1.20	1.25	1.30	V
Temperature Stability	ST_T			0.7		%/ V_o
Minimum Load Current to Maintain Regulation	$L_{(MIN)}$	$V_I - V_o = 40V$		3.5	10	mA
Maximum Output Current	$I_{O(MAX)}$	$V_I - V_o \leq 5V$, $P_D \leq P_{MAX}$ $V_I - V_o \leq 40V$, $P_D \leq P_{MAX}$, $T_A = 25^\circ C$	100 0.156	200 0.4		mA
RMS Noise, % of VOUT	e_N	$T_A = 25^\circ C$, $10Hz \leq f \leq 10KHz$		0.003	0.01	%/ V_o
Ripple Rejection	RR	$V_o = 10V$, $f = 120Hz$ without C_{ADJ} $C_{ADJ} = 10\mu F$	66	60 75		dB
Long-Term Stability, $T_J = T_{HIGH}$	ST	$TA = 25^\circ C$, for end point measurements, 1000HR		0.3	1	%


* Load and line regulation are specified at constant junction temperature. Change in V_D due to heating effects must be taken into account separately. Pulse testing with low duty is used.

3-Terminal 100mA Positive Adjustable Regulator

LM317L

ORDERING INFORMATION


PACKAGE	ORDER NO.	DESCRIPTION	SUPPLIED AS	STATUS
TO-92	LM317L	100mA, Adjustable, Positive	Bulk	Active
TO-92	LM317LTA	100mA, Adjustable, Positive	Tape	Contact us
SOT-89	LM317LF	100mA, Adjustable, Positive	Reel	Active
SOP-8	LM317LD	100mA, Adjustable, Positive	Reel	Active

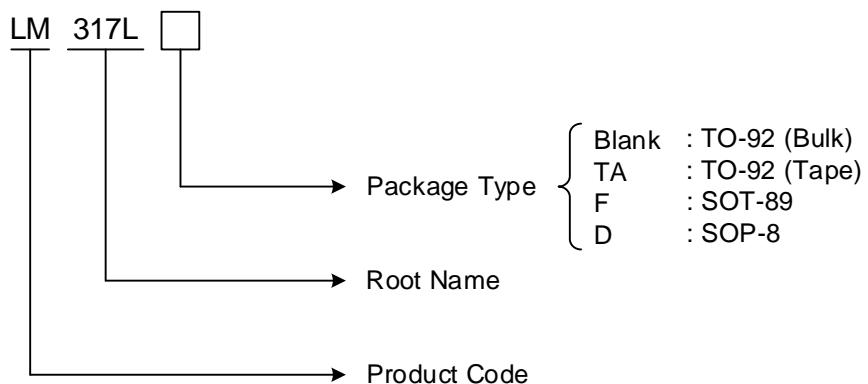


3-Terminal 100mA Positive Adjustable Regulator

LM317L


PIN CONFIGURATION

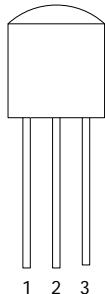

TO-92



SOT-89

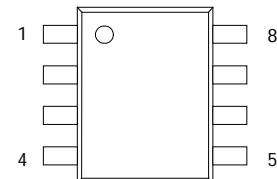

SOP-8


PIN DESCRIPTION

PIN NO.	TO-92 / SOT-89 3 LEAD		SOP-8 8LEAD	
	NAME	FUNCTION	NAME	FUNCTION
1	ADJ	Adjustable	V _{IN}	Input Voltage
2	V _{OUT}	Output Voltage	V _{OUT}	Output Voltage
3	V _{IN}	Input Voltage	V _{OUT}	Output Voltage
4	-	-	ADJ	Adjustable
5	-	-	-	N.C.
6	-	-	V _{OUT}	Output Voltage
7	-	-	V _{OUT}	Output Voltage
8	-	-	-	N.C.

3-Terminal 100mA Positive Adjustable Regulator

LM317L

TYPICAL APPLICATION

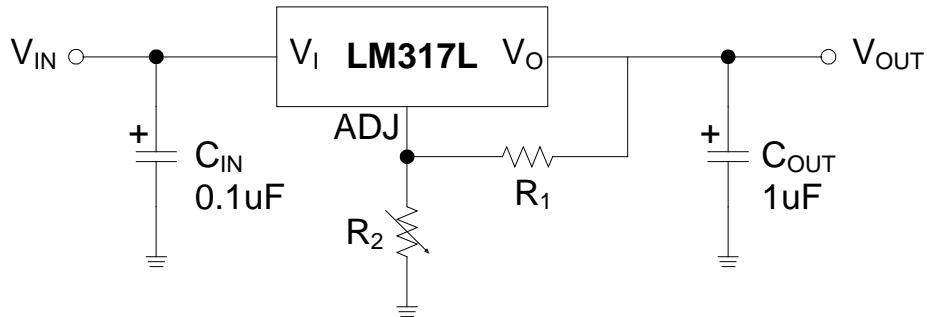

$$V_{OUT} = 1.25V(1+R_2/R_1) + I_{ADJ}R_2$$

Note 1. C_{IN} is required when regulator is located in appreciable distance from power supply filter.

Note 2. C_{OUT} is not needed for stability, however, it does improve transient response.

Note 3. I_{ADJ} is controlled to less than 100uA, the error associated with this term is negligible in most applications.

REVISION NOTICE

The description in this data sheet can be revised without any notice to describe its electrical characteristics properly.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [HTC Korea manufacturer](#):

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#) [714954EB](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L78M15CV-DG](#) [TLS202B1MBV33HTSA1](#) [L79M05T-E](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [MIC5281-3.3YMM](#) [RT9078-28GQZ](#) [MC78L06BP-AP](#) [TA48LS05F\(TE85L,F\)](#) [TC47BR5003ECT](#) [TCR2LN12,LF\(S](#) [TCR2LN28,LF\(S](#) [TCR2LN30,LF\(S](#) [TCR3DF295,LM\(CT](#) [TCR3DF40,LM\(CT](#) [BA178M20CP-E2](#) [L78M12ABDT](#) [LR645N3-G-P003](#) [LR645N3-G-P013](#) [ZXTR2005P5-13](#) [SCD7812BTG](#) [TCR3DF335,LM\(CT](#) [TLE42994E V33](#) [ZXTR2008K-13](#) [ZXTR2005K-13](#) [L88R05DL-E](#) [ADP3300ARTZ-2.7RL7](#) [LM120K-15/883](#) [IFX54441LDVXUMA1](#) [LM317D2T-TR](#) [LM350T/NOPB](#)