

FEATURES

- Internally frequency compensated for unity gain
- Large DC voltage gain : 100dB
- Wide power supply range : 3V~32V(or±1.5V~16V)
- Input common-mode voltage range includes ground
- Large output voltage swing : 0V DC to VCC-1.5V DC
- Power drain suitable for battery operation
- Moisture Sensitivity Level 3
- LM358G is Halogen Free product

**ORDERING INFORMATION**

Device	Package
LM358D	SOP-8
LM358GD	

DESCRIPTION

The LM358D consists of two independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.

Application areas include transducer amplifiers, DC gain blocks and all the conventional op amp circuits. Which now can be easily implemented in single power supply systems.

ABSOLUTE MAXIMUM RATING

CHARACTERISTIC	SYMBOL	VALUE	UNIT
Supply Voltage	V_{CC}	±16V or 32V	V
Differential Input Voltage	$V_{I(DIF)}$	±32V	V
Input Voltage	V_I	-0.3V to 32V	V
Output Short Circuit to GND		Continuous	
$V_{CC} \leq V_{TA}=25^{\circ}\text{C}$ (One Amp)			
Operating Temperature Range	T_{OPR}	0 to 70°C	°C
Storage Temperature Range	T_{STG}	-65°C to 150°C	°C

ELECTRICAL CHARACTERISTICS

Electrical characteristics at specified free-air temperature, $V_{CC}=5V$ (unless otherwise noted)


PARAMETER	TEST CONDITIONS*	MIN	TYP	MAX	UNIT	
V_{IO} Input offset voltage	$V_{CC}=5V$ to MAX, $V_{IC}=V_{ICR}$ min, $V_O=1.4V$	25 °C	3	7	mV	
		Full range		9		
αV_{IO} Average temperature coefficient of input offset voltage		Full range	7		$\mu V/^\circ C$	
I_{IO} Input offset current	$V_O=1.4V$	25 °C	2	50	nA	
		Full range		150		
αI_{IO} Average temperature coefficient of input offset current		Full range	10		$pA/^\circ C$	
I_{IB} Input bias current	$V_O=1.4V$	25 °C		-20	-250	nA
		Full range			-500	
V_{ICR} Common-mode input voltage range	$V_{CC}=5V$ to MAX	25 °C	0 to $V_{CC}-1.5$		V	
		Full range	0 to $V_{CC}-2$			
V_{OH} High-level output voltage	$R_L \geq 2k\Omega$	25 °C	$V_{CC}-1.5$		V	
	$V_{CC}=MAX$, $R_L=2k\Omega$	Full range	26			
	$V_{CC}=MAX$, $R_L \geq 10k\Omega$	Full range	27	28		
V_{OL} Low-level output voltage	$R_L \geq 10k\Omega$	Full range		5	20	mV
A_{VD} Large-signal differential voltage amplification	$V_{CC}=15V$ $V_O=1V$ to 11V $R_L \geq 2k\Omega$	25 °C	25	100	V/mV	
		Full range	15			
THD Total harmonic distortion	$F=1kHz$, $A_V=20dB$, $R_L=2k\Omega$, $V_O=2V_{PP}$, $C_L=100pF$	25 °C		0.02	%	
CMRR Common-mode rejection ratio	$V_{CC} = 5 V$ to MAX, $V_{IC} = V_{ICR}$ min	25 °C	65	80	dB	
k_{SVR} Supply voltage rejection ratio ($\Delta V_{CC}/\Delta V_{IO}$)	$V_{CC} = 5 V$ to MAX	25 °C	65	100	dB	
V_{O1}/V_{O2} Crosstalk attenuation	$f=1kHz$ to 20kHz	25 °C		120	dB	
I_O Output current	$V_{CC}=15V$, $V_{ID}=1V$, $V_O=0V$	25 °C	-20	-30	mA	
		Full range	-10			
	$V_{CC}=15V$, $V_{ID}= -1V$, $V_O=15V$	25 °C	10	20		
		Full range	5			
$V_{ID}= -1 V$, $V_O= 200mV$	25 °C	12	30	μA		
I_{OS} Short-circuit output current	V_{CC} at 5V, GND at -5V, $V_O=0$	25 °C		± 40	± 60	mA
I_{CC} Supply current (Two amplifiers)	$V_O=2.5 V$, No load	Full range		0.7	1.2	mA
	$V_{CC} = MAX$, $V_O = 0.5V_{CC}$, No load	Full range		1	2	

Dual Operational Amplifiers

LM358D

* All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified <<MAX>> VCC for testing purpose is 30V. Full range is 0°C to 70°C.


EQUIVALENT CIRCUIT

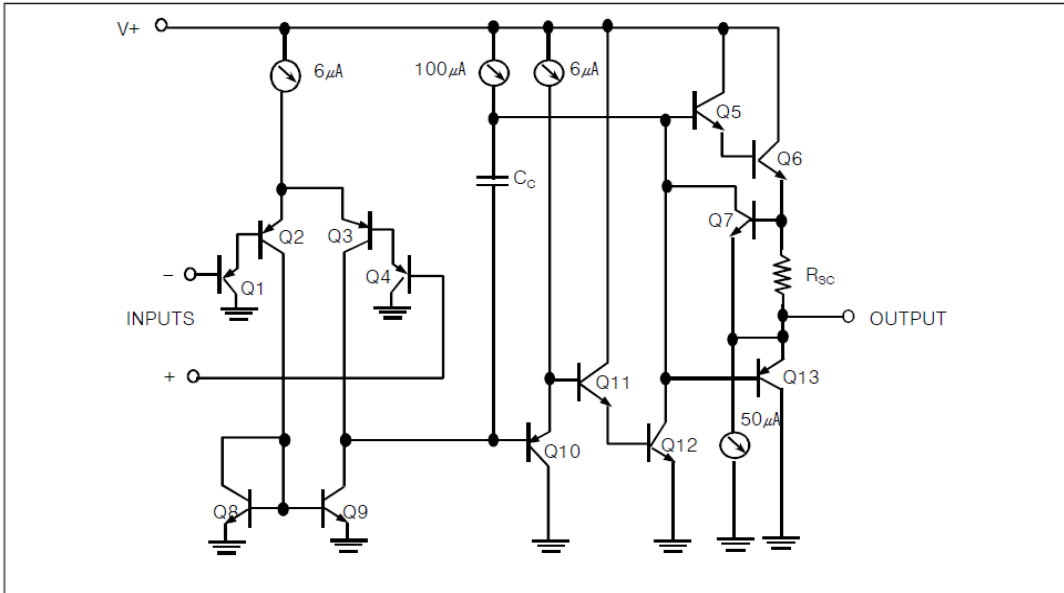

ORDERING INFORMATION


Package	Order No.	Description	Supply As	Status
SOP-8	LM358D	Dual Operational Amplifier, Pb-Free	Reel	Active
SOP-8	LM358GD	Dual Operational Amplifier, Halogen-Free	Reel	Active

PIN CONFIGURATION

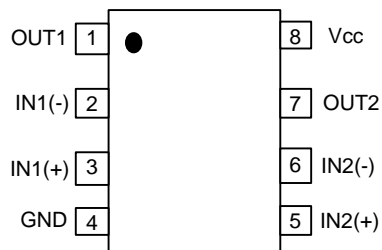


SOP-8


TYPICAL PERFORMANCE CHARACTERISTICS

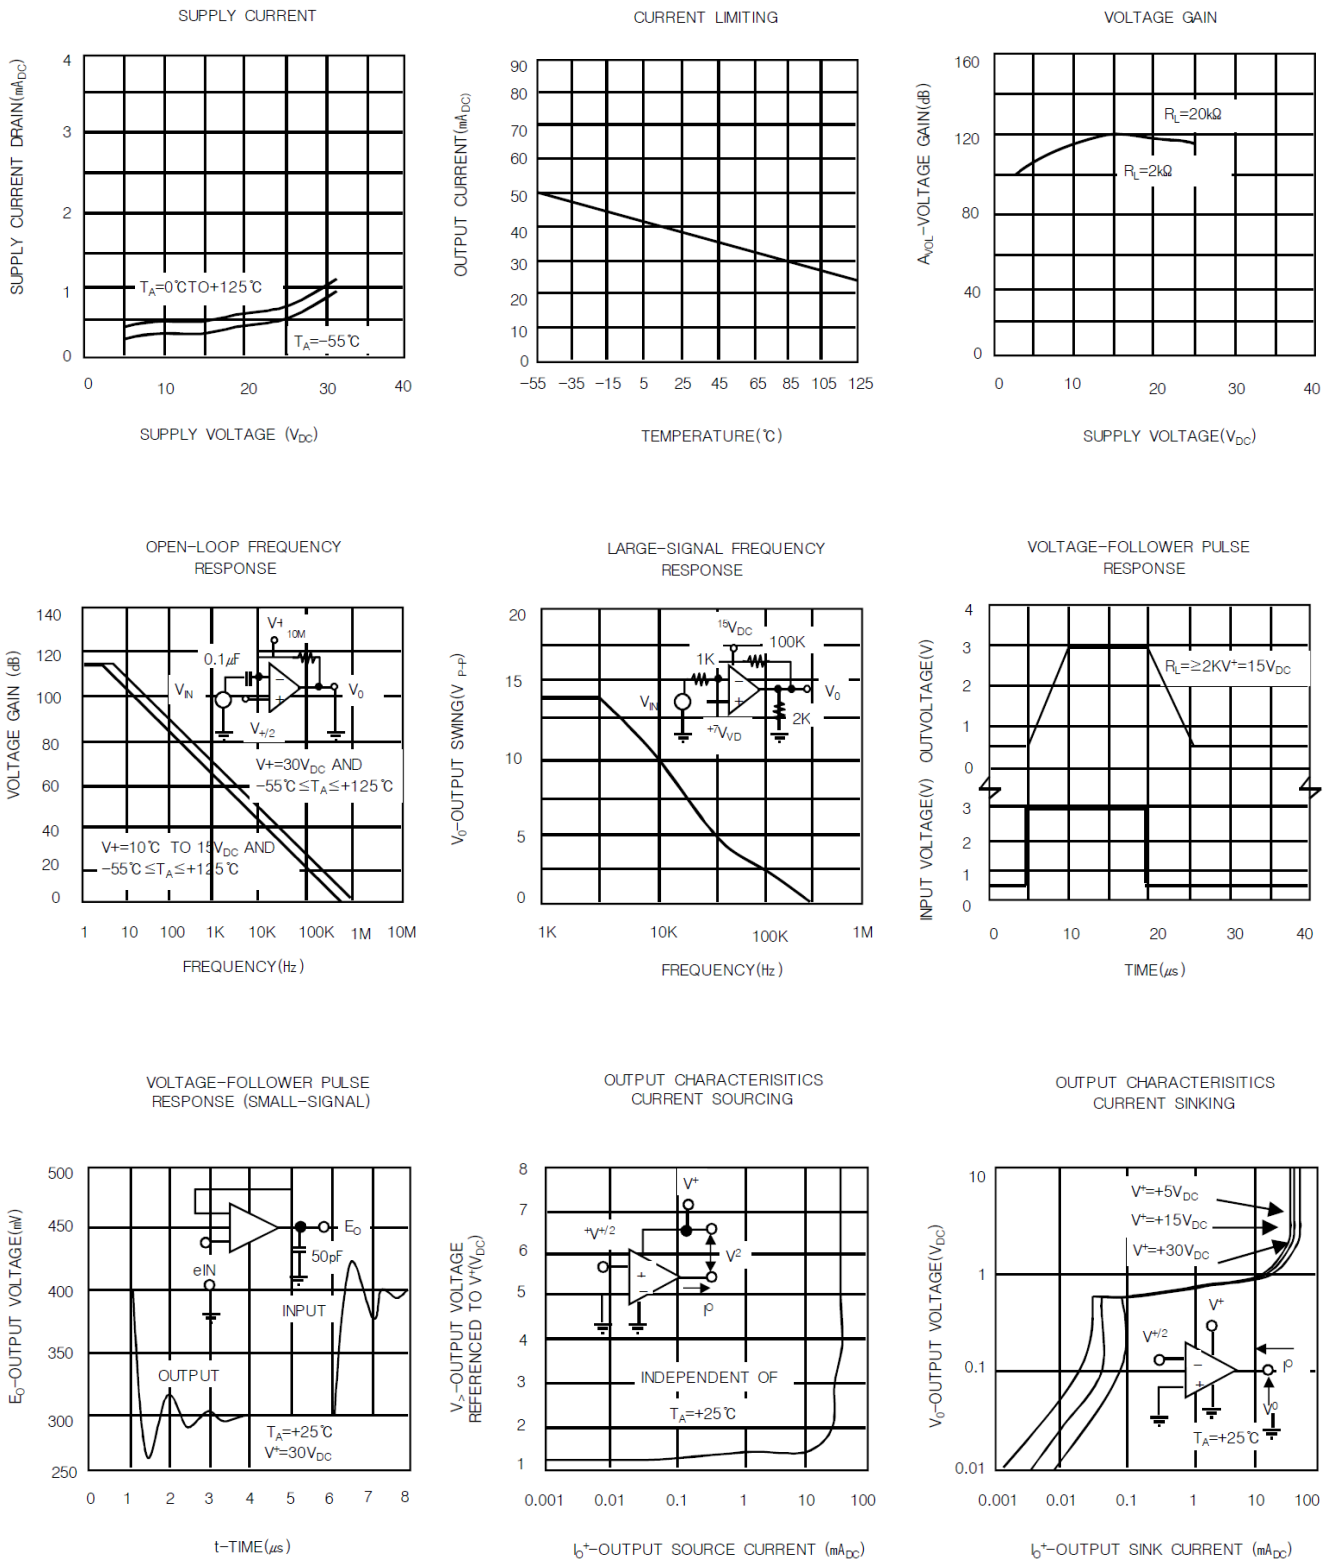


TYPICAL PERFORMANCE CHARACTERISTICS (CONTINUED)

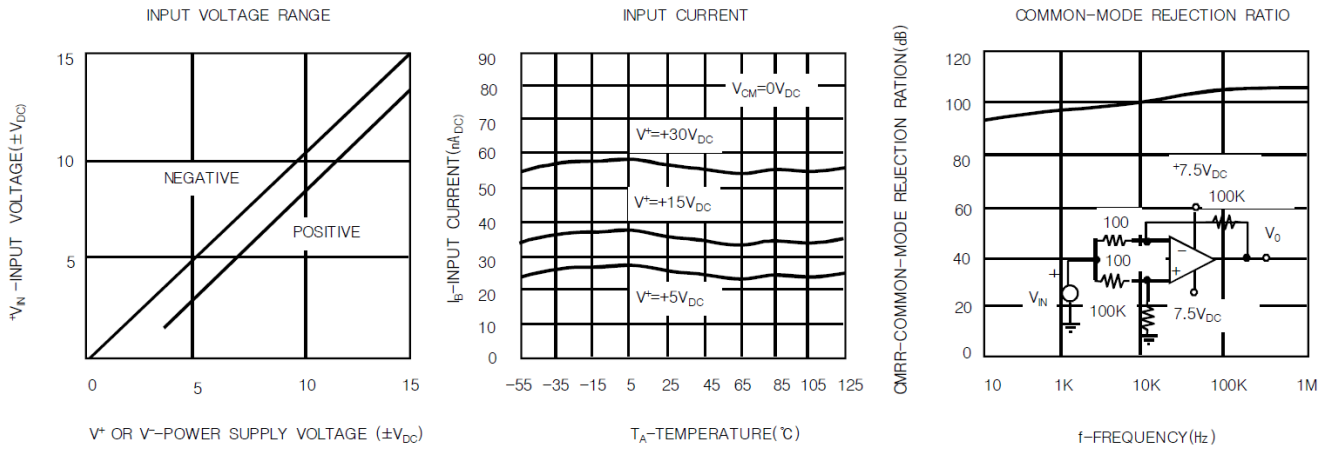


TYPICAL APPLICATIONS

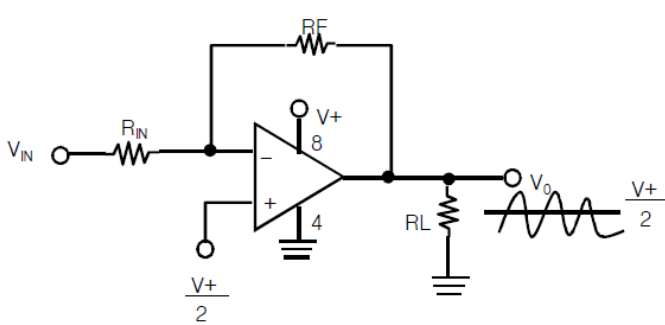

SINGLE SUPPLY INVERTING AMPLIFIER

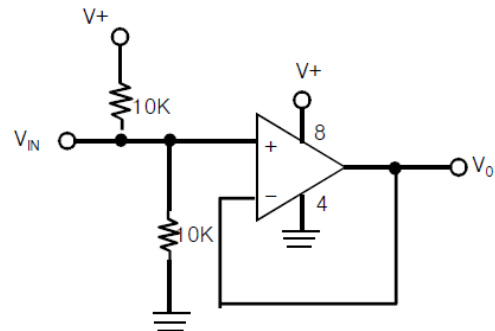

INPUT BIASING VOLTAGE FOLLOWER

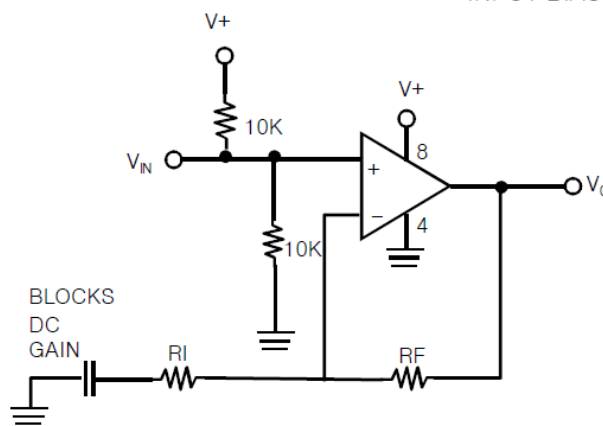

NON-INVERTING AMPLIFIER

REVISION NOTICE

The description in this datasheet can be revised without any notice to describe its electrical characteristics properly.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Operational Amplifiers - Op Amps](#) category:

Click to view products by [HTC Korea](#) manufacturer:

Other Similar products are found below :

[OPA2991IDSGR](#) [OPA607IDCKT](#) [007614D](#) [633773R](#) [635798C](#) [635801A](#) [702115D](#) [709228FB](#) [741528D](#) [NCV33072ADR2G](#)
[SC2902DTBR2G](#) [SC2903DR2G](#) [SC2903VDR2G](#) [LM258AYDT](#) [LM358SNG](#) [430227FB](#) [430228DB](#) [460932C](#) [AZV831KTR-G1](#) [409256CB](#)
[430232AB](#) [LM2904DR2GH](#) [LM358YDT](#) [LT1678IS8](#) [042225DB](#) [058184EB](#) [070530X](#) [SC224DR2G](#) [SC239DR2G](#) [SC2902DG](#)
[SCYA5230DR2G](#) [714228XB](#) [714846BB](#) [873836HB](#) [MIC918YC5-TR](#) [TS912BIYDT](#) [NCS2004MUTAG](#) [NCV33202DMR2G](#)
[M38510/13101BPA](#) [NTE925](#) [SC2904DR2G](#) [SC358DR2G](#) [LM358EDR2G](#) [AZV358MTR-G1](#) [AP4310AUMTR-AG1](#) [HA1630D02MMEL-E](#)
[NJM358CG-TE2](#) [HA1630S01LPEL-E](#) [LM324AWPT](#) [HA1630Q06TELL-E](#)