

PWM Control Circuit

(compatible to TL494)

Description


The HT494A incorporates on a single monolithic chip all the function required in the development of a pulse - width modulation control circuits. Designed primarily for power supply control , the HT494A contains an on-chip 5 volt regulator, two error amplifiers, adjustable oscillator, dead time control comparator, pulse-steering flip-flop, and output control circuitry. The uncommitted output transistors provide either common-emitter or emitter-follower output capability. Push-pull or single-ended output operation may be selected through the output-control function. The architecture of the HT494A prohibits the possibility of either output being pulsed twice during push-pull operation.

Features

- Complete PWM Power Control Circuitry
- Uncommitted Outputs for 200 mA Sink or Source
- Output Control Selects Single-Ended or Push-Pull Operation
- Internal Circuitry Prohibits Double Pulse at Either Output
- Internal Regulator Provides a Stable 5V Reference Supply
- Variable Dead-Time Provides Control Over Whole Range

Function Table

| Output Control | Output Function |
|---------------------|---|
| Grounded | Single-ended or Parallel Output |
| At V _{ref} | Normal Operation Push-Pull Operation |

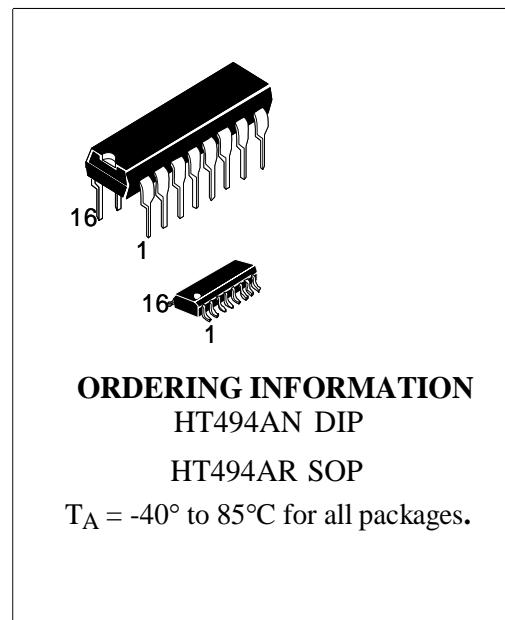


ORDERING INFORMATION


HT494AN DIP

HT494AR SOP

T_A = -40° to 85°C for all packages.

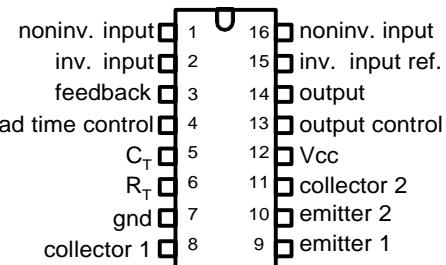

Block Diagram

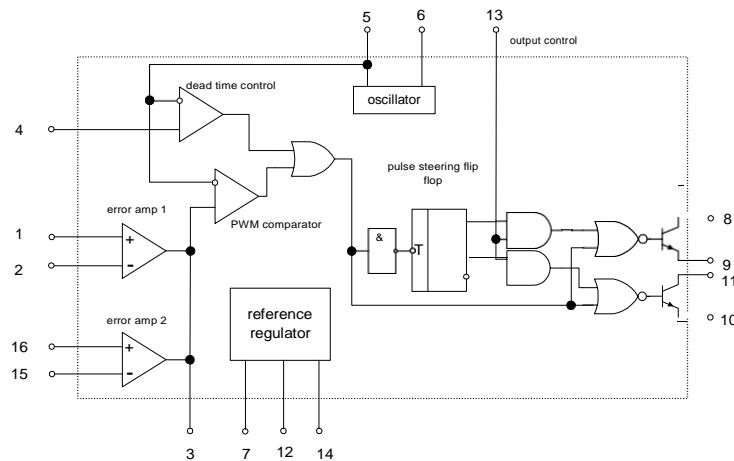

Standard deviation is derived from the formula

$$\sigma = \sqrt{\frac{N}{N-1} \sum_{n=1}^N (X_n - \bar{X})^2}$$

RECOMMENDED OPERATION CONDITIONS

| PARAMETER | MIN | MAX | UNIT |
|---|------|-------|------|
| Supply Voltage | 7 | 40 | V |
| Amplifier Input Voltage | -0.3 | Vcc-2 | V |
| Collector Output Voltage | | 40 | V |
| Collector Output Current (Each Transistor) | | 200 | mA |
| Current Into Feedback Terminal | | 0.3 | mA |
| Timing Capacitor | 0.47 | 10000 | nF |
| Timing Resistor | 1.8 | 500 | kΩ |
| Oscillator Frequency | 1 | 300 | kHz |
| Operating Temperature | -20 | 85 | °C |

ABSOLUTE MAXIMUM RATINGS

| | |
|---|--------------|
| Supply Voltage | 41V |
| Amplifier Input Voltage | Vcc+0.3V |
| Collector Output Voltage | 41V |
| Continuous Total Dissipation at (or below) 25°C | 1000mW |
| Operating Free-Air Temperature Range | -20 to 85°C |
| Storage Temperature Range | -65 to 150°C |
| Collector Output Current | 250mA |

Electrical Characteristics (Temperature -20...85°C, Vcc=15V, f=10kHz)
REFERENCE SECTION

| PARAMETER | TEST CONDITIONS | MIN | MAX | UNIT |
|--|--|------|------|------|
| Output voltage (V_{ref}) | $I_o=1\text{mA}$ | 4.75 | 5.25 | V |
| Input regulation | $Vcc=7\text{V to }40\text{V}, Ta=25^\circ\text{C}$ | | 25 | mV |
| Output regulation | $I_o=1\text{ to }10\text{mA}, Ta=25^\circ\text{C}$ | | 15 | mV |
| Output voltage change with temperature | $Ta=-20^\circ\text{C to }85^\circ\text{C}$ | | 1 | % |
| Short circuit output current | V_{ref} | | 60 | mV |

DEAD TIME CONTROL SECTION

| PARAMETER | TEST CONDITIONS | MIN | MAX | UNIT |
|----------------------------------|---------------------------------|-----|-----|------|
| Input bias current (pin 4) | $Vi=0\text{V to }5.25\text{V}$ | | -10 | μA |
| Maximum duty cycle (each output) | $V_{i(\text{pin 4})}=0\text{V}$ | 45 | | % |
| Input threshold voltage (pin 4) | zero duty cycle | | 3.3 | V |
| | maximum duty cycle | 0 | | V |

ERROR AMPLIFIERS SECTION

| PARAMETER | TEST CONDITIONS | MIN | MAX | UNIT |
|---------------------------------|--|------|-----|------|
| Input offset voltage | $V_{o(\text{pin 3})}=2.5$ | | 10 | mV |
| Input offset current | $V_{o(\text{pin 3})}=2.5$ | | 250 | nA |
| Input bias current | $V_{o(\text{pin 3})}=2.5$ | | 1 | μA |
| Common mode input voltage range | $Vcc=7\text{ to }40\text{V}$ | -0.3 | | V |
| Open loop voltage amplification | $\Delta Vo=3\text{V}, Vo=0.5\text{ to }3.5\text{V}$ | 70 | | dB |
| Unity-gain bandwidth | | 100 | | kHz |
| Common mode rejection ratio | $Vcc=40\text{V}, Ta=25^\circ\text{C}$ | 65 | | dB |
| Output sink current (pin 3) | $V_{ID}=-15\text{mV to }-5\text{V}, V_{o(\text{pin 3})}=0.7\text{V}$ | 0.3 | | mA |
| Output source current (pin 3) | $V_{ID}=15\text{mV to }5\text{V}, V_{o(\text{pin 3})}=3.5\text{V}$ | -2 | | mA |

DISSIPATION RATING TABLE

| PACKAGE | $T_A = 25^\circ\text{C}$ POWER RATING | OPERATING FACTOR | DERATE ABOVE T_A | $T_A=70^\circ\text{C}$ POWER RATING | $T_A=85^\circ\text{C}$ POWER RATING |
|---------|---|------------------------|--------------------|--|--|
| D N | 900 mW 1000 mW | 7.6 mW/°C 9.2 mW/°C | 25°C 41°C | 608 mw 736 mW | 494 mW 598 mW |

PWM COMPARATOR SECTION

| PARAMETER | TEST CONDITIONS | MIN | MAX | UNIT |
|---------------------------------|----------------------|-----|-----|------|
| Input threshold voltage (pin 3) | zero duty cycle | | 4.5 | V |
| Input sink current (pin 3) | $V_{o(pin\ 3)}=0.7V$ | 0.3 | | mA |

SWITCHING CHARACTERISTICS


| PARAMETER | TEST CONDITIONS | MIN | MAX | UNIT |
|--------------------------|------------------|-----|-----|------|
| Output voltage rise time | Common emitter | | 200 | ns |
| Output voltage fall time | configuration | | 100 | ns |
| Output voltage rise time | Emitter-follower | | 200 | ns |
| Output voltage fall time | configuration | | 100 | ns |

OUTPUT SECTION

| PARAMETER | TEST CONDITIONS | MIN | MAX | UNIT |
|------------------------------|---------------------------|-----|------|---------|
| Collector off-state current | $V_{CE}=40V, V_{CC}=40V$ | | 100 | μA |
| Emitter off-state current | $V_{CC}=V_C=40V, V_E=40V$ | | -100 | μA |
| Collector - Emitter | Common emitter | | 1.3 | V |
| saturation voltage | Emitter-follower | | 2.5 | V |
| Output control input current | $V_i=V_{ref}$ | | 3.5 | mA |

OSCILLATOR SECTION

| PARAMETER | TEST CONDITIONS | MIN | MAX | UNIT |
|-----------------------------------|--|-----|-----|------|
| Frequency | $C_T=0.01\mu F, R_T=12k\Omega$ | | 30 | kHz |
| Standard deviation of frequency | All Values of V_{CC}, C_T, R_T, T_a are constant | | 30 | % |
| Frequency change with voltage | $V_{CC}=7V$ to $40V, T_a=25^\circ C$ | | 10 | % |
| Frequency change with temperature | $C_T=0.01\mu F, R_T=12k\Omega,$ | | 2 | |

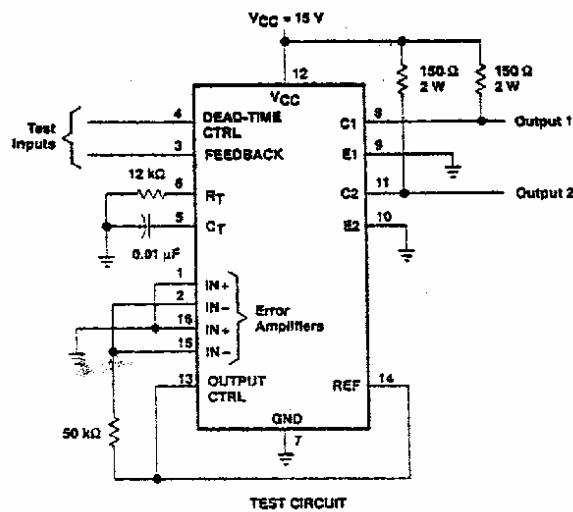PARAMETER MEASUREMENT INFORMATION


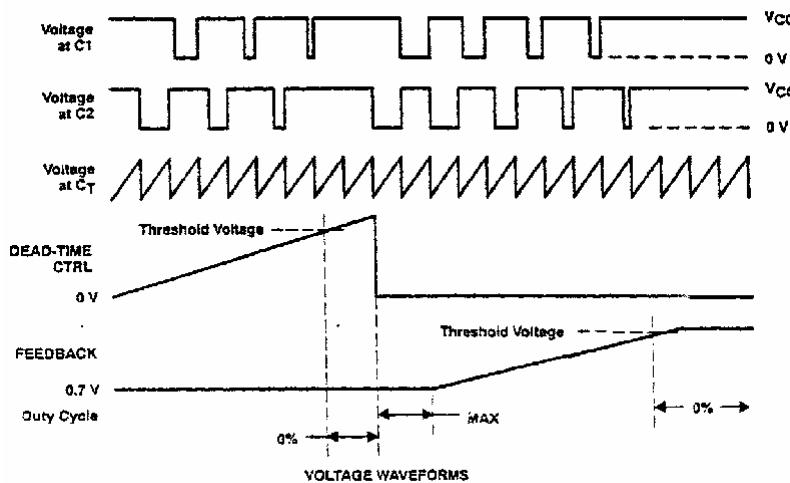
 TEST CIRCUIT


Figure 1. Operational Test Circuit and Waveforms

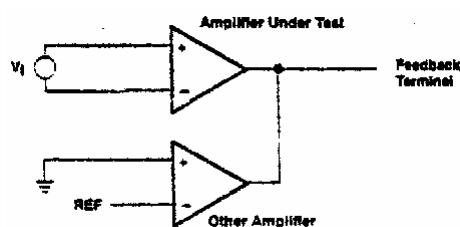


Figure 2. Amplifier Characteristics

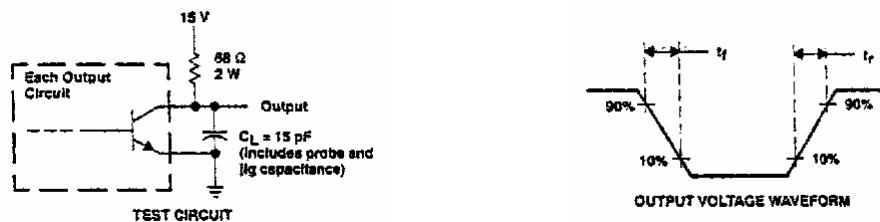


Figure 3. Common-Emitter Configuration

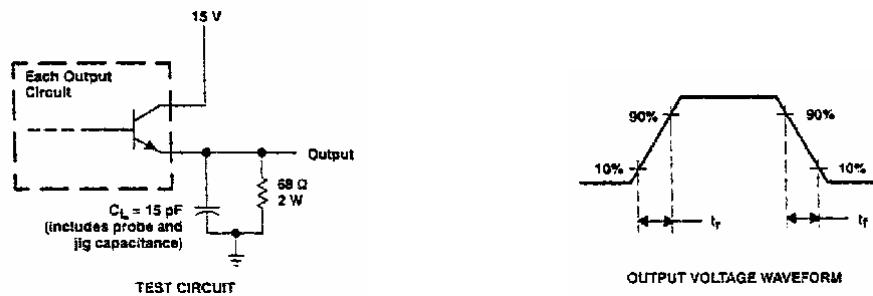


Figure 4. Emitter-Follower Configuration

TYPICAL CHARACTERISTICS
OSCILLATOR FREQUENCY AND FREQUENCY VARIATION
VS
TIMING RESISTANCE

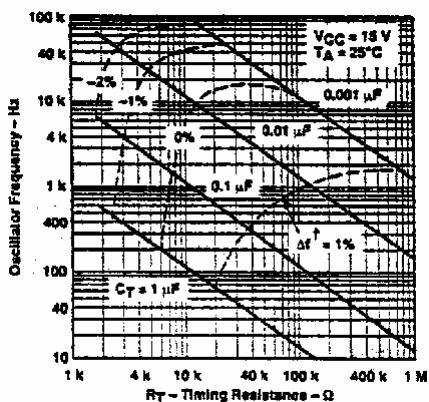


Figure 5

AMPLIFIER VOLTAGE AMPLIFICATION vs FREQUENCY

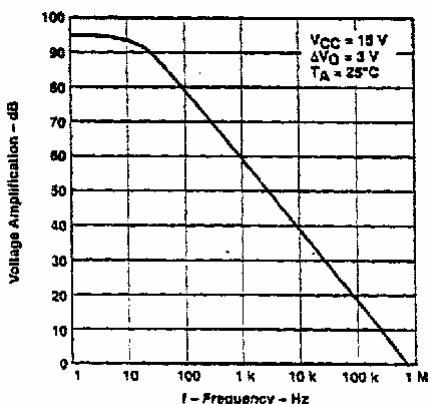


Figure 6

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Voltage Regulators](#) category:

Click to view products by [HTCSEMI manufacturer](#):

Other Similar products are found below :

[FAN53610AUC33X](#) [FAN53611AUC123X](#) [MP2374DS-LF-Z](#) [AP3602AKTR-G1](#) [FAN48610BUC45X](#) [FAN48617UC50X](#) [R3](#) [430464BB](#)
[MPQ4423GQ-AEC1-Z](#) [FAN53611AUC12X](#) [MAX809TTR](#) [NCV891234MW50R2G](#) [AST1S31PUR](#) [NCP81103MNTXG](#)
[NCP81203PMNTXG](#) [NCP81208MNTXG](#) [NCP81109GMNTXG](#) [SCY1751FCCT1G](#) [NCP81109JMNTXG](#) [NCP81241MNTXG](#)
[MP2388GQEU-Z](#) [MPQ4481GU-AEC1-P](#) [MPQ2171GJ-P](#) [IR3888MTRPBFAUMA1](#) [MPQ2171GJ-AEC1-P](#) [MP2171GJ-P](#)
[NCV1077CSTBT3G](#) [MP28160GC-Z](#) [LTM4691EV#PBF](#) [XCL207A123CR-G](#) [XDPE132G5CG000XUMA1](#) [XDPE12284C0000XUMA1](#)
[LTM4691IV#PBF](#) [MP5461GC-P](#) [MIC23356YFT-TR](#) [ISL95338IRTZ](#) [TPS55162QPWPRQ1](#) [MP3416GJ-P](#) [BD9S201NUX-CE2](#)
[ISL9113AIRAZ-T](#) [MP5461GC-Z](#) [MPQ2172GJ-AEC1-Z](#) [MPQ4415AGQB-Z](#) [MPQ4590GS-Z](#) [FAN53526UC224X](#) [S-19903DA-A8T1U7](#) [S-19903CA-A6T8U7](#) [S-19915BA-A8T1U7](#) [S-19903CA-S8T1U7](#) [S-19902BA-A6T8U7](#)