




Silicon N-Channel Power MOSFET ®

CS7N80F A9

General Description:

CS7N80F A9, the silicon N-channel Enhanced VDMOSFETs, is obtained by the self-aligned planar Technology which reduce the conduction loss, improve switching performance and enhance the avalanche energy. The transistor can be used in various power switching circuit for system miniaturization and higher efficiency. The package form is TO-220F, which accords with the RoHS standard.

| | | |
|--|-----|---|
| V _{DSS} | 800 | V |
| I _D | 7 | A |
| P _D (T _C =25 °C) | 48 | W |
| R _{DS(ON)Typ} | 1.5 | Ω |

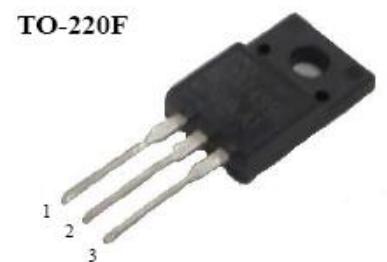

1. Gate 2. Drain 3. Source


Features:

- | Fast Switching
- | Low ON Resistance(R_{dson}≤1.8Ω)
- | Low Gate Charge (Typical Data:34nC)
- | Low Reverse transfer capacitances(Typical:12pF)
- | 100% Single Pulse avalanche energy Test

Applications:

ATX Power、LED Power.

Absolute (T_c = 25 °C unless otherwise specified):

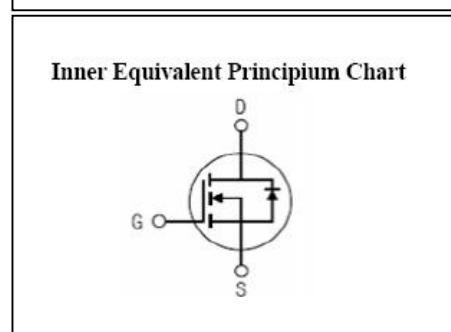

| Symbol | Parameter | Rating | Units |
|-----------------------------------|--|-----------------|-------|
| V _{DSS} | Drain-to-Source Voltage | 800 | V |
| I _D | Continuous Drain Current | 7 | A |
| | Continuous Drain Current T _C = 100 °C | 4 | A |
| I _{DM} ^{a1} | Pulsed Drain Current | 28 | A |
| V _{GS} | Gate-to-Source Voltage | ±30 | V |
| E _{AS} ^{a2} | Single Pulse Avalanche Energy | 150 | mJ |
| E _{AR} ^{a1} | Avalanche Energy ,Repetitive | 20 | mJ |
| I _{AR} ^{a1} | Avalanche Current | 2 | A |
| dv/dt ^{a3} | Peak Diode Recovery dv/dt | 5.0 | V/ns |
| P _D | Power Dissipation | 48 | W |
| | Derating Factor above 25°C | 0.38 | W/°C |
| T _J , T _{stg} | Operating Junction and Storage Temperature Range | 150, -55 to 150 | °C |
| T _L | Maximum Temperature for Soldering | 300 | °C |

**Electrical Characteristics (Tc= 25°C unless otherwise specified):**

| OFF Characteristics | | | | | | |
|-------------------------------------|-----------------------------------|---|--------|------|------|-------|
| Symbol | Parameter | Test Conditions | Rating | | | Units |
| | | | Min. | Typ. | Max. | |
| V _{DSS} | Drain to Source Breakdown Voltage | V _{GS} =0V, I _D =250μA | 800 | -- | -- | V |
| ΔBV _{DSS} /ΔT _J | Bvdss Temperature Coefficient | I _D =250uA, Reference 25°C | -- | 0.6 | -- | V/°C |
| I _{DSS} | Drain to Source Leakage Current | V _{DS} = 800V, V _{GS} = 0V, T _a = 25°C | -- | -- | 25 | μA |
| | | V _{DS} = 640V, V _{GS} = 0V, T _a = 125°C | -- | -- | 250 | |
| I _{GSS(F)} | Gate to Source Forward Leakage | V _{GS} = +30V | -- | -- | 100 | nA |
| I _{GSS(R)} | Gate to Source Reverse Leakage | V _{GS} = -30V | -- | -- | -100 | nA |

| ON Characteristics | | | | | | |
|----------------------------|-------------------------------|--|--------|------|------|-------|
| Symbol | Parameter | Test Conditions | Rating | | | Units |
| | | | Min. | Typ. | Max. | |
| R _{DS(ON)} | Drain-to-Source On-Resistance | V _{GS} =10V, I _D =3.5A | -- | 1.5 | 1.8 | Ω |
| V _{GS(TH)} | Gate Threshold Voltage | V _{DS} = V _{GS} , I _D = 250μA | 2.0 | | 4.0 | V |
| Pulse width tp≤300μs, δ≤2% | | | | | | |

| Dynamic Characteristics | | | | | | |
|--------------------------------|------------------------------|--|--------|------|------|-------|
| Symbol | Parameter | Test Conditions | Rating | | | Units |
| | | | Min. | Typ. | Max. | |
| g _{fs} | Forward Trans conductance | V _{DS} =15V, I _D = 3.5A | -- | 7.5 | -- | S |
| C _{iss} | Input Capacitance | | -- | 1350 | -- | pF |
| C _{oss} | Output Capacitance | V _{GS} = 0V V _{DS} = 25V f = 1.0MHz | -- | 115 | -- | |
| C _{rss} | Reverse Transfer Capacitance | | -- | 12 | -- | |

| Resistive Switching Characteristics | | | | | | |
|--|---------------------------------|--|--------|------|------|-------|
| Symbol | Parameter | Test Conditions | Rating | | | Units |
| | | | Min. | Typ. | Max. | |
| t _{d(ON)} | Turn-on Delay Time | I _D = 7A V _{DD} = 400V V _{GS} = 10V R _G = 12Ω | -- | 15 | -- | ns |
| tr | Rise Time | | -- | 25 | -- | |
| t _{d(OFF)} | Turn-Off Delay Time | | -- | 51 | -- | |
| t _f | Fall Time | | -- | 31 | -- | |
| Q _g | Total Gate Charge | I _D = 7A V _{DD} = 400V V _{GS} = 10V | -- | 34 | -- | nC |
| Q _{gs} | Gate to Source Charge | | -- | 6 | -- | |
| Q _{gd} | Gate to Drain ("Miller") Charge | | -- | 14 | -- | |

**Source-Drain Diode Characteristics**

| Symbol | Parameter | Test Conditions | Rating | | | Units |
|----------------------------|--|--|--------|------|------|-------|
| | | | Min. | Typ. | Max. | |
| I _S | Continuous Source Current (Body Diode) | | -- | -- | 7 | A |
| I _{SM} | Maximum Pulsed Current (Body Diode) | | -- | -- | 28 | A |
| V _{SD} | Diode Forward Voltage | I _S =7A, V _{GS} =0V | -- | -- | 1.5 | V |
| t _{rr} | Reverse Recovery Time | I _S =7A, T _j = 25°C dI _F /dt=100A/us, V _{GS} =0V | -- | 186 | | ns |
| Q _r r | Reverse Recovery Charge | | -- | 878 | | nC |
| Pulse width tp≤300μs, δ≤2% | | | | | | |






| Symbol | Parameter | Typ. | Units |
|------------------|---------------------|------|-------|
| R _{θJC} | Junction-to-Case | 2.6 | °C/W |
| R _{θJA} | Junction-to-Ambient | 100 | °C/W |

^{a1}: Repetitive rating; pulse width limited by maximum junction temperature

^{a2}: L=10.0mH, I_D=5.5A, Start T_j=25°C






^{a3}: I_{SD}=7A,di/dt ≤100A/us,V_{DD}≤BV_{DS}, Start T_j=25°C

Characteristics Curve:

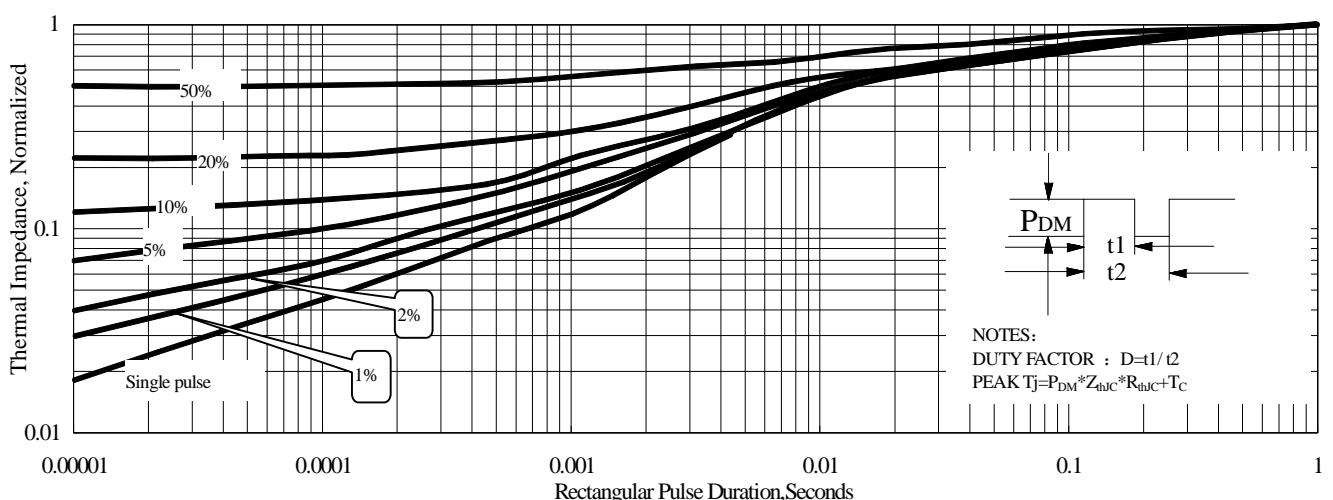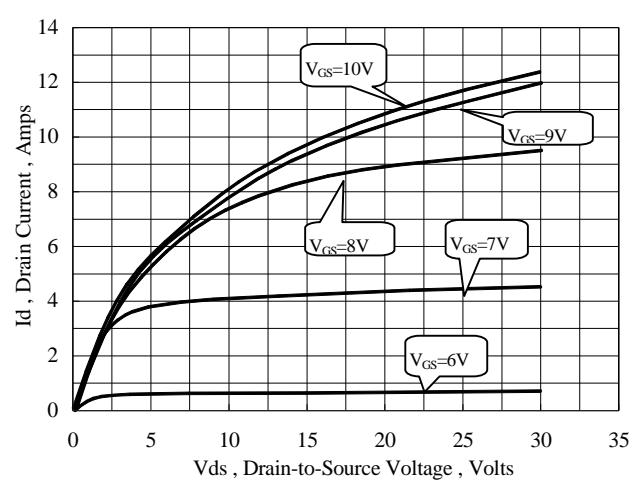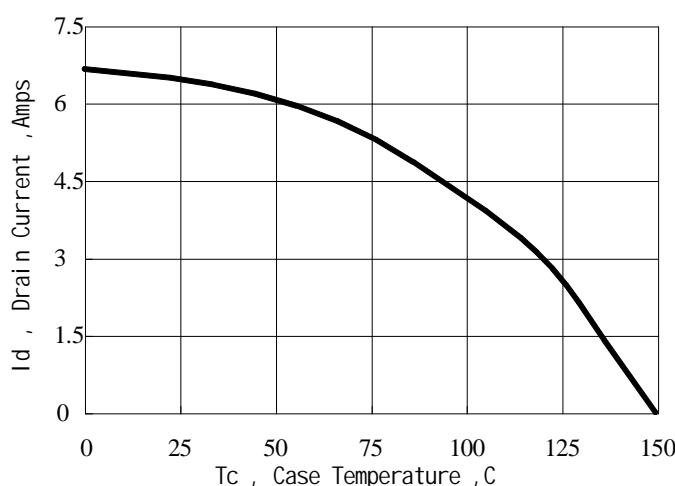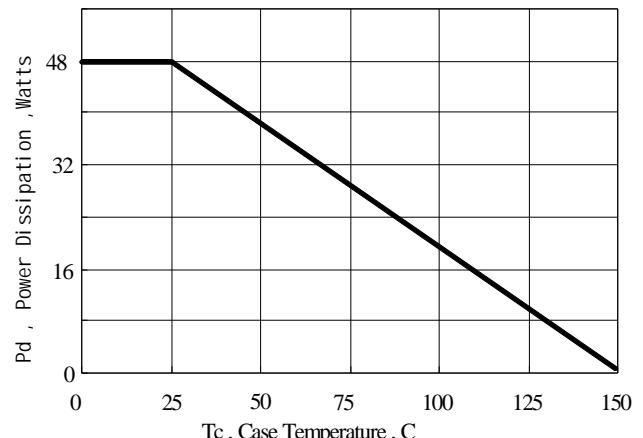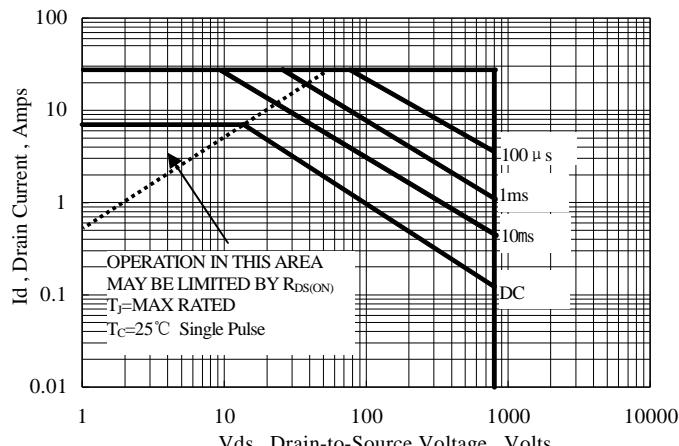



CS7N80FA9

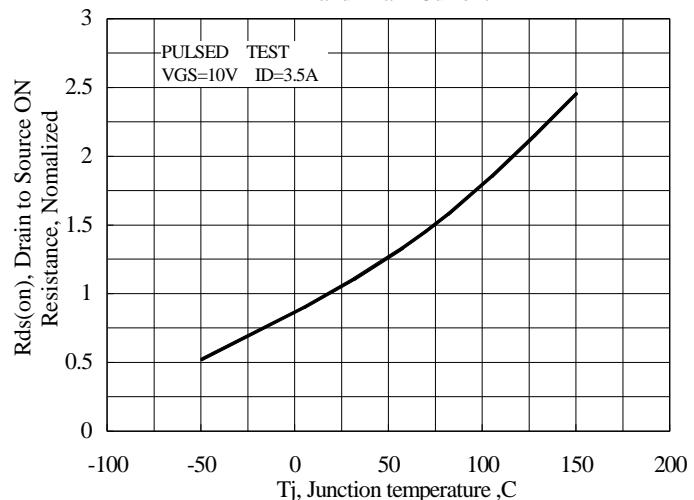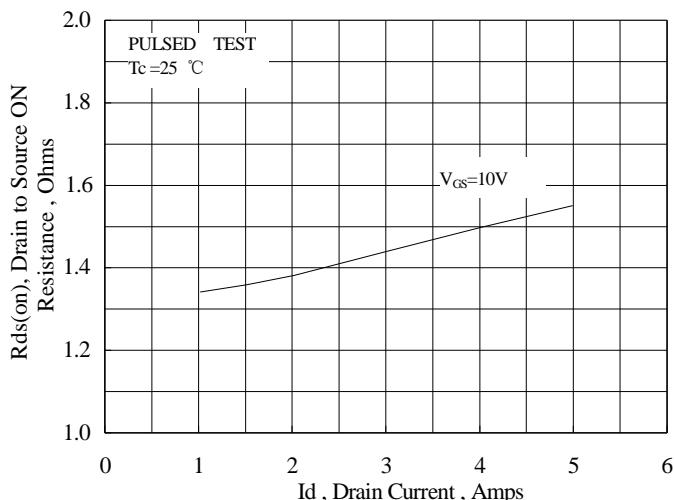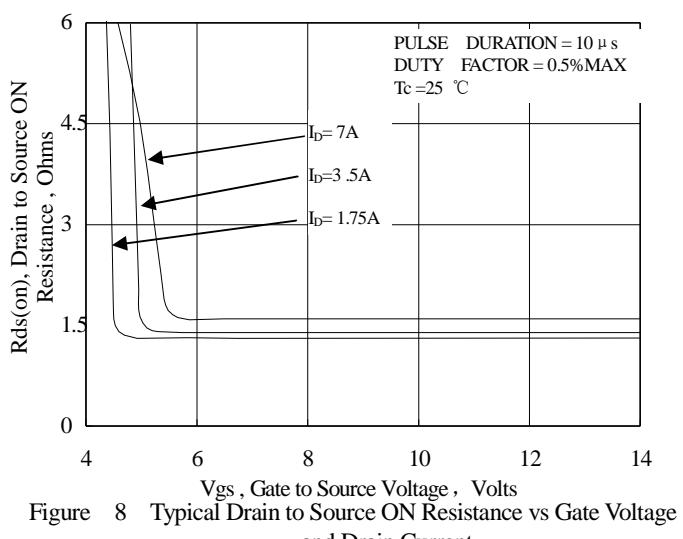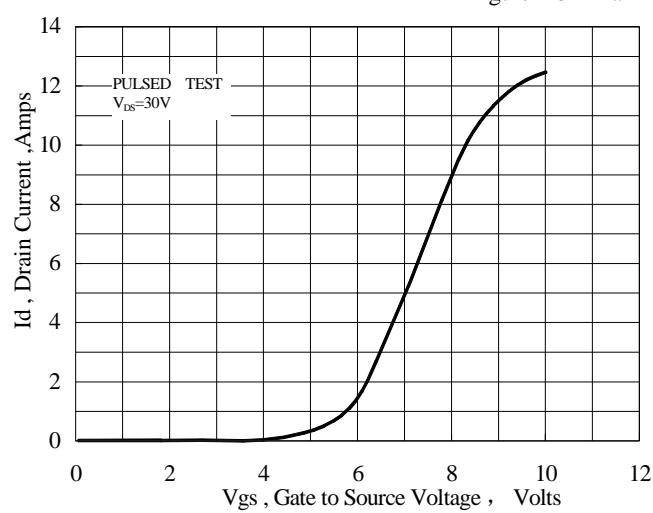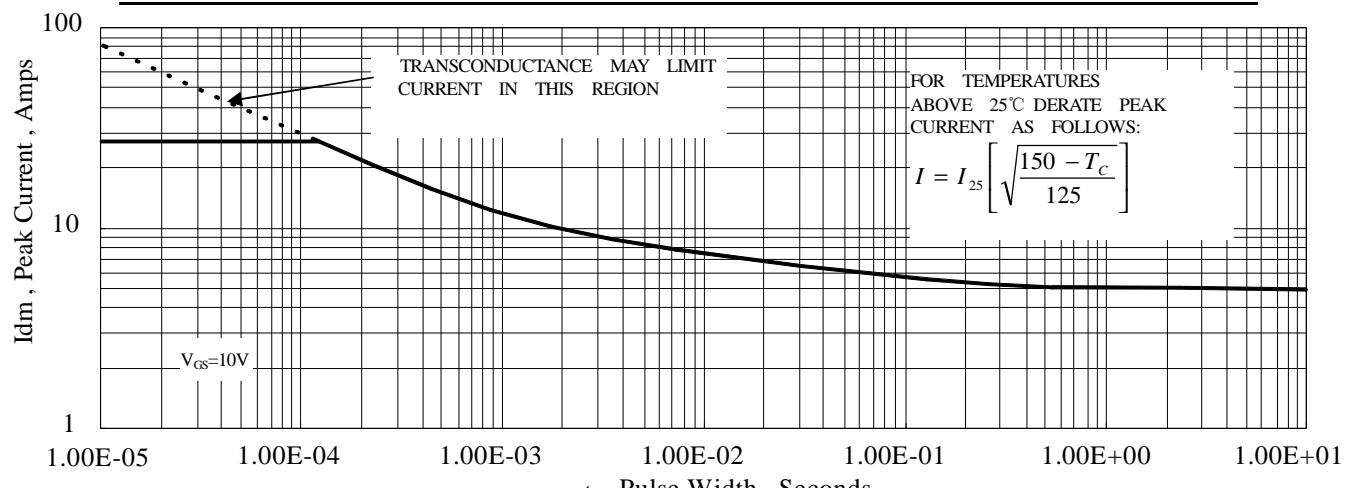



CS7N80FA9

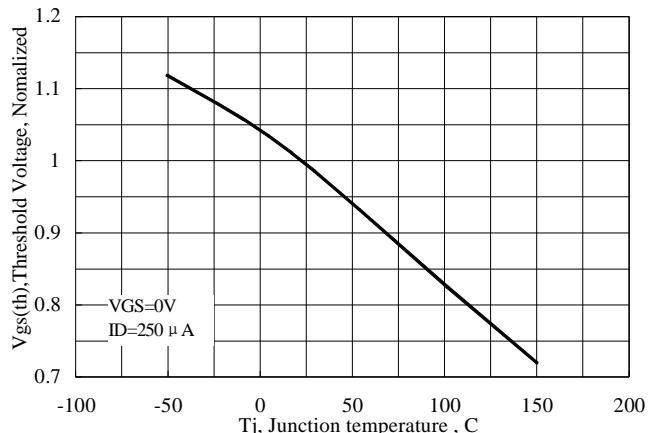


Figure 11 Typical Threshold Voltage vs Junction Temperature

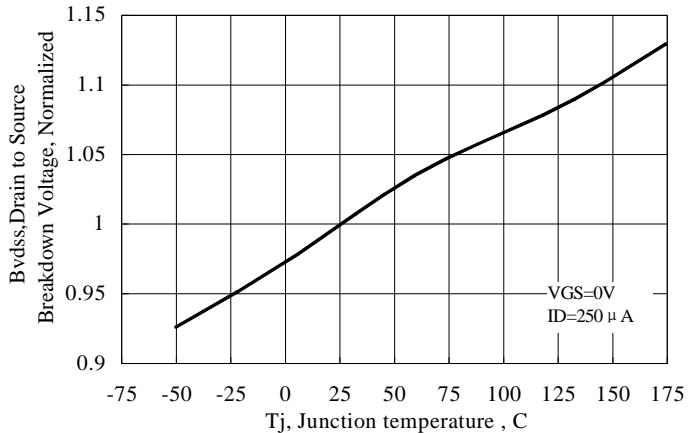


Figure 12 Typical Breakdown Voltage vs Junction Temperature

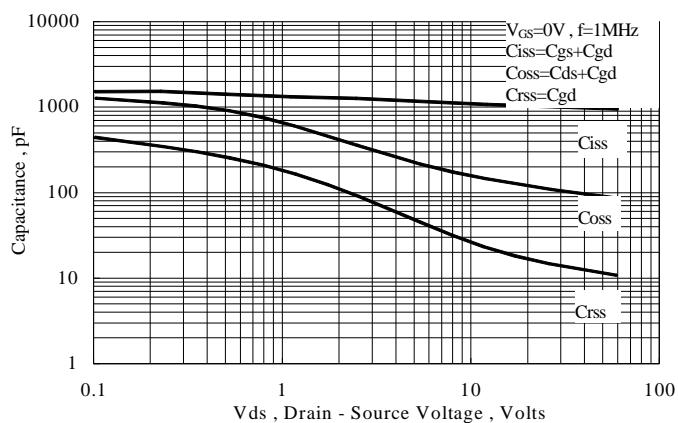


Figure 13 Typical Capacitance vs Drain to Source Voltage

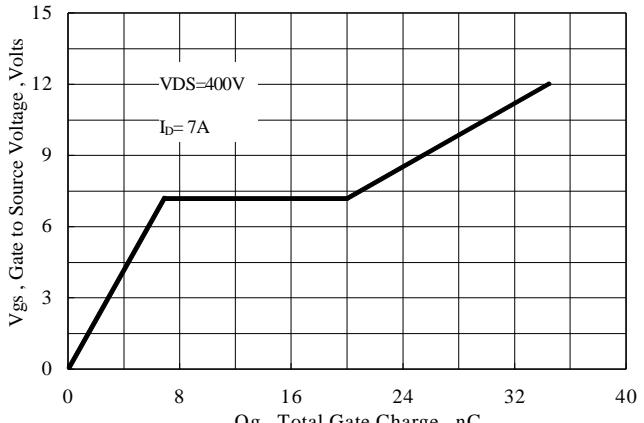


Figure 14 Typical Gate Charge vs Gate to Source Voltage

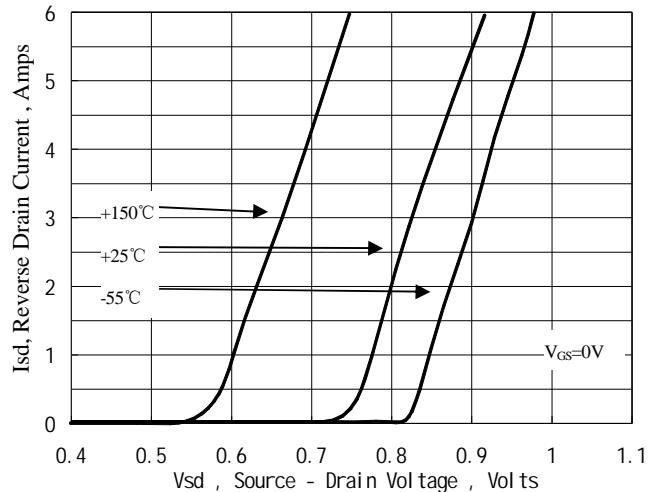


Figure 15 Typical Body Diode Transfer Characteristics

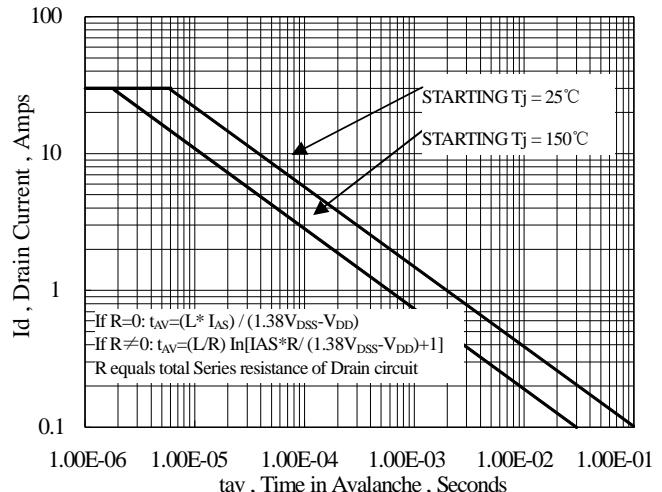


Figure 16 Unclamped Inductive Switching Capability

Test Circuit and Waveform

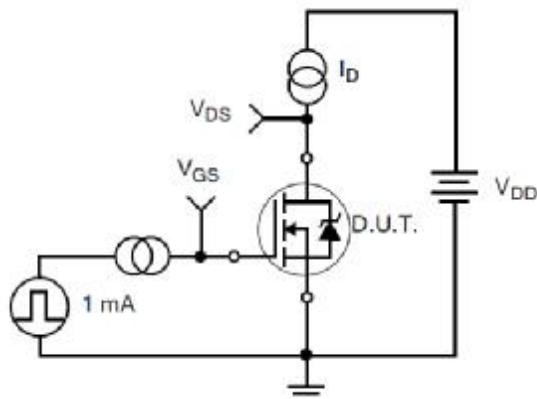


Figure 17. Gate Charge Test Circuit

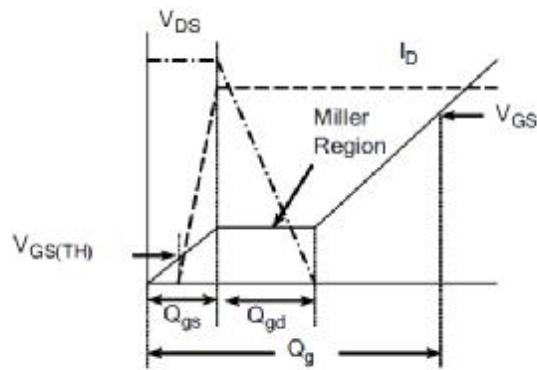


Figure 18. Gate Charge Waveform



Figure 19. Resistive Switching Test Circuit

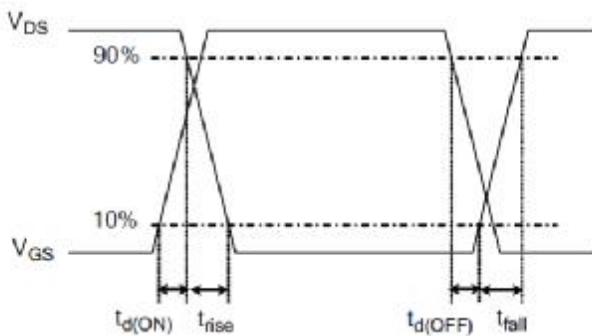


Figure 20. Resistive Switching Waveforms

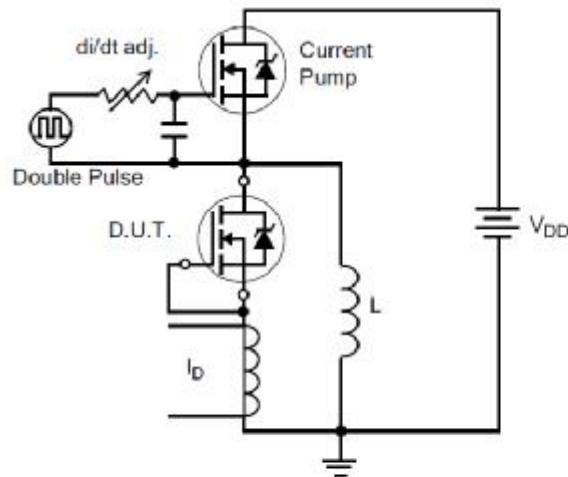


Figure 21. Diode Reverse Recovery Test Circuit



Figure 22. Diode Reverse Recovery Waveform



Figure 23. Unclamped Inductive Switching Test Circuit


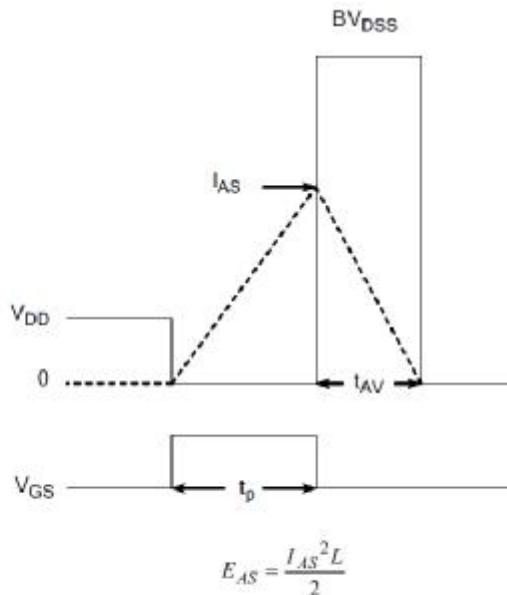


Figure 24. Unclamped Inductive Switching Waveforms



Package Information

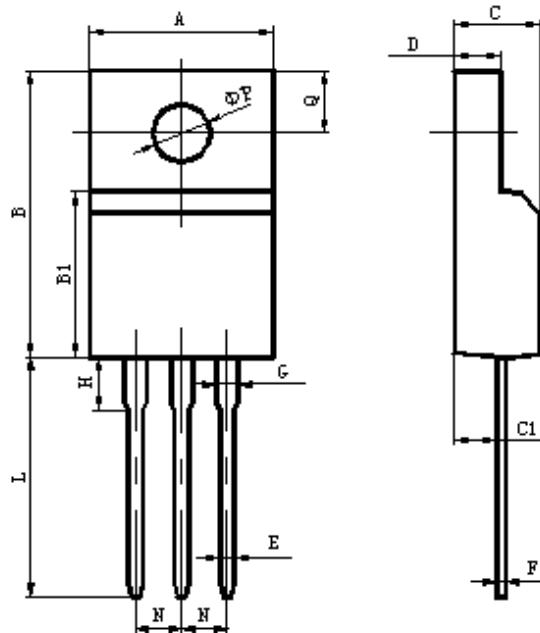

| Items | Values(mm) | |
|-------|------------|-------|
| | MIN | MAX |
| A | 9.60 | 10.40 |
| B | 15.40 | 16.20 |
| B1 | 8.90 | 9.50 |
| C | 4.30 | 4.90 |
| C1 | 2.10 | 3.00 |
| D | 2.40 | 3.00 |
| E | 0.60 | 1.00 |
| F | 0.30 | 0.60 |
| G | 1.12 | 1.42 |
| H | 3.40 | 3.80 |
| | 2.00 | 2.40 |
| L | 12.00 | 14.00 |
| | 6.30 | 7.70 |
| N | 2.34 | 2.74 |
| Q | 3.15 | 3.55 |
| Φ P | 3.00 | 3.30 |

TO-220F Package

**The name and content of poisonous and harmful material in products**

| Part's Name | Hazardous Substance | | | | | |
|------------------|--|-------|--------|--------|-------|-------|
| | Pb | Hg | Cd | Cr(VI) | PBB | PBDE |
| Limit | ≤0.1% | ≤0.1% | ≤0.01% | ≤0.1% | ≤0.1% | ≤0.1% |
| Lead Frame | ○ | ○ | ○ | ○ | ○ | ○ |
| Molding Compound | ○ | ○ | ○ | ○ | ○ | ○ |
| Chip | ○ | ○ | ○ | ○ | ○ | ○ |
| Wire Bonding | ○ | ○ | ○ | ○ | ○ | ○ |
| Solder | × | ○ | ○ | ○ | ○ | ○ |
| Note | <p>○: means the hazardous material is under the criterion of SJ/T11363-2006.</p> <p>×: means the hazardous material exceeds the criterion of SJ/T11363-2006.</p> <p>The plumbum element of solder exist in products presently, but within the allowed range of Eurogroup's RoHS.</p> | | | | | |

Warnings

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. It is suggested to be used under 80 percent of the maximum ratings of the device.
2. When installing the heatsink, please pay attention to the torsional moment and the smoothness of the heatsink.
3. VDMOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. This publication is made by Huajing Microelectronics and subject to regular change without notice.

WUXI CHINA RESOURCES HUAJING MICROELECTRONICS CO., LTD.

Add: No.14 Liangxi RD. Wuxi, Jiangsu, China Mail:214061 <http://www.crhj.com.cn>
Tel: +86 0510-85807228 Fax: +86- 0510-85800864

Marketing Part: Post: 214061 Tel: +86 0510-81805277/81805336
Fax: +86 0510-85800360/85803016
E-mail: sales@hj.crmicro.com

Application and Service: Post: 214061 Tel / Fax: +86- 0510-81805243/81805110

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Huajing manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)