

# 规格书 Specification

品名  
Model name

**HMB1275-05B**  
**C96491**  
**ROHS**

**PROPRIETARY**  
**Huaneng Electronic co.,Ltd.**

**CONFIDENTIAL**  
**Huaneng Electronic co.,Ltd.**

<b>Version #</b>	<b>Spec V1.0</b>
<b>制作日期 Date</b>	<b>2017/05/16</b>
<b>准备 Prepared</b>	<b>Yang shu yin Acoustic specialist,R&amp;D Dept.</b>
<b>审核 Approved</b>	<b>Zhang chang hua Executive Manager,R&amp;D Dept.</b>



## 江苏华能电子有限公司

*Components Operating Div.*  
*HuanengElectronic co.,Ltd.*

1.适用范围：本规范适用于HMB1275-05B ROHS蜂鸣器。

This specifications apply the HMB1275-05B ROHS buzzer.

## 2.基本规格/General specification

项目/Item	规格/Spec	条件/Condition
1 额定电压 Rated voltage	5VDC	
2 工作电压 Operation voltage	4~8VDC	
3 声压 Sound Pressure Level=SPL	Min 85dB	测试环境：标准状态，标准驱动电路， 额定电压 测试距离：0.1m Standard State,Standard Drive Circuit. Rated voltage,Distance at 0.1m
4 平均消费电流 Average consumption current	≤ 30mA	
5 振荡频率 Oscillation frequency	2300±300Hz	
6 响应时间 Response time	Max 50mS	最低工作电压 Lowest operation voltage
7 工作温度范围 Range of operation temperature	-20~+85°C	声压 ≥85dB SPL ≥85dB
8 保存温度范围 Range of preservation temperature	-20~+85°C	
9 端子强度 Terminal strength	10N	拉负荷方向的终端轴 Pull load on the direction of the terminal axis
10 外部尺寸 Externals size	Φ12x7.5	参阅附图 Refer to the attached drawing
11 重量 Mass	2g	

☆标准状态：常温（15~35°C），湿度（25~85%相对湿度），空气压力（860~1060hpa）

在假设的情况判断，测试是一基本状态下进行。

Standard State:Ordinary Temp(15~35°C),Humidity(25~85%RH),Air pressure(860~1060hPa)



In case of doubtful judgment,the test is re—performed under Basic State.



☆基本情况：温度。（20±2°C），湿度（60~70%相对湿度），空气压力（860~1060hpa）

Basic State: Temp.(20±2°C),Humidity(60~70%RH),Air pressure(860~1060hPa)


<标准驱动电路>/<Standard Drive Circuit>

<标准测试治具>/<Standard Test Fixture>

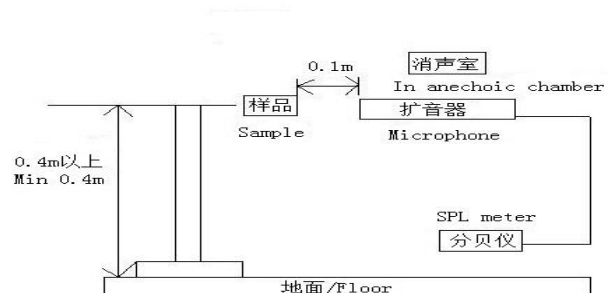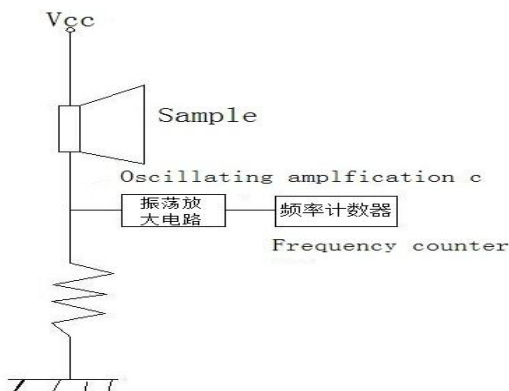


项目/Item	试验条件/Test condition	判断标准/Criteria	引用规格
1 高温保存试验 High temperature Preservation	+85°C环境下放置24小时 Exposure to +85°C for 24 hrs.	经过测试,符合规格,没有任何不合格的外观和性能 After the test the part shall meet specificati- ons without any degra.	
2 低温保存试验 Low temperature preservation	-20°C环境下放置24小时 Exposure to -20°C for 24 hrs.		
3 高温试验 High temperature Shock			
4 低温试验 Low temperature Shock			
5 常温寿命试验 Ordinary Temp. Life	常温 (25°C±10°C) 电压5VDC连续测试48小时 Driving the sounder at 5VDC for 48hrs in the room temperature (25°C±10°C)		
6 高温寿命试验 High Temp. Life	高温 (+85°C) 电压5VDC连续测试2小时 Driving the sounder at 5VDC for 2hrs in the low temperature (+85°C)		
7 低温寿命试验 Low Temp. Life	低温 (-20°C) 电压5VDC连续测试2小时 Driving the sounder at 5VDC for 2hrs in the low temperature (-20°C)		
8 端子拉力试验 Lead strength	10N的拉力在端子上拉10±1秒 Pull load on the direction of the terminal axis for 10±1 sec.		
9 跌落试验 Free drop	70cm高自由掉落到厚40mm的木板上, 每个方向一次 Free drop, 70cm height, on wood board (t40mm) X, Y, Z 3Direction 1time each, total 3times.	排除弯曲的针 Exclude bending of Pin	
10 端子可焊性试验 Solderability	260±5°C焊接温度。时间: 5±0.5sec。 Temp. 260±5°C Soaking Time: 5±0.5sec	端子95%必须覆盖着焊料 95% surface of lead pins must be covered with fresh solder and no soldering holes Should be found	

一般公差	±0.3
角度公差	

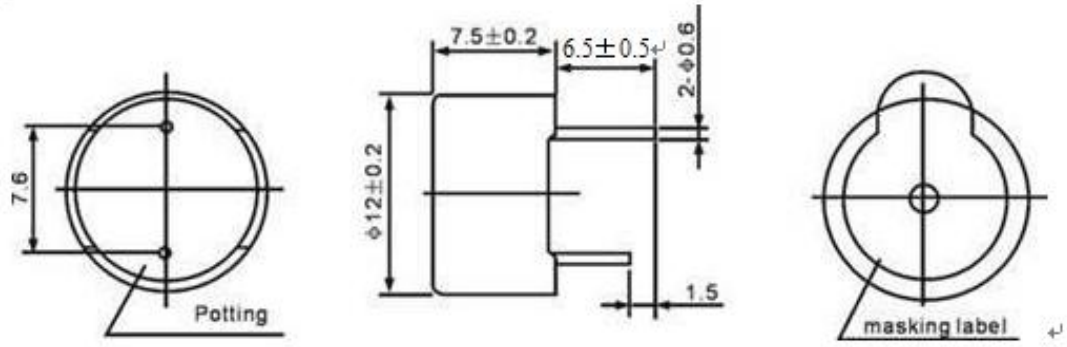

			审批 张长华	材料 PP0料	制造日期	出图日期
			检查 杨树银	加工 表面处理	品名 NAME	APPEARANCE DRWG
			设计	表面处理 第三角法		产品名称
日期 DATE	变更号码 CHANGE NO.	变更内容 CHANGE CONTENTS	江苏华能电子有限公司 HUANENG Electronic co.,Ltd		品号 CODE NO.	

产品特征图

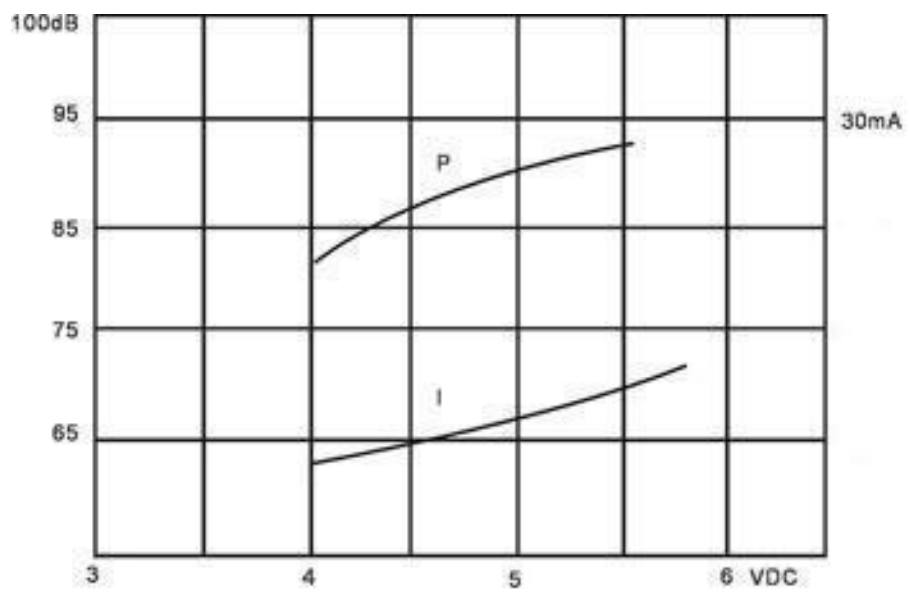

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Piezo Buzzers & Audio Indicators](#) category:*

*Click to view products by [Huaneng](#) manufacturer:*

Other Similar products are found below :

[6-4](#) [68S1240-PA](#) [ESZ-26B](#) [FDG06PSLLF](#) [F/DGX12P WITH LABEL LF](#) [F/EM12PLF](#) [PF-35N29WQ](#) [PFD-21A29W](#) [PFD-27A35PQ](#) [PL-21N30WQ](#) [PL-27A35PSQ](#) [PLD-21N30W](#) [PLD-21N30WQ](#) [PS-531Q](#) [PT-3534FP](#) [B822B](#) [B/CP28/100DB/BLACK LF](#) [S6109](#) [SC110E](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [ESZ-25B-5-250B](#) [ESZ-25S](#) [F/BC 35-DR LF](#) [FCM12PLF](#) [SSX-52SA](#) [F/EB20P-DR LF](#) [AI-4228-TF-LW305-R](#) [F/SU 21-02 LF](#) [F/TCW 05 WITH LABEL LF](#) [PFD-27N36W](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PLD-27A35PQ](#) [PS-552Q](#) [CM-5](#) [REF-202](#) [B/SE 128 RED LF](#) [KBS-20DA-7AS](#) [KBS-27DA-5C-105](#) [LSC628ANR](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [F-B-P1405ISB LF](#) [F/DGX 05P WITH LABEL LF](#)