

Description

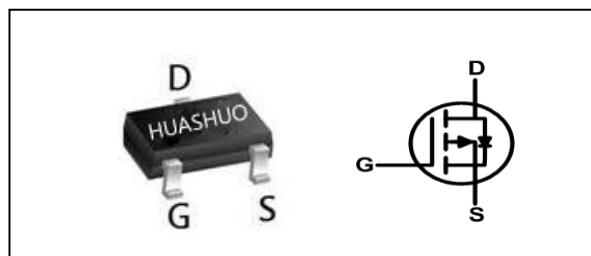
The AO3407A is the high cell density trenched P-ch MOSFETs, which provides excellent RDSON and efficiency for most of the small power switching and load switch applications.

The AO3407A meet the RoHS and Green Product requirement with full function reliability approved.

Product Summary

V _{DS}	-30	V
R _{DS(ON),typ}	47	mΩ
I _D	-4	A

SOT23s Pin Configuration



Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	-30	V
V _{GS}	Gate-Source Voltage	±20	V
I _D @T _c =25°C	Continuous Drain Current, V _{GS} @ -10V ¹	-4	A
I _D @T _c =70°C	Continuous Drain Current, V _{GS} @ -10V ¹	-3.6	A
I _{DM}	Pulsed Drain Current ²	-14	A
P _D @T _A =25°C	Total Power Dissipation ³	1.32	W
P _D @T _A =70°C	Total Power Dissipation ³	0.84	W
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction-ambient ¹	---	125	°C/W
R _{θJA}	Thermal Resistance Junction-Ambient ¹ (t ≤10s)	---	95	°C/W
R _{θJC}	Thermal Resistance Junction-Case ¹	---	80	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

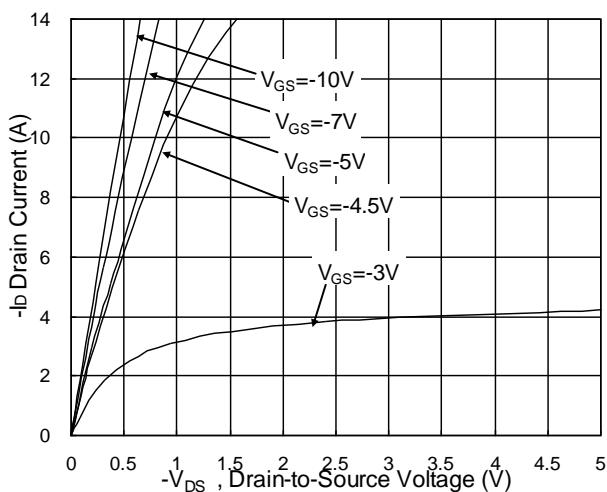
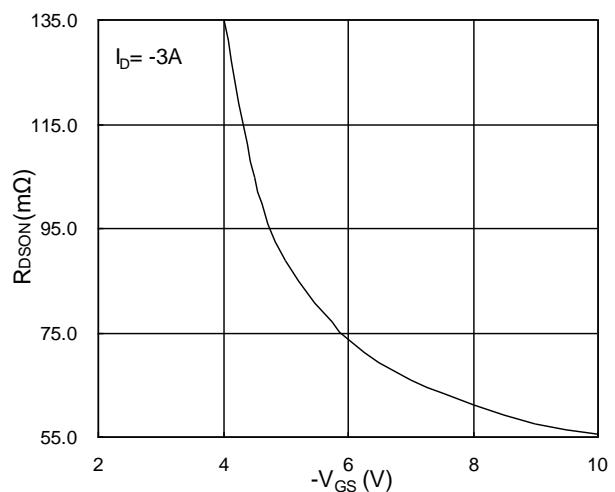
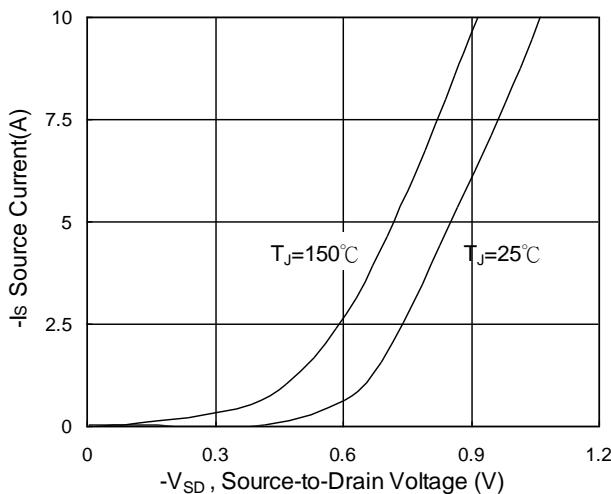
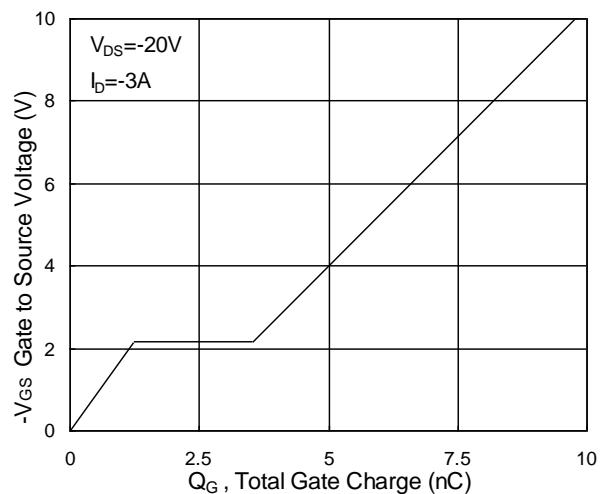
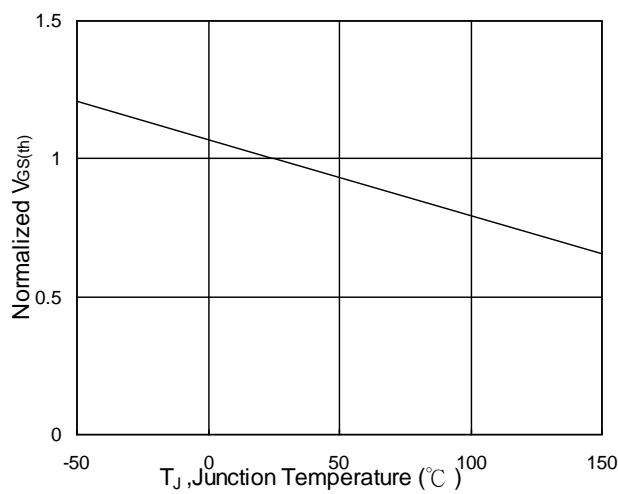
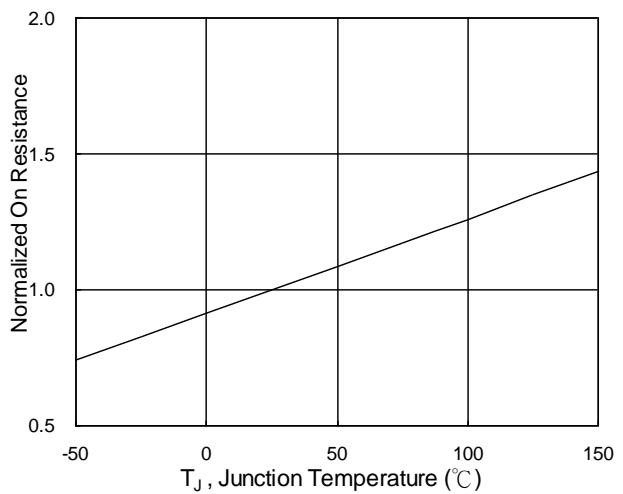
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_{\text{D}}=-250\mu\text{A}$	-30	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_{\text{D}}=-1\text{mA}$	---	-0.02	---	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=-10\text{V}$, $I_{\text{D}}=-3\text{A}$	---	47	60	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}$, $I_{\text{D}}=-1.5\text{A}$	---	65	90	
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_{\text{D}}=-250\mu\text{A}$	-1	-1.5	-2.2	V
$\Delta V_{\text{GS}(\text{th})}$	$V_{\text{GS}(\text{th})}$ Temperature Coefficient		---	4.32	---	$\text{mV}/^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=-24\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	-1	uA
		$V_{\text{DS}}=-24\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=55^\circ\text{C}$	---	---	-5	
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{\text{DS}}=-5\text{V}$, $I_{\text{D}}=-3\text{A}$	---	4.8	---	S
R_g	Gate Resistance	$V_{\text{DS}}=0\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	24	48	Ω
Q_g	Total Gate Charge (-4.5V)	$V_{\text{DS}}=-20\text{V}$, $V_{\text{GS}}=-4.5\text{V}$, $I_{\text{D}}=-3\text{A}$	---	5.22	7.3	nC
Q_{gs}	Gate-Source Charge		---	1.25	1.8	
Q_{gd}	Gate-Drain Charge		---	2.3	3.2	
$T_{\text{d}(\text{on})}$	Turn-On Delay Time	$V_{\text{DD}}=-15\text{V}$, $V_{\text{GS}}=-10\text{V}$, $R_{\text{G}}=3.3\Omega$ $I_{\text{D}}=1\text{A}$	---	18.4	37	ns
T_r	Rise Time		---	11.4	21	
$T_{\text{d}(\text{off})}$	Turn-Off Delay Time		---	39.4	79	
T_f	Fall Time		---	5.2	10.4	
C_{iss}	Input Capacitance	$V_{\text{DS}}=-15\text{V}$, $V_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	463	650	pF
C_{oss}	Output Capacitance		---	82	115	
C_{rss}	Reverse Transfer Capacitance		---	68	95	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current ^{1,4}	$V_G=V_D=0\text{V}$, Force Current	---	---	-4	A
I_{SM}	Pulsed Source Current ^{2,4}		---	---	-14	A
V_{SD}	Diode Forward Voltage ²	$V_{\text{GS}}=0\text{V}$, $I_s=-1\text{A}$, $T_J=25^\circ\text{C}$	---	---	-1	V

Note :

- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$
- 3.The power dissipation is limited by 150°C junction temperature
- 4.The data is theoretically the same as I_{D} and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

Fig.1 Typical Output Characteristics

Fig.2 On-Resistance vs. G-S Voltage

Fig.3 Forward Characteristics of Reverse

Fig.4 Gate-Charge Characteristics

Fig.5 Normalized $V_{GS(th)}$ vs. T_J

Fig.6 Normalized R_{DSON} vs. T_J



P-Ch 30V Fast Switching MOSFETs

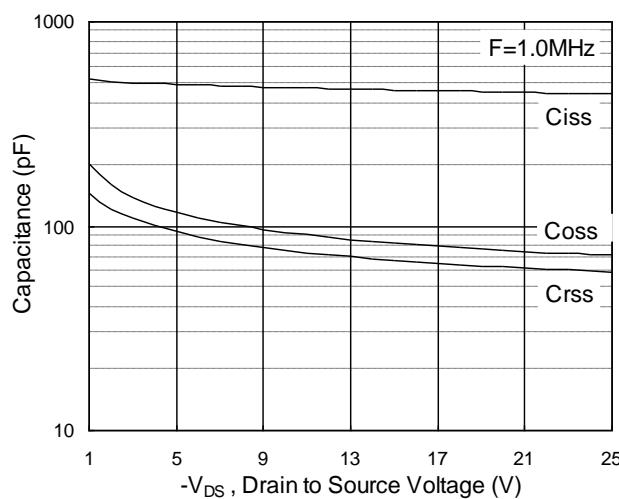


Fig.7 Capacitance

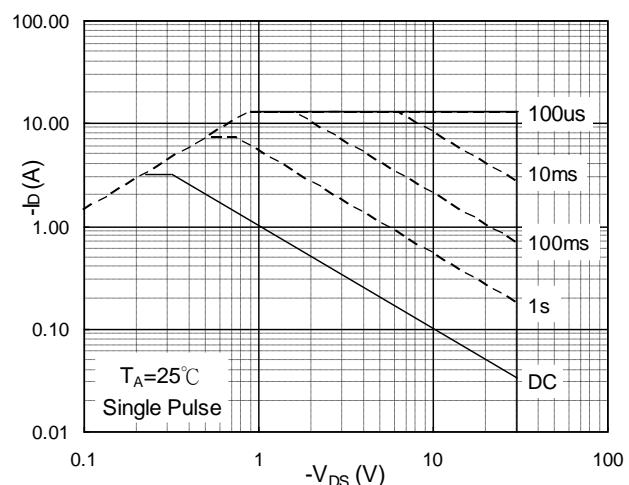


Fig.8 Safe Operating Area

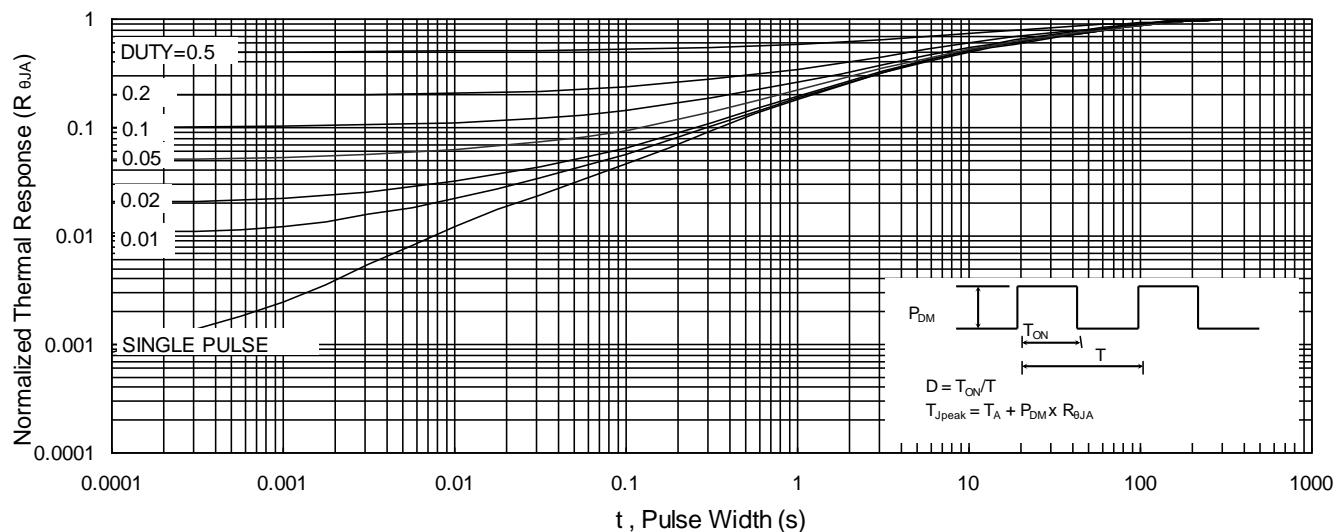


Fig.9 Normalized Maximum Transient Thermal Impedance

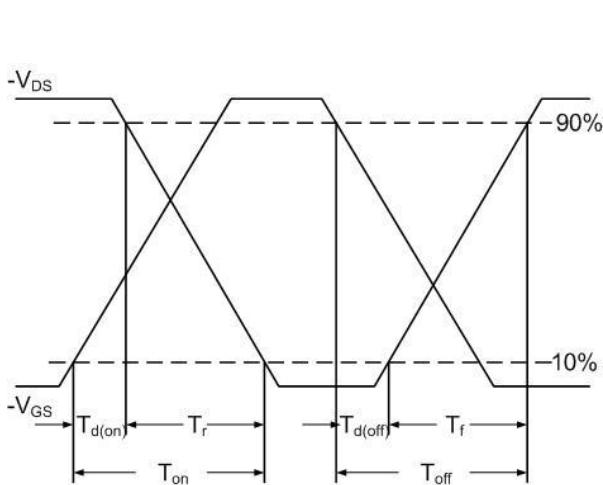


Fig.10 Switching Time Waveform

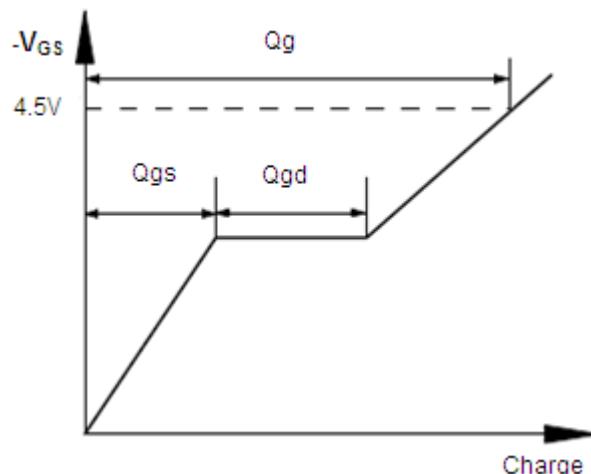
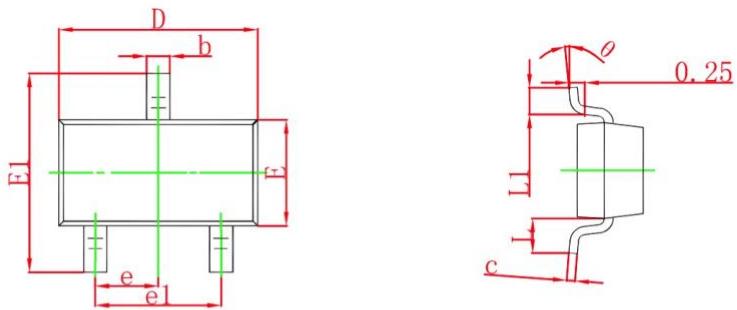


Fig.11 Gate Charge Waveform



Ordering Information

Part Number	Package code	Packaging
AO3407A	SOT-23	3000/Tape&Reel



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by HUASHUO manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#) [FCA20N60_F109](#) [FDZ595PZ](#) [AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#)
[405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T\)](#) [751625C](#) [PSMN4R2-30MLD](#)
[TK31J60W5,S1VQ\(O\)](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#)
[NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [STU5N65M6](#) [C3M0021120D](#) [DMN13M9UCA6-7](#)
[BSS340NWH6327XTSA1](#) [MCM3400A-TP](#) [DMTH10H4M6SPS-13](#) [IRF40SC240ARMA1](#) [IPS60R1K0PFD7SAKMA1](#)
[IPS60R360PFD7SAKMA1](#) [IPS60R600PFD7SAKMA1](#)