



## N-Ch 80V Fast Switching MOSFETs

### Description


The HSBA8048 is the high cell density trenched N-ch MOSFETs, which provide excellent RDSON and gate charge for most of the synchronous rectification applications.

The HSBA8048 meet the RoHS and Halogen-Free compliant product requirement, 100% EAS guaranteed with full function reliability approved.

### Product Summary

V <sub>DS</sub>	80	V
R <sub>DS(ON),TYP</sub>	4.3	mΩ
I <sub>D</sub>	48	A

### PRPAK5X6 Pin Configuration

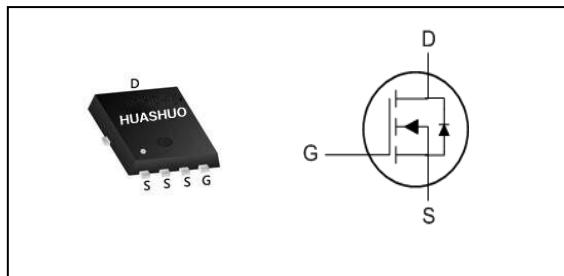

### Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V <sub>DS</sub>	Drain-Source Voltage	80	V
V <sub>GS</sub>	Gate-Source Voltage	±20	V
I <sub>D</sub> @T <sub>c</sub> =25°C	Continuous Drain Current, V <sub>GS</sub> @ 10V <sup>1,6</sup>	48	A
I <sub>D</sub> @T <sub>c</sub> =100°C	Continuous Drain Current, V <sub>GS</sub> @ 10V <sup>1,6</sup>	42.5	A
I <sub>DM</sub>	Pulsed Drain Current <sup>2</sup>	170	A
EAS	Single Pulse Avalanche Energy <sup>3</sup>	57.8	mJ
I <sub>AS</sub>	Avalanche Current	34	A
P <sub>D</sub> @T <sub>c</sub> =25°C	Total Power Dissipation <sup>4</sup>	56	W
T <sub>STG</sub>	Storage Temperature Range	-55 to 150	°C
T <sub>J</sub>	Operating Junction Temperature Range	-55 to 150	°C

### Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
R <sub>θJA</sub>	Thermal Resistance Junction-Ambient <sup>1</sup>	---	62	°C/W
R <sub>θJC</sub>	Thermal Resistance Junction-Case <sup>1</sup>	---	2.2	°C/W



**N-Ch 80V Fast Switching MOSFETs**

**Electrical Characteristics ( $T_J=25^{\circ}\text{C}$ , unless otherwise noted)**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$\text{V}_{\text{GS}}=0\text{V}$ , $\text{I}_{\text{D}}=250\mu\text{A}$	80	---	---	V
$\text{R}_{\text{DS(ON)}}$	Static Drain-Source On-Resistance <sup>2</sup>	$\text{V}_{\text{GS}}=10\text{V}$ , $\text{I}_{\text{D}}=20\text{A}$	---	4.3	6.5	$\text{m}\Omega$
$\text{R}_{\text{DS(ON)}}$	Static Drain-Source On-Resistance <sup>2</sup>	$\text{V}_{\text{GS}}=4.5\text{V}$ , $\text{I}_{\text{D}}=20\text{A}$	---	6.3	8.5	$\text{m}\Omega$
$\text{V}_{\text{GS(th)}}$	Gate Threshold Voltage	$\text{V}_{\text{GS}}=\text{V}_{\text{DS}}$ , $\text{I}_{\text{D}}=250\mu\text{A}$	1.2	---	2.3	V
$\text{I}_{\text{bss}}$	Drain-Source Leakage Current	$\text{V}_{\text{DS}}=64\text{V}$ , $\text{V}_{\text{GS}}=0\text{V}$ , $\text{T}_J=25^{\circ}\text{C}$	---	---	1	$\text{uA}$
		$\text{V}_{\text{DS}}=64\text{V}$ , $\text{V}_{\text{GS}}=0\text{V}$ , $\text{T}_J=55^{\circ}\text{C}$	---	---	5	
$\text{I}_{\text{GSS}}$	Gate-Source Leakage Current	$\text{V}_{\text{GS}}=\pm 20\text{V}$ , $\text{V}_{\text{DS}}=0\text{V}$	---	---	$\pm 100$	nA
$\text{g}_{\text{fs}}$	Forward Transconductance	$\text{V}_{\text{DS}}=5\text{V}$ , $\text{I}_{\text{D}}=20\text{A}$	---	75	---	S
$\text{R}_{\text{g}}$	Gate Resistance	$\text{V}_{\text{DS}}=0\text{V}$ , $\text{V}_{\text{GS}}=0\text{V}$ , $f=1\text{MHz}$	---	0.5	---	$\Omega$
$\text{Q}_{\text{g}}$	Total Gate Charge (10V)	$\text{V}_{\text{DS}}=40\text{V}$ , $\text{V}_{\text{GS}}=10\text{V}$ , $\text{I}_{\text{D}}=20\text{A}$	---	40	---	$\text{nC}$
$\text{Q}_{\text{gs}}$	Gate-Source Charge		---	7.2	---	
$\text{Q}_{\text{gd}}$	Gate-Drain Charge		---	6.5	---	
$\text{T}_{\text{d(on)}}$	Turn-On Delay Time	$\text{V}_{\text{DD}}=40\text{V}$ , $\text{V}_{\text{GS}}=10\text{V}$ , $\text{R}_{\text{G}}=3\Omega$ , $\text{I}_{\text{D}}=20\text{A}$	---	8.3	---	$\text{ns}$
$\text{T}_{\text{r}}$	Rise Time		---	4.2	---	
$\text{T}_{\text{d(off)}}$	Turn-Off Delay Time		---	36	---	
$\text{T}_{\text{f}}$	Fall Time		---	6.9	---	
$\text{C}_{\text{iss}}$	Input Capacitance	$\text{V}_{\text{DS}}=40\text{V}$ , $\text{V}_{\text{GS}}=0\text{V}$ , $f=1\text{MHz}$	---	2860	---	$\text{pF}$
$\text{C}_{\text{oss}}$	Output Capacitance		---	410	---	
$\text{Cr}_{\text{ss}}$	Reverse Transfer Capacitance		---	38	---	

**Diode Characteristics**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$\text{I}_{\text{s}}$	Continuous Source Current <sup>1,5</sup>	$\text{V}_{\text{G}}=\text{V}_{\text{D}}=0\text{V}$ , Force Current	---	---	48	A
$\text{V}_{\text{SD}}$	Diode Forward Voltage <sup>2</sup>	$\text{V}_{\text{GS}}=0\text{V}$ , $\text{I}_{\text{s}}=\text{A}$ , $\text{T}_J=25^{\circ}\text{C}$	---	0.77	1.0	V
$\text{t}_{\text{rr}}$	Reverse Recovery Time	$\text{I}_{\text{F}}=20\text{A}$ , $d\text{I}/dt=100\text{A}/\mu\text{s}$ , $\text{T}_J=25^{\circ}\text{C}$	---	27	---	nS
$\text{Q}_{\text{rr}}$	Reverse Recovery Charge		---	89	---	nC

Note :

- 1.The data tested by surface mounted on a 1 inch<sup>2</sup> FR-4 board with 2OZ copper.
- 2.The data tested by pulsed , pulse width  $\leq 300\mu\text{s}$  , duty cycle  $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is  $\text{V}_{\text{DD}}=25\text{V}$ , $\text{V}_{\text{GS}}=10\text{V}$ , $\text{L}=0.1\text{mH}$ , $\text{I}_{\text{AS}}=34\text{A}$
- 4.The power dissipation is limited by  $150^{\circ}\text{C}$  junction temperature
- 5.The data is theoretically the same as  $\text{I}_{\text{D}}$  and  $\text{I}_{\text{DM}}$  , in real applications , should be limited by total power dissipation.
- 6.The maximum current rating is package limited.



N-Ch 80V Fast Switching MOSFETs

Typical Characteristics

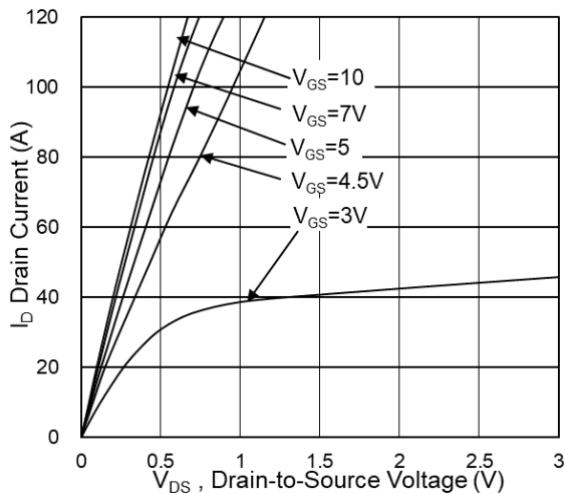


Fig.1 Typical Output Characteristics

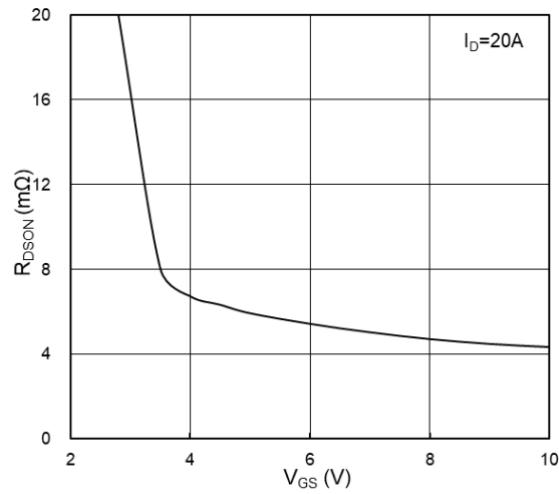


Fig.2 On-Resistance vs G-S Voltage

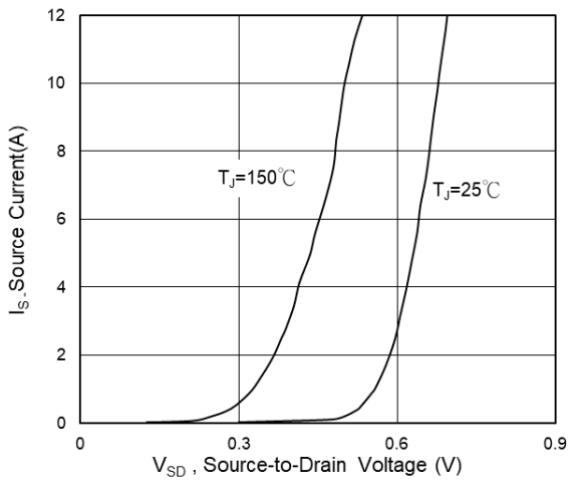


Fig.3 Source Drain Forward Characteristics

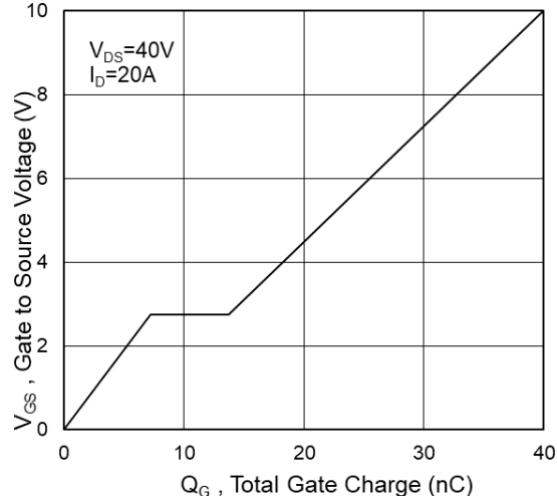


Fig.4 Gate-Charge Characteristics

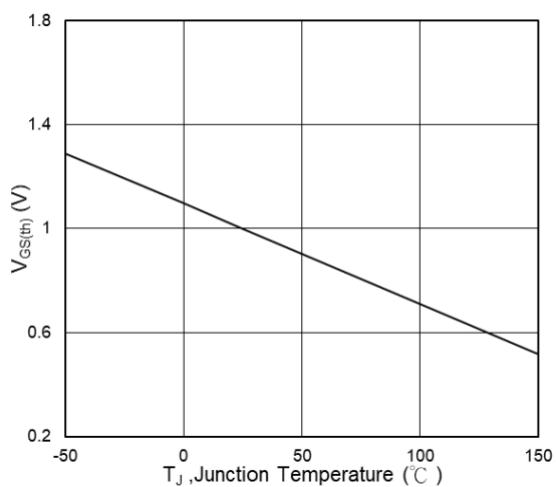


Fig.5 Normalized  $V_{GS(th)}$  vs.  $T_J$

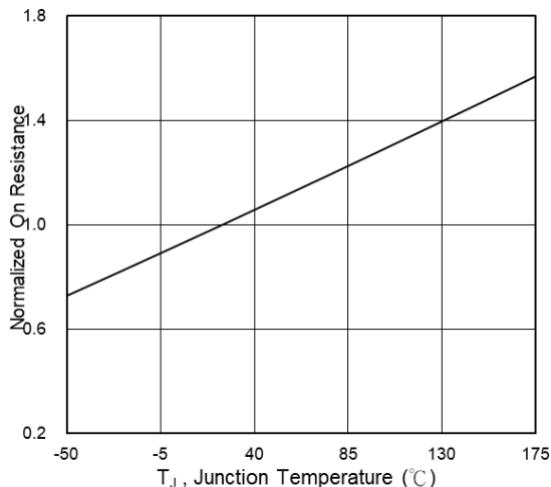


Fig.6 Normalized  $R_{DS(on)}$  vs.  $T_J$



N-Ch 80V Fast Switching MOSFETs

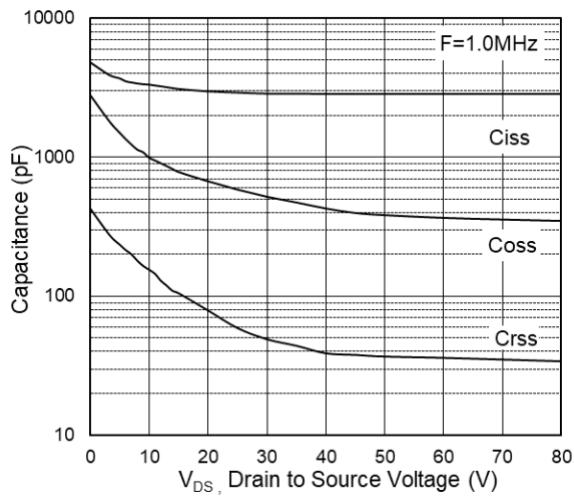


Fig.7 Capacitance

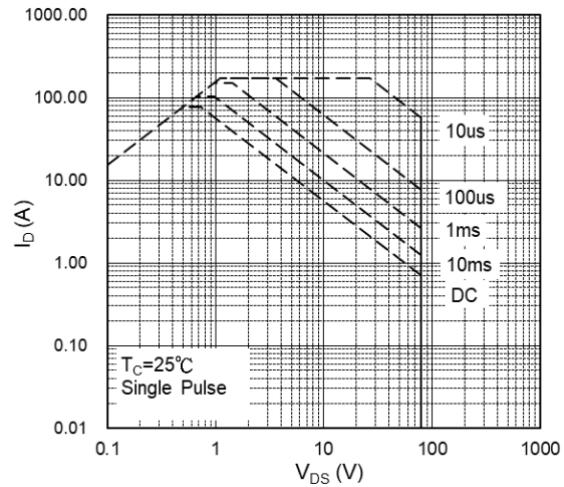


Fig.8 Safe Operating Area

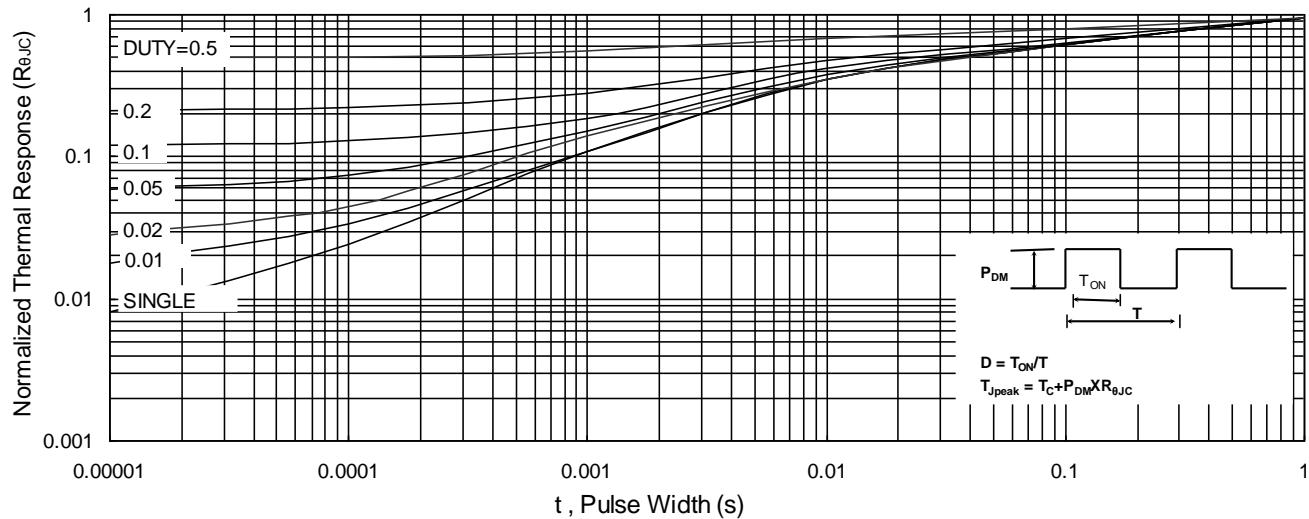


Fig.9 Normalized Maximum Transient Thermal Impedance

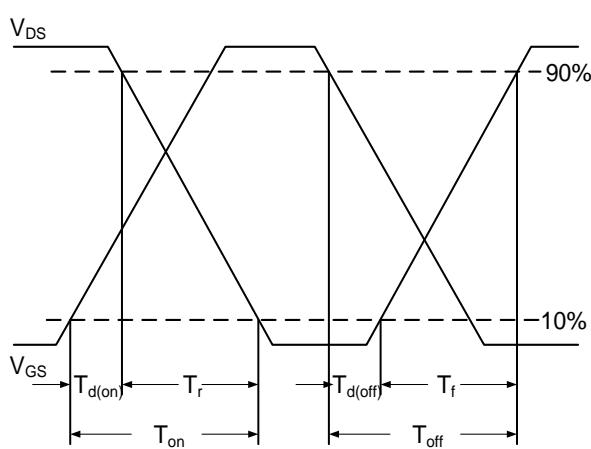


Fig.10 Switching Time Waveform

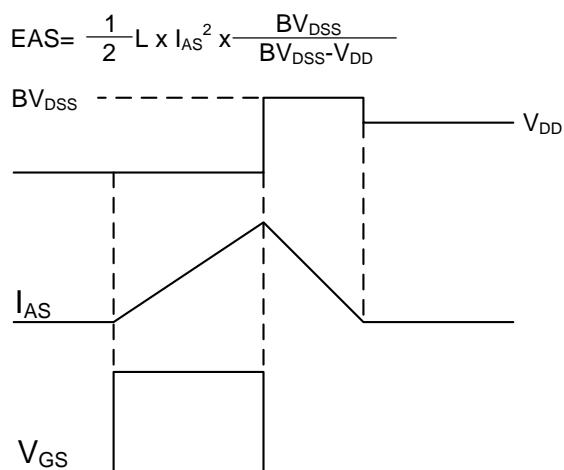


Fig.11 Unclamped Inductive Switching Waveform

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by HUASHUO manufacturer:***

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)  
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)  
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)  
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)  
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)  
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)