



KS 系列 Series

特点 Features

- 7mm高度, 105°C。7mmL, 105°C.
- 适用于汽车电子等线路中。
Used in car electronic circuits, etc.
- RoHS指令已对应完毕。Adapted to the RoHS directive.




主要技术性能 Specifications

项目 Item	特性 Performance Characteristics																								
使用温度范围 Operating Temperature Range	-40~+105°C																								
额定电压范围 Rated Voltage Range	6.3~63V																								
标称容量范围 Nominal Capacitance Range	0.1~470μF																								
标称容量允许偏差 Capacitance Tolerance	±20% (120Hz, +20°C)																								
漏电流 Leakage Current	$I \leq 0.01CV$ or $3(\mu A)$ 2分钟(at 20°C, after 2 minutes) 取较大者 (whichever is greater)																								
损耗角正切值 (tgδ) Dissipation Factor (+20°C, 120Hz)	<table border="1"> <thead> <tr> <th>U_R (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td>tgδ</td> <td>0.22</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> </tr> </tbody> </table>	U_R (V)	6.3	10	16	25	35	50	63	tgδ	0.22	0.20	0.16	0.14	0.12	0.10	0.10								
U_R (V)	6.3	10	16	25	35	50	63																		
tgδ	0.22	0.20	0.16	0.14	0.12	0.10	0.10																		
温度特性 Temperature Characteristics (Impedance ratio at 120Hz)	<table border="1"> <thead> <tr> <th>U_R (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td>Z-25°C / +20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / +20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	U_R (V)	6.3	10	16	25	35	50	63	Z-25°C / +20°C	4	3	2	2	2	2	2	Z-40°C / +20°C	8	6	4	4	3	3	3
U_R (V)	6.3	10	16	25	35	50	63																		
Z-25°C / +20°C	4	3	2	2	2	2	2																		
Z-40°C / +20°C	8	6	4	4	3	3	3																		
耐久性 Load Life	+105°C加额定电压1000小时, 恢复16小时后: After applying rated voltage for 1000 hours at +105°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±25%初始测量值以内 ±25% of the initial measured value 漏电流 Leakage current : ≤初始规定值 ≤the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value																								
高温贮存 Shelf Life	+105°C, 1000小时贮存后, 恢复16小时后: After storage for 1000 hours at +105°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±25%初始测量值以内 ±25% of the initial measured value 漏电流 Leakage current : ≤2倍初始规定值 ≤2times of the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value																								

频率修正系数 Frequency Coefficient

F(Hz)	60	120	1K	≥10K
0.1~68	0.8	1	1.3	1.5
100~470	0.8	1	1.15	1.2

外形图及尺寸表 Case Size Table

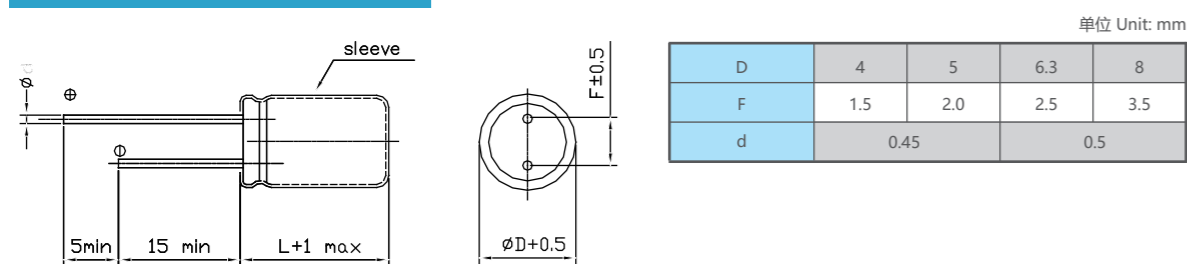

尺寸 Dimensions

CAP(μF)	WV	6.3V(0J)		10V(1A)		16V(1C)		25V(1E)		35V(1V)		50V(1H)		63V(1J)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	0R1											4×7	1.5		
0.22	R22											4×7	2.5		
0.33	R33											4×7	3.5		
0.47	R47											4×7	5.0		
1	010					4×7	6	4×7	7	4×7	6	4×7	10	4×7	12
2.2	2R2					4×7	8	4×7	9	4×7	8	4×7	19	4×7	18
3.3	3R3					4×7	10	4×7	11	4×7	10	4×7	24	5×7	25
4.7	4R7					4×7	12	4×7	15	4×7	22	4×7	27	5×7	28
10	100					4×7	24	4×7	28	4×7	29	5×7	40	6.3×7	40
22	220	4×7	31	4×7	33	4×7	37	5×7	45	5×7	50	6.3×7	60	8×7	65
						5×7	42	6.3×7	48	6.3×7	58	8×7	65		
33	330	4×7	37	4×7	41	5×7	48	5×7	52	6.3×7	59	8×7	78		
47	470	4×7	44	4×7	51	5×7	57	6.3×7	60	8×7	80	8×7	80		
100	101	5×7	68	5×7	75	6.3×7	89	8×7	115						
220	221	6.3×7	101	6.3×7	105	8×7	135								
				8×7	145										
330	331	8×7	120	6.3×7	110										
470	471	8×7	125												

Size φD×L(mm)
Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz



KS 系列 Series

特点 Features

- 7mm高度, 105°C。7mmL, 105°C.
- 适用于汽车电子等线路中。
Used in car electronic circuits, etc.
- RoHS指令已对应完毕。Adapted to the RoHS directive.


主要技术性能 Specifications

项目 Item	特性 Performance Characteristics																								
使用温度范围 Operating Temperature Range	-40~+105°C																								
额定电压范围 Rated Voltage Range	6.3~63V																								
标称容量范围 Nominal Capacitance Range	0.1~470μF																								
标称容量允许偏差 Capacitance Tolerance	±20% (120Hz, +20°C)																								
漏电流 Leakage Current	$I \leq 0.01CV$ or $3(\mu A)$ 2分钟(at 20°C, after 2 minutes) 取较大者 (whichever is greater)																								
损耗角正切值 (tgδ) Dissipation Factor (+20°C, 120Hz)	<table border="1"> <thead> <tr> <th>U_R (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td>tgδ</td> <td>0.22</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> </tr> </tbody> </table>	U_R (V)	6.3	10	16	25	35	50	63	tgδ	0.22	0.20	0.16	0.14	0.12	0.10	0.10								
U_R (V)	6.3	10	16	25	35	50	63																		
tgδ	0.22	0.20	0.16	0.14	0.12	0.10	0.10																		
温度特性 Temperature Characteristics (Impedance ratio at 120Hz)	<table border="1"> <thead> <tr> <th>U_R (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> </tr> </thead> <tbody> <tr> <td>Z-25°C / +20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / +20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	U_R (V)	6.3	10	16	25	35	50	63	Z-25°C / +20°C	4	3	2	2	2	2	2	Z-40°C / +20°C	8	6	4	4	3	3	3
U_R (V)	6.3	10	16	25	35	50	63																		
Z-25°C / +20°C	4	3	2	2	2	2	2																		
Z-40°C / +20°C	8	6	4	4	3	3	3																		
耐久性 Load Life	+105°C加额定电压1000小时, 恢复16小时后: After applying rated voltage for 1000 hours at +105°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±25%初始测量值以内 ±25% of the initial measured value 漏电流 Leakage current : ≤初始规定值 ≤the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value																								
高温贮存 Shelf Life	+105°C, 1000小时贮存后, 恢复16小时后: After storage for 1000 hours at +105°C and then resumed for 16 hours: 电容量变化率 Capacitance change : ±25%初始测量值以内 ±25% of the initial measured value 漏电流 Leakage current : ≤2倍初始规定值 ≤2times of the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value																								

频率修正系数 Frequency Coefficient

F(Hz)	60	120	1K	≥10K
0.1~68	0.8	1	1.3	1.5
100~470	0.8	1	1.15	1.2

外形图及尺寸表 Case Size Table

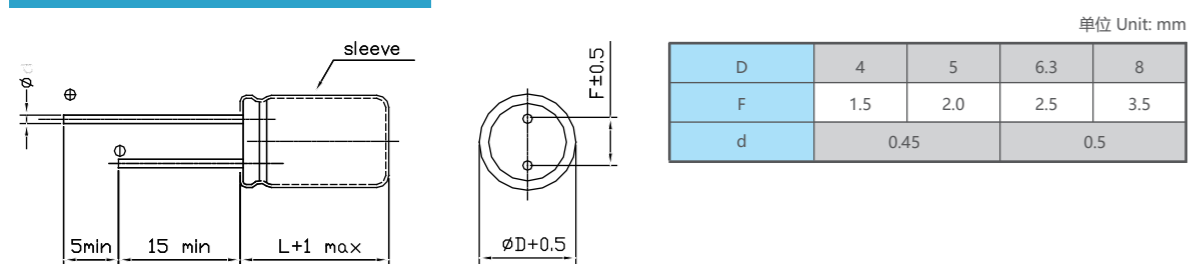

尺寸 Dimensions

CAP(μF)	WV	6.3V(0J)		10V(1A)		16V(1C)		25V(1E)		35V(1V)		50V(1H)		63V(1J)	
		Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	0R1											4×7	1.5		
0.22	R22											4×7	2.5		
0.33	R33											4×7	3.5		
0.47	R47											4×7	5.0		
1	010					4×7	6	4×7	7	4×7	6	4×7	10	4×7	12
2.2	2R2					4×7	8	4×7	9	4×7	8	4×7	19	4×7	18
3.3	3R3					4×7	10	4×7	11	4×7	10	4×7	24	5×7	25
4.7	4R7					4×7	12	4×7	15	4×7	22	4×7	27	5×7	28
10	100					4×7	24	4×7	28	4×7	29	5×7	40	6.3×7	40
22	220	4×7	31	4×7	33	4×7	37	5×7	45	5×7	50	6.3×7	60	8×7	65
33	330	4×7	37	4×7	41	5×7	48	5×7	52	6.3×7	59	8×7	78		
47	470	4×7	44	4×7	51	5×7	57	6.3×7	60	8×7	80	8×7	80		
100	101	5×7	68	5×7	75	6.3×7	89	8×7	115						
220	221	6.3×7	101	6.3×7	105	8×7	135								
330	331	8×7	120	6.3×7	110										
470	471	8×7	125												

Size φD×L(mm)
Maximum Allowable Ripple Current (mA rms) at 105°C 120Hz

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Huawei](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [1814181](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#)
[NEV100M63DE](#) [NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#)
[NEVH3.3M450CC](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [476CKH100MSA](#) [477RZS050M](#)
[UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#) [511D336M250EK5D](#) [052687X](#) [ECE-](#)
[A1CF471](#) [EKXG451ELL820MM30S](#) [686CKR050M](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)
[NEV4700M35HI](#) [NEV4.7M100BA](#) [NEV47M16BA](#) [NEV47M50CB-BULK](#) [NEVH1.0M350AB](#) [NEVH2.2M160AB](#) [NEVH3.3M350BC](#)
[TER330M50GM](#) [477KXM035MGBWSA](#)