



VB

铝电解电容器-贴片型

Aluminum electrolytic capacitor- SMD type

特点 Features

- 低阻抗。Low impedance.
- 适用于再流焊。Reflow soldering is available.
- 适用于高密度表面组装。available for high density surface mounting.
- 工作温度范围宽 (-55°C ~ +105°C) Operating over wide temperature range.
- RoHS指令 (2002/95/EC) 已对应完毕。Adapted to the RoHS directive (2002/95/EC) .




主要技术性能 Specifications


| 项目 Items | 特性 Performance Characteristics | | | | | | | | | |
|--|--|--|------|------|------|------|------|------|------|------|
| 工作温度范围 Operating Temperature Range | -55°C~+105°C | | | | | | | | | |
| 额定电压范围 Rated Voltage Range | 6.3V~100V | | | | | | | | | |
| 标称容量范围 Nominal Capacitance Range | 4.7~2200μF | | | | | | | | | |
| 标称容量允许偏差 Capacitance Tolerance | ±20% (20°C , 120Hz) | | | | | | | | | |
| 漏电流 Leakage Current | I ≤ 0.01CRVR or 3(μA), 取较大者 (2分钟) CR : 标称容量 (μF) UR : 额定电压 (V) I ≤ 0.01CRVR or 3(μA) Whichever is greater(at 20°C, after 2 minutes) CR: Nominal Capacitance (μF) UR: Rated voltages (V) | | | | | | | | | |
| 损耗角正切 (tgδ) Dissipation Factor (Max) 20°C, 120Hz | U _R (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 80 | 100 |
| | tgδ | 0.26 | 0.20 | 0.16 | 0.14 | 0.12 | 0.12 | 0.10 | 0.08 | 0.07 |
| 耐久性 Load Life | +105°C施加额定电压2000小时后, 电容器应满足以下要求: After 2000 hours application of rated voltage at 105°C, the capacitor shall meet the following requirement: | | | | | | | | | |
| | 容量变化率 Capacitance Change | ±30%初始值以内 Within ±30% of the initial value | | | | | | | | |
| | 损耗角正切 Dissipation Factor | ≤ 300%初始规定值 Not more than 300% of the initial specified value | | | | | | | | |
| 高温贮存 Shelf Life | +105°C 贮存1000小时后, 电容器应满足以上耐久性要求 After storage for 1000 hours at +105°C, the capacitors shall meet the requirement of load life above | | | | | | | | | |
| | 低温特性 Low Temperature Stability 阻抗比 Impedance Ratio (120Hz) | U _R (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | 63 | 80 |
| 耐焊接热 Resistance to Soldering Heat | 在250°C的条件下, 电容器在热板上保持30秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement. | | | | | | | | | |
| | 容量变化率 Capacitance Change | ±10%初始值以内 Within ±10% of the initial value | | | | | | | | |
| | 损耗角正切 Dissipation Factor | ≤ 初始规定值 Not more than the initial specified value | | | | | | | | |
| | 漏电流 Leakage Current | ≤ 初始规定值 Not more than the initial specified value | | | | | | | | |
| | | Z(-25°C)/Z(+20°C) | 4 | 3 | 2 | 2 | 2 | 2 | 2 | 2 |
| | | Z(-55°C)/Z(+20°C) | 8 | 5 | 4 | 3 | 3 | 3 | 3 | 3 |

外形图及尺寸表 Case Size Table

Φ4~Φ6.3

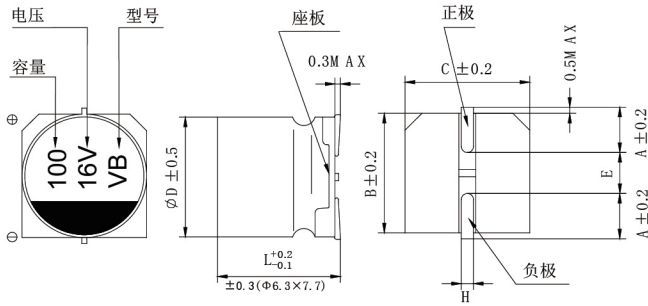

Φ8~Φ12.5

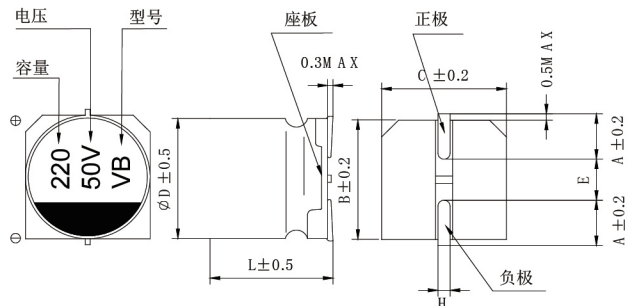

单位 Unit: mm

| | | | | | | | | |
|---|---------|-------|---------|---------|---------|---------|---------|-----------|
| | 4×5.4 | 5×5.4 | 6.3×5.4 | 6.3×7.7 | 8×10.5 | 10×10.5 | 10×12.5 | 12.5×13.5 |
| A | 1.35 | 2.1 | 2.4 | 2.4 | 2.9 | 3.2 | 3.2 | 4.7 |
| B | 4.3 | 5.3 | 6.6 | 6.6 | 8.3 | 10.3 | 10.3 | 13 |
| C | 4.3 | 5.3 | 6.6 | 6.6 | 8.3 | 10.3 | 10.3 | 13 |
| E | 1.0 | 1.3 | 2.2 | 2.2 | 3.1 | 4.5 | 4.5 | 4.5 |
| L | 5.4 | 5.4 | 5.4 | 7.7 | 10.5 | 10.5 | 12.5 | 13.5 |
| H | 0.5~0.8 | | | | 0.8~1.1 | | | |

标称电容量、额定电压、额定纹波电流与尺寸对应表
Nominal Capacitance, Rated Voltage, Rated Ripple Current and Case Size Table

| 电压 WV (Vdc) | 容量 Cap (μF) | 产品尺寸 Size | 纹波电流 mArms 100KHz/105°C | 阻抗 Impedance (Ω) 100KHz/25°C | 电压 WV (Vdc) | 容量 Cap (μF) | 产品尺寸 Size | 纹波电流 mArms 100KHz/105°C | 阻抗 Impedance (Ω) 100KHz/25°C |
|-------------|-------------|-----------|-------------------------|------------------------------|-------------|-------------|-----------|-------------------------|------------------------------|
| 6.3 | 22 | 4×5.4 | 80 | 1.8 | 35 | 10 | 5×5.4 | 150 | 0.76 |
| | 100 | 5×5.4 | 150 | 0.76 | | 22 | 6.3×5.4 | 230 | 0.44 |
| | 220 | 6.3×5.4 | 230 | 0.44 | | 47 | 6.3×7.7 | 280 | 0.34 |
| | 330 | 6.3×7.7 | 280 | 0.34 | | 100 | 8×10.5 | 600 | 0.17 |
| | 470 | 8×10.5 | 600 | 0.17 | | 220 | 10×10.5 | 850 | 0.09 |
| | 1000 | 10×10.5 | 850 | 0.09 | | 470 | 10×12.5 | 1000 | 0.075 |
| | 1500 | 10×12.5 | 1000 | 0.075 | | 330 | 12.5×13.5 | 1190 | 0.06 |
| 10 | 22 | 4×5.4 | 80 | 1.8 | 50 | 4.7 | 4×5.4 | 30 | 5 |
| | 47 | 5×5.4 | 150 | 0.76 | | 10 | 5×5.4 | 85 | 1.52 |
| | 100 | 6.3×5.4 | 230 | 0.44 | | 22 | 6.3×5.4 | 165 | 0.88 |
| | 220 | 6.3×7.7 | 280 | 0.34 | | 47 | 6.3×7.7 | 185 | 0.68 |
| | 470 | 8×10.5 | 600 | 0.17 | | 100 | 8×10.5 | 300 | 0.34 |
| | 1000 | 10×10.5 | 850 | 0.09 | | 220 | 10×10.5 | 670 | 0.18 |
| | 1500 | 12.5×13.5 | 1190 | 0.06 | | 330 | 12.5×13.5 | 650 | 0.12 |
| 16 | 10 | 4×5.4 | 80 | 1.8 | 63 | 4.7 | 5×5.4 | 50 | 3 |
| | 22 | 5×5.4 | 150 | 0.76 | | 10 | 6.3×5.4 | 80 | 1.75 |
| | 100 | 6.3×5.4 | 230 | 0.44 | | 22 | 6.3×7.7 | 120 | 1.2 |
| | 220 | 6.3×7.7 | 280 | 0.34 | | 47 | 8×10.5 | 250 | 0.65 |
| | 330 | 8×10.5 | 600 | 0.17 | | 100 | 10×10.5 | 400 | 0.35 |
| | 470 | 10×10.5 | 850 | 0.09 | | 220 | 12.5×13.5 | 720 | 0.15 |
| | 1000 | 12.5×13.5 | 1190 | 0.06 | | 10 | 6.3×7.7 | 60 | 2.4 |
| 25 | 10 | 4×5.4 | 80 | 1.8 | 80 | 22 | 8×10.5 | 130 | 1.3 |
| | 22 | 5×5.4 | 150 | 0.76 | | 47 | 10×10.5 | 200 | 0.7 |
| | 47 | 6.3×5.4 | 240 | 0.44 | | 220 | 12.5×13.5 | 470 | 0.32 |
| | 100 | 6.3×7.7 | 280 | 0.34 | | 10 | 6.3×7.7 | 60 | 2.4 |
| | 220 | 8×10.5 | 600 | 0.17 | | 22 | 8×10.5 | 130 | 1.3 |
| | 470 | 10×10.5 | 850 | 0.09 | | 47 | 10×10.5 | 200 | 0.7 |
| | 560 | 10×12.5 | 1000 | 0.075 | | 100 | 12.5×13.5 | 460 | 0.45 |
| 680 | 12.5×13.5 | 1190 | 0.06 | | | | | | |

额定纹波电流频率修正系数
Frequency correction factor for ripple current

| | | | | | |
|----------------|------|-------|-------|------|---------|
| Frequency 频率 | 50Hz | 120Hz | 300Hz | 1KHz | ≥ 10KHz |
| Coefficient 系数 | 0.35 | 0.50 | 0.64 | 0.83 | 1.00 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [Huawei manufacturer](#):

Other Similar products are found below :

[ULV2H4R7MNL1GS](#) [ULV2H1R8MNL1GS](#) [EMZA500ARA221MJA0G](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#)

[UCX1V471MNQ1MS](#) [10SVP120M](#) [DV100M050C055ETR](#) [RVJ-50V101MH10U-R](#) [AEH1012471M016R](#) [MAL213967339E3](#)

[GVT1C337M0608CNVC](#) [EMK1EM331FB0D00R](#) [EMF1CM221FB0D00R](#) [EMF1CM331FB0D00R](#) [EMF1CM471FB0D00R](#)

[EMK1JM101GB0D00R](#) [EMK1AM102GB0D00R](#) [EMK1HM221GB0D00R](#) [DV221M6R3E055ETR](#) [DV221M025E077ETR](#)

[RV331M025F105ETR](#) [RVT1A101M0505](#) [GVZ1H101M0607](#) [CK1E100M0405](#) [GVM1E331M0607](#) [VT100UF16V167RV0124](#)

[CS100UF35V167RV0155](#) [CK220UF16V167RV0142](#) [VT10UF16V167RV0128](#) [VT22UF35V167RV0131](#) [CS470UF10V167RV0150](#)

[CK100UF16V167RV0138](#) [CK220UF10V167RV0141](#) [RVT330UF25V167RV0055](#) [CS47UF16V167RV0152](#) [VT470UF16V167RV0135](#)

[CS100UF10V167RV0144](#) [126RV0017](#) [VT47UF35V167RV0137](#) [CS220UF35V167RV0148](#) [126RV0010](#) [126RV0009](#)

[VT220UF25V167RV160](#) [VT220UF16V167RV0088](#) [126RV0012](#) [126RV0011](#) [126RV0013](#) [126RV0018](#) [126RV0008](#)