



# VS 型片式铝电解电容

## Series Chip Type Aluminum Electrolytic Capacitors

### 特点 Features


- 产品直径 Case diameter:  $\Phi$  4mm –  $\Phi$  10mm.
- 适用于再流焊。Reflow soldering is available.
- 适用于高密度表面组装。Available for high density surface mounting.
- ROHS指令已对应完毕。Adapted to the ROHS directive.



### 主要技术性能 Specifications

项目 Items	特性 Performance Characteristics									
工作温度范围 Operating Temperature Range	-40°C ~ 85°C									
额定电压范围 Rated Voltage Range	6.3V ~ 100V									
标称容量范围 Nominal Capacitance Range	0.1 ~ 1500 $\mu$ F									
标称容量允许偏差 Nominal Capacitance Tolerance	$\pm$ 20% ( 20°C , 120Hz )									
漏电流 Leakage Current	$I \leq 0.01CRVR$ or 3( $\mu$ A), 取较大者 ( 2分钟 ) CR : 标称容量 ( $\mu$ F ) UR : 额定电压 ( V ) $I \leq 0.01CRVR$ or 3( $\mu$ A) Whichever is greater (at 20°C, After 2 minutes) CR: Nominal Capacitance ( $\mu$ F) UR: Rated voltages (V)									
损耗角正切 ( tg $\delta$ ) Dissipation Factor (Max) 20°C, 120Hz	$U_r$ (V)	6.3	10	16	25	35	50	63	100	
	tg $\delta$	0.28	0.24	0.20	0.16	0.14	0.12	0.12	0.10	
耐久性 Load Life	+85°C施加额定电压2000小时后, 电容器应满足以下要求: After 2000 hours' application of rated voltage at 85°C, the capacitor shall meet the following requirement:									
	容量变化率 Capacitance Change	$\pm$ 20%初始值以内 Within $\pm$ 20% of the initial value								
	损耗角正切 Dissipation Factor	$\leq$ 200%初始规定值 Not more than 200% of the initial specified value								
	漏电流 Leakage Current	$\leq$ 初始规定值 Not more than the initial specified value								
高温贮存 Shelf Life	+85°C贮存1000小时后, 电容器应满足以上耐久性要求 After storage for 1000 hours at +85°C, the capacitors shall meet the requirement of load life above									
低温特性 Low Temperature Stability 阻抗比 Impedance Ratio (120Hz)	$U_r$ (V)									
		6.3	10	16	25	35	50	63	100	
	Z(-25°C)/Z(+20°C)	< $\Phi$ 8	4	3	2	2	2	2	2	2
		$\geq \Phi$ 8	5	4	3	2	2	2	2	2
	Z(-40°C)/Z(+20°C)	< $\Phi$ 8	8	8	4	4	3	3	3	3
		$\geq \Phi$ 8	10	8	6	4	3	3	3	3
耐焊接热 Resistance to Soldering Heat	在250°C的条件下, 电容器在热板上保持30秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.									
	容量变化率 Capacitance Change	$\pm$ 10%初始值以内 Within $\pm$ 10% of the initial value								
	损耗角正切 Dissipation Factor	$\leq$ 初始规定值 Not more than the initial specified value								
	漏电流 Leakage Current	$\leq$ 初始规定值 Not more than the initial specified value								

### 外形图及尺寸表 Case Size Table

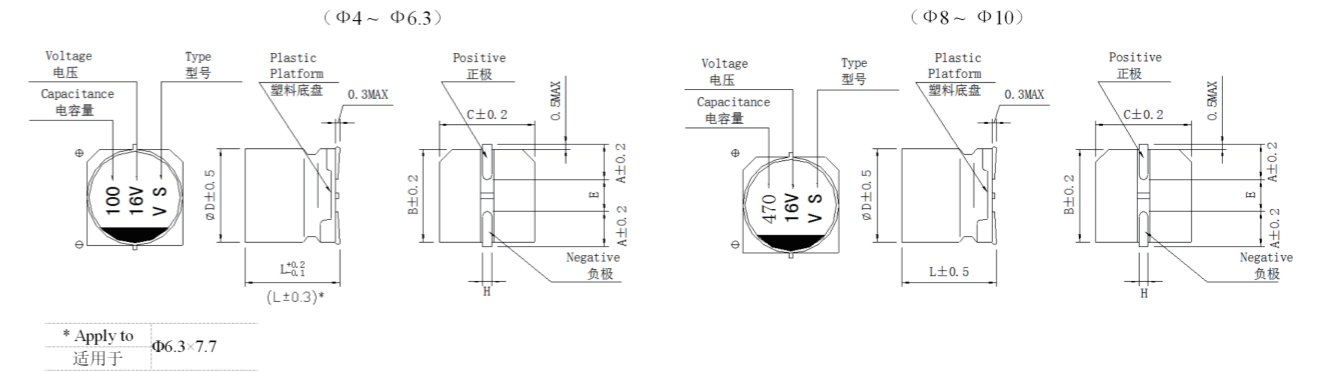

	4 × 5.4	5 × 5.4	6.3 × 5.4	6.3 × 7.7	8 × 6.5	8 × 10.5	10 × 10.5
A	1.8	2.1	2.4	2.4	2.9	2.9	3.2
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3
E	1.0	1.3	2.2	2.2	2.3	3.1	4.5
L	5.4	5.4	5.4	7.7	6.5	10.5	10.5
H	0.5 ~ 0.8			0.8 ~ 1.1			

### 标称容量、额定电压、额定纹波电流与尺寸对应表 Nominal Capacitance, Rated Voltage, Rated Ripple Current and Case Size Table

V μF	6.3		10		16		25		35		50		63		100		
	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	
0.1											4×5.4	3.2					
0.22											4×5.4	4.7					
0.33											4×5.4	5.7					
0.47											4×5.4	6.8					
1.0											4×5.4	10					
2.2											4×5.4	15					
3.3											4×5.4	18					
4.7											4×5.4	24					
											5×5.4	25					
10					4×5.4	26					5×5.4	41	6.3×7.7	50	8×10.5	77	
											6.3×5.4	43					
22	4×5.4	31			4×5.4	30	4×5.4	30	5×5.4	38	5×5.4	39	6.3×5.4	71	6.3×7.7	96	
					5×5.4	39	5×5.4	44	6.3×5.4	55	6.3×5.4	59					
33	4×5.4	31	4×5.4	34	5×5.4	44	5×5.4	46		6.3×5.4	65	6.3×7.7	94	8×10.5	117	10×10.5	130
	5×5.4	44	5×5.4	48	6.3×5.4	63	6.3×5.4	67									
47	4×5.4	40	5×5.4	47	5×5.4	52		6.3×5.4	70	6.3×7.7	94	6.3×7.7	105	10×10.5	140		
	5×5.4	52	6.3×5.4	67	6.3×5.4	75						8×10.5	140				
100	5×5.4	47	5×5.4	54		6.3×5.4	103	6.3×7.7	143	6.3×7.7	132	8×10.5	200				
	6.3×5.4	89	6.3×5.4	98						8×10.5	175	10×10.5	250				
220	6.3×5.4	91	6.3×7.7	173	6.3×7.7	162	8×10.5	230		8×10.5	200						
			8×6.5	250	8×10.5	280	10×10.5	310	10×10.5	310							
330	6.3×7.7	188	8×10.5	390	8×10.5	320		8×10.5	270		10×10.5	360					
								10×10.5	340								
470	8×10.5	380	8×10.5	390		8×10.5	350										
							10×10.5	420									
1000	8×10.5	370															
	10×10.5	700	10×10.5	580													
1500	10×10.5	750															

I~ = Rated ripple current (mA) (85°C, 120Hz) I~ = 额定纹波电流 (mA) (85°C, 120Hz)



# VS VS 型片式铝电解电容

## Series Chip Type Aluminum Electrolytic Capacitors

### 特点 Features


- 产品直径 Case diameter:  $\Phi$  4mm –  $\Phi$  10mm.
- 适用于再流焊。Reflow soldering is available.
- 适用于高密度表面组装。Available for high density surface mounting.
- ROHS指令已对应完毕。Adapted to the ROHS directive.



### 主要技术性能 Specifications

项目 Items	特性 Performance Characteristics										
工作温度范围 Operating Temperature Range	-40°C ~ 85°C										
额定电压范围 Rated Voltage Range	6.3V ~ 100V										
标称容量范围 Nominal Capacitance Range	0.1 ~ 1500 $\mu$ F										
标称容量允许偏差 Nominal Capacitance Tolerance	$\pm$ 20% ( 20°C , 120Hz )										
漏电流 Leakage Current	I $\leq$ 0.01CRVR or 3( $\mu$ A), 取较大者 ( 2分钟 ) CR : 标称容量 ( $\mu$ F ) UR : 额定电压 ( V ) I $\leq$ 0.01CRVR or 3( $\mu$ A) Whichever is greater (at 20°C, After 2 minutes) CR: Nominal Capacitance ( $\mu$ F) UR: Rated voltages (V)										
损耗角正切 ( tg $\delta$ ) Dissipation Factor (Max) 20°C, 120Hz	U <sub>r</sub> (V)	6.3	10	16	25	35	50	63	100		
	tg $\delta$	0.28	0.24	0.20	0.16	0.14	0.12	0.12	0.10		
耐久性 Load Life	+85°C施加额定电压2000小时后, 电容器应满足以下要求: After 2000 hours' application of rated voltage at 85°C, the capacitor shall meet the following requirement:										
	容量变化率 Capacitance Change	$\pm$ 20%初始值以内 Within $\pm$ 20% of the initial value									
	损耗角正切 Dissipation Factor	$\leq$ 200%初始规定值 Not more than 200% of the initial specified value									
	漏电流 Leakage Current	$\leq$ 初始规定值 Not more than the initial specified value									
高温贮存 Shelf Life	+85°C贮存1000小时后, 电容器应满足以上耐久性要求 After storage for 1000 hours at +85°C, the capacitors shall meet the requirement of load life above										
低温特性 Low Temperature Stability 阻抗比 Impedance Ratio (120Hz)	U <sub>r</sub> (V)										
		6.3	10	16	25	35	50	63	100		
	Z(-25°C)/Z(+20°C)	< $\Phi$ 8	4	3	2	2	2	2	2	2	
		$\geq \Phi$ 8	5	4	3	2	2	2	2	2	
	Z(-40°C)/Z(+20°C)	< $\Phi$ 8	8	8	4	4	3	3	3	3	
		$\geq \Phi$ 8	10	8	6	4	3	3	3	3	
耐焊接热 Resistance to Soldering Heat	在250°C的条件下, 电容器在热板上保持30秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.										
	容量变化率 Capacitance Change	$\pm$ 10%初始值以内 Within $\pm$ 10% of the initial value									
	损耗角正切 Dissipation Factor	$\leq$ 初始规定值 Not more than the initial specified value									
	漏电流 Leakage Current	$\leq$ 初始规定值 Not more than the initial specified value									

### 外形图及尺寸表 Case Size Table

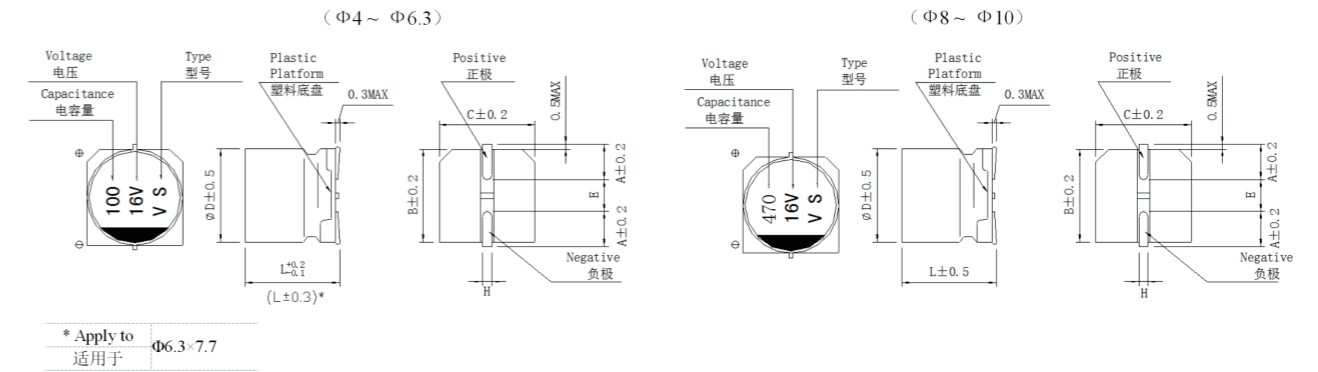

	4 × 5.4	5 × 5.4	6.3 × 5.4	6.3 × 7.7	8 × 6.5	8 × 10.5	10 × 10.5	
A	1.8	2.1	2.4	2.4	2.9	2.9	3.2	
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3	
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3	
E	1.0	1.3	2.2	2.2	2.3	3.1	4.5	
L	5.4	5.4	5.4	7.7	6.5	10.5	10.5	
H	0.5 ~ 0.8				0.8 ~ 1.1			

### 标称容量、额定电压、额定纹波电流与尺寸对应表 Nominal Capacitance, Rated Voltage, Rated Ripple Current and Case Size Table

V μF	6.3		10		16		25		35		50		63		100	
	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA	D×L mm	I~ mA
0.1											4×5.4	3.2				
0.22											4×5.4	4.7				
0.33											4×5.4	5.7				
0.47											4×5.4	6.8				
1.0											4×5.4	10				
2.2											4×5.4	15				
3.3											4×5.4	18				
4.7								4×5.4	22	4×5.4	20	4×5.4	24			
10					4×5.4	26	4×5.4	24	4×5.4	24	5×5.4	41	6.3×7.7	50	8×10.5	77
22	4×5.4	31	5×5.4	39	5×5.4	44	6.3×5.4	55	6.3×5.4	59	6.3×5.4	71	6.3×7.7	96	8×10.5	100
33	4×5.4	31	4×5.4	34	5×5.4	44	5×5.4	46	6.3×5.4	65	6.3×7.7	94	8×10.5	117	10×10.5	130
47	4×5.4	40	5×5.4	47	5×5.4	52	6.3×5.4	70	6.3×7.7	94	6.3×7.7	105	10×10.5	140		
100	5×5.4	47	5×5.4	54	6.3×5.4	103	6.3×7.7	143	6.3×7.7	132	8×10.5	200				
	6.3×5.4	89	6.3×5.4	98						8×10.5	175	10×10.5	250			
220	6.3×5.4	91	6.3×7.7	173	6.3×7.7	162	8×10.5	230	8×10.5	200	10×10.5	320				
			8×6.5	250	8×10.5	280	10×10.5	310	10×10.5	310						
330	6.3×7.7	188	8×10.5	390	8×10.5	320	8×10.5	270	10×10.5	340	10×10.5	360				
							10×10.5	340								
470	8×10.5	380	8×10.5	390	8×10.5	350	10×10.5	380								
						10×10.5	420									
1000	8×10.5	370	10×10.5	580												
	10×10.5	700														
1500	10×10.5	750														

I~ = Rated ripple current (mA) (85°C, 120Hz) I~ = 额定纹波电流 ( mA ) ( 85°C , 120Hz )

SOLID  
CHIP  
MINIATURE  
STANDARD  
LOW-ESR  
SWITCH-POWER  
LIGHTING  
SPECIAL  
SNAP-IN  
SCREW

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):*

*Click to view products by [Huawei manufacturer](#):*

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [UCX1V471MNQ1MS](#) [RVJ-50V101MH10U-R](#) [MAL224699909E3](#) [MAL224699813E3](#) [MAL215099818E3](#) [AEA1010102M016R](#) [AEH1012471M016R](#) [MAL213967339E3](#) [ATB106M050D058](#) [ATB476M050F065](#) [ATB476M035E058](#) [ATB107M016E058](#) [ATB107M035E077](#) [EMVE350ARA101MF80G](#) [EMHL250ARA221MHA0G](#) [ATB477M016F102](#) [EMK1EM331FB0D00R](#) [EMF1CM221FB0D00R](#) [EMF1CM331FB0D00R](#) [EMF1CM471FB0D00R](#) [EMK1JM101GB0D00R](#) [EMK1AM102GB0D00R](#) [EMK1HM221GB0D00R](#) [DV221M6R3E055ETR](#) [DV221M025E077ETR](#) [RV331M025F105ETR](#) [RVT1A101M0505](#) [GVZ1H101M0607](#) [CK1E100M0405](#) [GVM1E331M0607](#) [VT10UF100V167RV0127](#) [VT100UF16V167RV0124](#) [CS100UF35V167RV0155](#) [CK220UF16V167RV0142](#) [VT10UF16V167RV0128](#) [VT22UF35V167RV0131](#) [CS470UF10V167RV0150](#) [CK100UF16V167RV0138](#) [CK220UF10V167RV0141](#) [RVT330UF25V167RV0055](#) [CS47UF16V167RV0152](#) [VT470UF16V167RV0135](#) [CS100UF10V167RV0144](#) [126RV0017](#) [VT47UF35V167RV0137](#)