

VT 型片式铝电解电容

VT Series Chip Type Aluminum Electrolytic Capacitors


特点 Features

- 产品直径 Case diameter: $\Phi 4\text{mm} - \Phi 10\text{mm}$.
- 适用于再流焊。Reflow soldering is available.
- 适用于高密度表面组装。Available for high density surface mounting.
- 工作温度范围宽 (-40 ~ +105°C) Operating over wide temperature range.
- ROHS 指令已对应完毕。Adapted to the ROHS directive.

主要技术性能 Specifications

项目 Items	特性 Characteristics													
工作温度范围 Operating Temperature Range	-40°C ~ +105°C													
额定电压范围 Rated Voltage Range	6.3V ~ 50V													
标称电容量范围 Nominal Capacitance Range	0.1 ~ 1500μF													
标称电容量允许偏差 Nominal Capacitance Tolerance	$\pm 20\%$ (20°C, 120Hz)													
漏电流 Leakage Current	$I \leq 0.01C_R V_R$ or $3(\mu\text{A})$, 取较大者 (2分钟) C_R : 标称电容量 (μF) V_R : 额定电压 (V) $I \leq 0.01C_R V_R$ or $3(\mu\text{A})$ Whichever is greater(at 20°C, After 2 minutes) C_R : Nominal Capacitance (μF) V_R : Rated voltages (V)													
损耗角正切 (tgδ) Dissipation Factor (Max) 20°C, 120Hz	U_R (V)	4	6.3	10	16	25	35	50						
	$\text{tg}\delta$	0.35	0.28	0.24	0.20	0.16	0.14	0.12						
耐久性 Load Life	$+105^\circ\text{C}$ 施加额定电压 1000 小时后, 电容器应满足以下要求: After 1000 hours' application of rated voltage at 105°C , the capacitor shall meet the following requirement: <table border="1"> <tr> <td>电容量变化率 Capacitance Change</td> <td>±20% 初始值以内 Within ±20% of the initial value</td> </tr> <tr> <td>损耗角正切 Dissipation Factor</td> <td>≤ 200% 初始规定值 Not more than 200% of the initial specified value</td> </tr> <tr> <td>漏电流 Leakage Current</td> <td>≤ 初始规定值 Not more than the initial specified value</td> </tr> </table>								电容量变化率 Capacitance Change	±20% 初始值以内 Within ±20% of the initial value	损耗角正切 Dissipation Factor	≤ 200% 初始规定值 Not more than 200% of the initial specified value	漏电流 Leakage Current	≤ 初始规定值 Not more than the initial specified value
电容量变化率 Capacitance Change	±20% 初始值以内 Within ±20% of the initial value													
损耗角正切 Dissipation Factor	≤ 200% 初始规定值 Not more than 200% of the initial specified value													
漏电流 Leakage Current	≤ 初始规定值 Not more than the initial specified value													
电容量变化率 Capacitance Change	±20% 初始值以内 Within ±20% of the initial value													
损耗角正切 Dissipation Factor	≤ 200% 初始规定值 Not more than 200% of the initial specified value													
漏电流 Leakage Current	≤ 初始规定值 Not more than the initial specified value													
高温贮存 Shelf Life	$+105^\circ\text{C}$ 贮存 1000 小时后, 电容器应满足以上耐久性要求 After storage for 1000 hours at $+105^\circ\text{C}$, the capacitors shall meet the requirement of load life above													
低温特性 Low Temperature Stability 阻抗比 Impedance Ratio (120Hz)	U_R (V)	4	6.3	10	16	25	35	50						
	$Z(-25^\circ\text{C})/Z(+20^\circ\text{C})$	7	4	3	2	2	2	2						
	$Z(-40^\circ\text{C})/Z(+20^\circ\text{C})$	15	8	6	4	4	3	3						
耐焊接热 Resistance to Soldering Heat	在 250°C 的条件下, 电容器在热板上保持 30 秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.													
	电容量变化率 Capacitance Change	±10% 初始值以内 Within ±10% of the initial value												
	损耗角正切 (tgδ) Dissipation Factor	≤ 初始规定值 Not more than the initial specified value												
	漏电流 Leakage Current	≤ 初始规定值 Not more than the initial specified value												

尺寸图 Dimensions

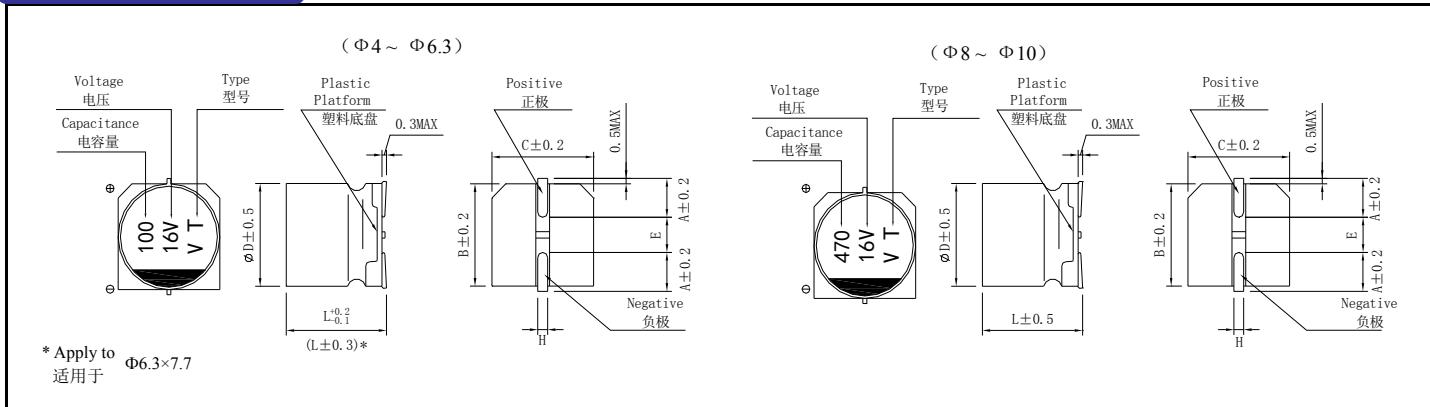

	4 × 5.4	5 × 5.4	6.3 × 5.4	6.3 × 7.7	8 × 6.5	8 × 10.5	10 × 10.5
A	1.8	2.1	2.4	2.4	2.9	2.9	3.2
B	4.3	5.3	6.6	6.6	8.3	8.3	10.3
C	4.3	5.3	6.6	6.6	8.3	8.3	10.3
E	1.0	1.3	2.2	2.2	2.3	3.1	4.5
L	5.4	5.4	5.4	7.7	6.5	10.5	10.5
H			0.5 ~ 0.8			0.8 ~ 1.1	

■ 标称电容量、额定电压、额定纹波电流与外形尺寸对应表

Nominal capacitance, rated voltage, rated ripple current and case size table

μF \ V	6.3		10		16		25		35		50	
	D×L mm	I~ mA										
0.1											4×5.4	2.3
0.22											4×5.4	3.4
0.33											4×5.4	4.1
0.47											4×5.4	5
1.0											4×5.4	10
2.2											4×5.4	16
3.3									4×5.4	13	4×5.4	16
4.7							4×5.4	22	4×5.4	22	5×5.4	23
10					4×5.4	28	5×5.4	28	5×5.4	30	6.3×5.4	32
22	4×5.4	29	5×5.4	30	5×5.4	39	6.3×5.4	55	6.3×5.4	60	6.3×7.7	51
33	5×5.4	34	5×5.4	34	5×5.4	35	6.3×5.4	65	8×6.5	84	6.3×7.7	70
47	5×5.4	46	6.3×5.4	48	6.3×5.4	70	6.3×5.4	70	6.3×7.7	80	6.3×7.7	80
100	6.3×5.4	71	6.3×5.4	69	6.3×5.4	70	6.3×7.7	100	8×10.5	296	8×10.5	230
220	6.3×7.7	120	6.3×7.7	120	6.3×7.7	120	8×10.5	320	10×10.5	435	10×10.5	375
330	8×10.5	290	8×10.5	305	8×10.5	425	10×10.5	450	10×10.5	450		
470	8×10.5	330	8×10.5	340	8×10.5	340	10×10.5	490				
1000	8×10.5	340	10×10.5	410	10×10.5	450						
1500	10×10.5	475										

I~ = Rated ripple current (mA) (105°C, 120Hz) I~ = 额定纹波电流 (mA) (105°C, 120Hz)

■ 额定纹波电流的频率系数 Frequency coefficient of ripple current

Frequency 频率	50Hz	120Hz	300Hz	1KHz	10K~100Hz
Coefficient 系数	0.70	1.00	1.17	1.36	1.50

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - SMD category:

Click to view products by Huawei manufacturer:

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)
[MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [AEH1010331M025R](#)
[AEA1010221M035R](#) [AEA1010470M080R](#) [AEH1010221M025R](#) [AEA1010102M016R](#) [AEA0810331M025R](#) [AEA1213102M025R](#)
[AEA1213331M050R](#) [AEH1012471M016R](#) [MAL213967339E3](#) [ZSC00AF221EARL](#) [VB1E100MB054000CE0](#) [RTV0J471M0607](#)
[RTV1000UF10V34RV0081](#) [XT100UF50V90RV0067](#) [RVE100UF16V67RV0046](#) [RST22UF35V025](#) [RTV100UF16V67RV0120](#)
[XT47UF50V90RV0082](#) [XT22UF50V90RV0083](#) [RST22UF50V026](#) [RST10UF16V013](#) [RST100UF25V004](#) [RST100UF35V009](#)
[RST47UF25V035](#) [RST47UF50V038](#) [RST220UF25V019](#) [RSL220UF25V021](#) [XT10UF25V90RV0068](#) [FZ100UF50V90RV0066](#)
[RST100UF16V003](#) [XT100UF10V90RV0060](#)