



VZ

铝电解电容器-贴片型

Aluminum electrolytic capacitor- SMD type

特点 Features


- 低阻抗。Low impedance.
- 适用于再流焊。Reflow soldering is available.
- 适用于高密度表面组装。available for high density surface mounting.
- 工作温度范围宽 (-55°C ~ +105°C) Operating over wide temperature range.
- RoHS指令对应完毕。Adapted to the RoHS directive.



主要技术性能 Specifications

项目 Items	特性 Performance Characteristics						
工作温度范围 Operating Temperature Range	-55~+105°C						
额定电压范围 Rated Voltage Range	6.3~50V						
标称容量范围 Nominal Capacitance Range	1~220μF						
标称容量允许偏差 Capacitance Tolerance	±20% (20°C, 120Hz)						
漏电流 Leakage Current	I ≤ 0.01CRVR or 3(μA), 取较大者 (2分钟) CR: 标称容量 (μF) UR: 额定电压 (V) I ≤ 0.01CRVR or 3(μA) Whichever is greater (at 20°C, after 2 minutes) CR: Nominal Capacitance (μF) UR: Rated voltages (V)						
损耗角正切 (tgδ) Dissipation Factor (Max) 20°C, 120Hz	U _R (V)	6.3	10	16	25	35	50
	tgδ	0.22	0.19	0.16	0.14	0.12	0.12
耐久性 Load Life	+105°C施加额定电压1000小时后, 电容器应满足以下要求: After 1000 hours' application of rated voltage at 105°C, the capacitor shall meet the following requirement:						
	容量变化率 Capacitance Change	±20%初始值以内 Within ±20% of the initial value					
	损耗角正切 Dissipation Factor	≤ 200%初始规定值 Not more than 200% of the initial specified value					
漏电流 Leakage Current	≤ 初始规定值 Not more than the initial specified value						
高温贮存 Shelf Life	+105°C贮存1000小时后, 电容器应满足以上耐久性要求 After storage for 1000 hours at +105°C, the capacitors shall meet the requirement of load life above						
低温特性 Low Temperature Stability 阻抗比 Impedance Ratio (120Hz)	U _R (V)	6.3	10	16	25	35	50
	Z(-25°C)/Z(+20°C)	2	2	2	2	2	2
	Z(-55°C)/Z(+20°C)	4	4	3	3	3	3
耐焊接热 Resistance to Soldering Heat	在250°C的条件下, 电容器在热板上保持30秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.						
	容量变化率 Capacitance Change	±10%初始值以内 Within ±10% of the initial value					
	损耗角正切 Dissipation Factor	≤ 初始规定值 Not more than the initial specified value					
漏电流 Leakage Current	≤ 初始规定值 Not more than the initial specified value						

外形图及尺寸表 Case Size Table

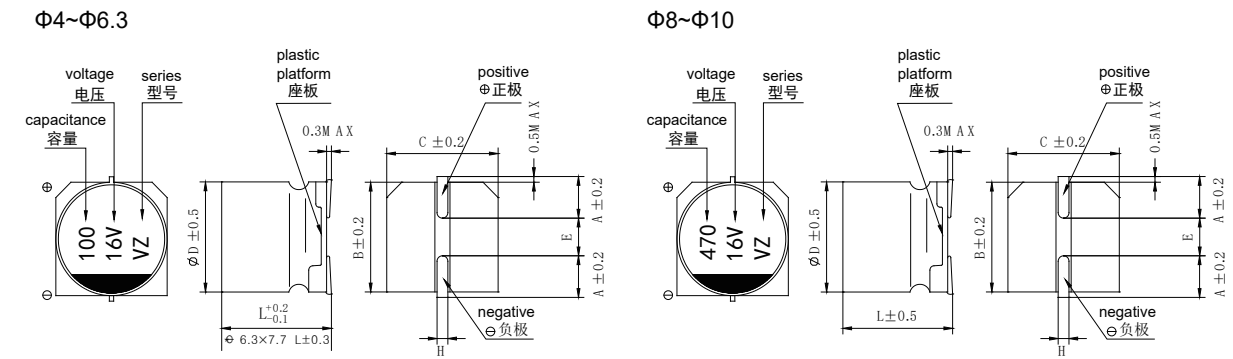

单位 Unit: mm

	4×5.4	5×5.4	6.3×5.4	6.3×7.7	8×10.5	10×10.5
A	3.0	2.1	2.4	2.4	2.9	3.2
B	4.3	5.3	6.6	6.6	8.3	10.3
C	4.3	5.3	6.6	6.6	8.3	10.3
E	1.0	1.3	2.2	2.2	3.1	4.5
L	5.4	5.4	5.4	7.7	10.5	10.5
H	0.5~0.8			0.8~1.1		

标称容量、额定电压、额定纹波电流与尺寸对应表 Nominal Capacitance, Rated Voltage, Rated Ripple Current and Case Size Table

V μF	6.3			10			16			25			35			50		
	D×L mm	Impedance Ω	I~mA	D×L mm	Impedance Ω	I~mA	D×L mm	Impedance Ω	I~mA	D×L mm	Impedance Ω	I~mA	D×L mm	Impedance Ω	I~mA	D×L mm	Impedance Ω	I~mA
1.0																4×5.4	5.0	30
4.7													4×5.4	3.0	50	5×5.4	3.0	50
10							4×5.4	3.0	50	4×5.4	3.0	50	5×5.4	1.8	80	6.3×5.4	2.0	60
22	4×5.4	3.0	50	4×5.4	3.0	50	5×5.4	1.8	80	5×5.4	1.8	80	5×5.4	1.8	80	6.3×5.4	2.0	60
33	5×5.4	1.8	80	5×5.4	1.8	80	5×5.4	1.8	80	5×5.4	1.8	80	6.3×5.4	1.0	115	6.3×7.7	1.4	100
47	5×5.4	1.8	80	5×5.4	1.8	30	5×5.4	1.8	80	6.3×5.4	1.0	115	6.3×5.4	1.0	115	6.3×7.7	1.4	100
100	6.3×5.4	1.0	115	6.3×5.4	1.0	115	6.3×5.4	1.0	115	6.3×7.7	0.7	150	6.3×7.7	0.7	150	8×10.5	0.6	130
220	6.3×5.4	1.0	115	6.3×7.7	0.7	150	6.3×7.7	0.7	150	8×10.5	0.3	220	8×10.5	0.3	220	10×10.5	0.3	210
330	6.3×7.7	0.7	150	8×10.5	0.3	220	8×10.5	0.3	220	8×10.5	0.3	220	10×10.5	0.15	330			
470	8×10.5	0.3	220	8×10.5	0.3	220	8×10.5	0.3	220	10×10.5	0.15	330						
1000	10×10.5	0.15	330	10×10.5	0.15	330	10×10.5	0.15	330									

I~ = Rated ripple current (mA) (105°C, 100KHz) I~ = 额定纹波电流 (mA) (105°C, 100KHz)
Low impedance (20°C 100KHz)

额定纹波电流频率修正系数 Frequency correction factor for ripple current

Frequency 频率	50Hz	120Hz	300Hz	1KHz	10KHz~100Hz
Coefficient 系数	0.35	0.50	0.64	0.83	1.00

ALUMINUM ELECTROLYTIC CAPACITORS
SMD
MINIATURE
STANDARD
LOW-ESR
SWITCH-POWER
LIGHTING
SNAP-IN
SCREW



VZ

铝电解电容器-贴片型

Aluminum electrolytic capacitor- SMD type

特点 Features


- 低阻抗。Low impedance.
- 适用于再流焊。Reflow soldering is available.
- 适用于高密度表面组装。available for high density surface mounting.
- 工作温度范围宽 (-55°C ~ +105°C) Operating over wide temperature range.
- RoHS指令对应完毕。Adapted to the RoHS directive.



主要技术性能 Specifications

项目 Items	特性 Performance Characteristics						
工作温度范围 Operating Temperature Range	-55~+105°C						
额定电压范围 Rated Voltage Range	6.3~50V						
标称容量范围 Nominal Capacitance Range	1~220μF						
标称容量允许偏差 Capacitance Tolerance	±20% (20°C, 120Hz)						
漏电流 Leakage Current	I ≤ 0.01CRVR or 3(μA), 取较大者 (2分钟) CR: 标称容量 (μF) UR: 额定电压 (V) I ≤ 0.01CRVR or 3(μA) Whichever is greater (at 20°C, after 2 minutes) CR: Nominal Capacitance (μF) UR: Rated voltages (V)						
损耗角正切 (tgδ) Dissipation Factor (Max) 20°C, 120Hz	U _R (V)	6.3	10	16	25	35	50
	tgδ	0.22	0.19	0.16	0.14	0.12	0.12
耐久性 Load Life	+105°C施加额定电压1000小时后, 电容器应满足以下要求: After 1000 hours' application of rated voltage at 105°C, the capacitor shall meet the following requirement:						
	容量变化率 Capacitance Change	±20%初始值以内 Within ±20% of the initial value					
	损耗角正切 Dissipation Factor	≤ 200%初始规定值 Not more than 200% of the initial specified value					
漏电流 Leakage Current	≤ 初始规定值 Not more than the initial specified value						
高温贮存 Shelf Life	+105°C贮存1000小时后, 电容器应满足以上耐久性要求 After storage for 1000 hours at +105°C, the capacitors shall meet the requirement of load life above						
低温特性 Low Temperature Stability 阻抗比 Impedance Ratio (120Hz)	U _R (V)	6.3	10	16	25	35	50
	Z(-25°C)/Z(+20°C)	2	2	2	2	2	2
	Z(-55°C)/Z(+20°C)	4	4	3	3	3	3
耐焊接热 Resistance to Soldering Heat	在250°C的条件下, 电容器在热板上保持30秒, 然后从热板上取出电容器, 让其在室温下恢复, 电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.						
	容量变化率 Capacitance Change	±10%初始值以内 Within ±10% of the initial value					
	损耗角正切 Dissipation Factor	≤ 初始规定值 Not more than the initial specified value					
漏电流 Leakage Current	≤ 初始规定值 Not more than the initial specified value						

外形图及尺寸表 Case Size Table

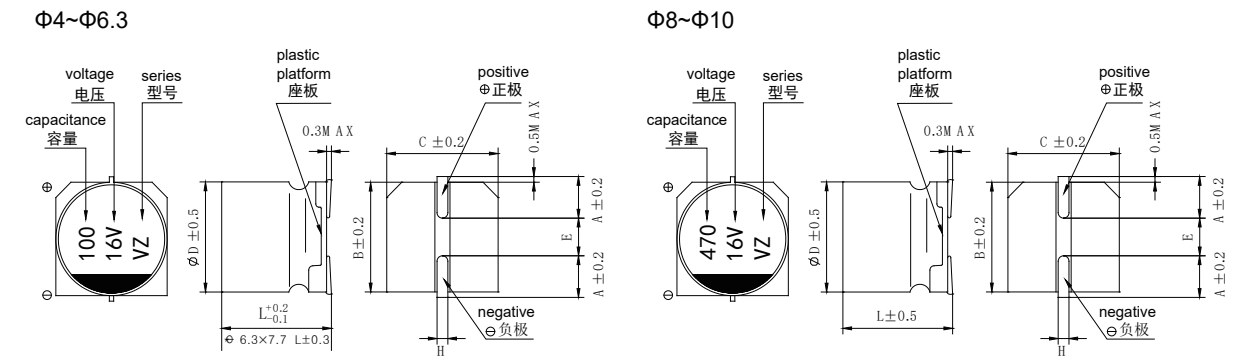

单位 Unit: mm

	4×5.4	5×5.4	6.3×5.4	6.3×7.7	8×10.5	10×10.5
A	3.0	2.1	2.4	2.4	2.9	3.2
B	4.3	5.3	6.6	6.6	8.3	10.3
C	4.3	5.3	6.6	6.6	8.3	10.3
E	1.0	1.3	2.2	2.2	3.1	4.5
L	5.4	5.4	5.4	7.7	10.5	10.5
H	0.5~0.8			0.8~1.1		

标称容量、额定电压、额定纹波电流与尺寸对应表 Nominal Capacitance, Rated Voltage, Rated Ripple Current and Case Size Table

V μF	6.3			10			16			25			35			50		
	D×L mm	Impedance Ω	I~mA	D×L mm	Impedance Ω	I~mA	D×L mm	Impedance Ω	I~mA	D×L mm	Impedance Ω	I~mA	D×L mm	Impedance Ω	I~mA	D×L mm	Impedance Ω	I~mA
1.0																4×5.4	5.0	30
4.7													4×5.4	3.0	50	5×5.4	3.0	50
10							4×5.4	3.0	50	4×5.4	3.0	50	5×5.4	1.8	80	6.3×5.4	2.0	60
22	4×5.4	3.0	50	4×5.4	3.0	50	5×5.4	1.8	80	5×5.4	1.8	80	5×5.4	1.8	80	6.3×5.4	2.0	60
33	5×5.4	1.8	80	5×5.4	1.8	80	5×5.4	1.8	80	5×5.4	1.8	80	6.3×5.4	1.0	115	6.3×7.7	1.4	100
47	5×5.4	1.8	80	5×5.4	1.8	30	5×5.4	1.8	80	6.3×5.4	1.0	115	6.3×5.4	1.0	115	6.3×7.7	1.4	100
100	6.3×5.4	1.0	115	6.3×5.4	1.0	115	6.3×5.4	1.0	115	6.3×7.7	0.7	150	6.3×7.7	0.7	150	8×10.5	0.6	130
220	6.3×5.4	1.0	115	6.3×7.7	0.7	150	6.3×7.7	0.7	150	8×10.5	0.3	220	8×10.5	0.3	220	10×10.5	0.3	210
330	6.3×7.7	0.7	150	8×10.5	0.3	220	8×10.5	0.3	220	8×10.5	0.3	220	10×10.5	0.15	330			
470	8×10.5	0.3	220	8×10.5	0.3	220	8×10.5	0.3	220	10×10.5	0.15	330						
1000	10×10.5	0.15	330	10×10.5	0.15	330	10×10.5	0.15	330									

I~ = Rated ripple current (mA) (105°C, 100KHz) I~ = 额定纹波电流 (mA) (105°C, 100KHz)
Low impedance (20°C 100KHz)

额定纹波电流频率修正系数 Frequency correction factor for ripple current

Frequency 频率	50Hz	120Hz	300Hz	1KHz	10KHz~100Hz
Coefficient 系数	0.35	0.50	0.64	0.83	1.00

ALUMINUM ELECTROLYTIC CAPACITORS
SMD
MINIATURE
STANDARD
LOW-ESR
SWITCH-POWER
LIGHTING
SNAP-IN
SCREW

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):

Click to view products by [Huawei manufacturer](#):

Other Similar products are found below :

[ULV2H4R7MNL1GS](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [UCX1V471MNQ1MS](#) [10SVP120M](#)
[DV100M050C055ETR](#) [RVJ-50V101MH10U-R](#) [AEH1012471M016R](#) [MAL213967339E3](#) [GVT1C337M0608CNVC](#) [ATB106M050D058](#)
[ATB476M050F065](#) [ATB476M035E058](#) [ATB107M016E058](#) [ATB107M035E077](#) [EMVE350ARA101MF80G](#) [EMHL250ARA221MHA0G](#)
[ATB477M016F102](#) [EMK1EM331FB0D00R](#) [EMF1CM221FB0D00R](#) [EMF1CM331FB0D00R](#) [EMF1CM471FB0D00R](#)
[EMK1JM101GB0D00R](#) [EMK1AM102GB0D00R](#) [EMK1HM221GB0D00R](#) [DV221M6R3E055ETR](#) [DV221M025E077ETR](#)
[RV331M025F105ETR](#) [RVT1A101M0505](#) [GVZ1H101M0607](#) [CK1E100M0405](#) [GVM1E331M0607](#) [VT10UF100V167RV0127](#)
[VT100UF16V167RV0124](#) [CS100UF35V167RV0155](#) [CK220UF16V167RV0142](#) [VT10UF16V167RV0128](#) [VT22UF35V167RV0131](#)
[CS470UF10V167RV0150](#) [CK100UF16V167RV0138](#) [CK220UF10V167RV0141](#) [RVT330UF25V167RV0055](#) [CS47UF16V167RV0152](#)
[VT470UF16V167RV0135](#) [CS100UF10V167RV0144](#) [126RV0017](#) [VT47UF35V167RV0137](#) [CS220UF35V167RV0148](#)