


Coaxial PCB Connector 82_MMBX-50-0-2/111_N

Description

Straight PCB jack

Interface Standards
SUHNER-MMBX

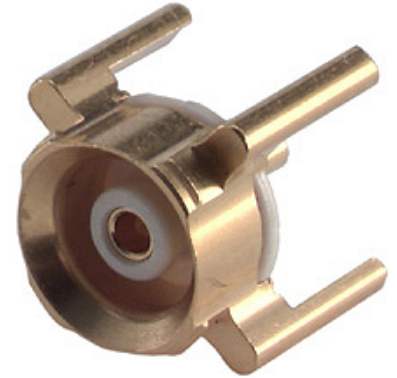

Technical Data

Electrical Data

Impedance	50 Ω	
Interface frequency max.	12.4 GHz	
Frequency range	DC to 2 GHz	2 to 6 GHz
Return loss	≥ 30 dB	≥ 23 dB

Mechanical Data

Board mounting type	through holes
Weight	0.0004 kg

Environmental Data

Operating temperature	-55 °C to 155 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer contact	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	LCP (Liquid crystal polymer)	

Related Documents

Outline drawing	DOU-00012955
Catalogue drawing	DCA-00012957
Mounting hole	DOU-00002008

Ordering Information

Single package	82_MMBX-50-0-2/111_NE
Tape and Reel package	82_MMBX-50-0-2/111_NM
Bulk 100 pcs package	82_MMBX-50-0-2/111_NH

Remarks

PCB connector with stand-offs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors](#) / [Coaxial Connectors](#) category:

Click to view products by [Huber & Suhner](#) manufacturer:

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [1200690078](#) [1-201144-1](#) [R107003010W](#) [R110A172100](#)