

PT01_LCMS_0000_O409E_XX.X_M0

Description

Single pigtail, LC-HQ BTW, MM, fiber 0.9mm_XX.X_heatviol, OM4 BendOptimized



Features	Features
- High mechanical stability	
- Colour coded boot for good visibility also in mated condition	

Technical Data

General Data

Description	Values
General Typ	LC pigtail
Operation temperature	up to °C
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes


Connector left

Description	Values
Connector typ	LC pigtail
Polish	UPC
Color Housing	Black
Color Boot	Heather violet
Design connector acc. To	IEC 61754-20, TIA 604-10-A
Performance class H+S	M
Insertion loss 97% dB / mean dB	0.25 / 0.12
Return Loss	35
Durability	1000
Performance class H+S	0

Cable

Description	Values
Cable typ	Semi-tight Tube
Fiber count	1
Fiber	1 x 0.9 mm
Fiber typ	G50/125-OM4 BendOptimized

Technical Drawing

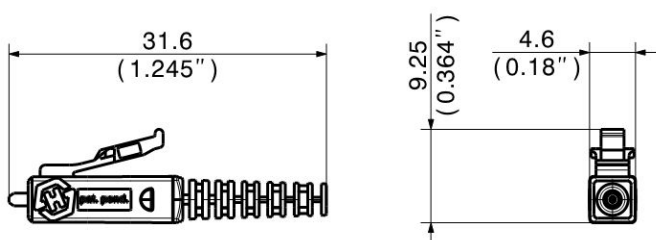

PT01_LCMS_0000_O409E_XX.X_M0

Ordering information

Meter (m)	Item number	Description
2	84151045	PT01_LCMS_0000_O409E_02.0_L0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Cable Assemblies](#) category:

Click to view products by [Huber & Suhner](#) manufacturer:

Other Similar products are found below :

[7-21002-9](#) [760-1518](#) [FA04390-50-M-72-LC-N](#) [MLB 501 V RED](#) [MLB 501 V YELLOW](#) [1-3636-600-5208](#) [2061529-7](#) [1-6693182-0](#)
[1754898-1](#) [21055-6](#) [FXBSCSCE2LM002](#) [3000005](#) [3-21053-2](#) [MLB 200/1 V BLACK](#) [MLB 2001 V RED](#) [MLB 2001 V YELLOW](#) [MLB 501](#)
[V BLACK](#) [5492011-6](#) [106284-7000](#) [5492011-5](#) [5492011-8](#) [5492011-9](#) [8-21007-5](#) [2123524-2](#) [2123524-1](#) [106386-4447](#) [DFSM-SCSC-2M](#)
[2123909-4](#) [2123909-8](#) [106273-0629](#) [2125046-1](#) [2821236-3](#) [2821310-2](#) [2821310-3](#) [2821313-4](#) [FX2ERLNLNSNM0.5](#) [CF-980062-074](#) [CF-](#)
[901200-394](#) [CF-980062-073](#) [CF-980062-071](#) [CF-980062-075](#) [CF-980062-072](#) [17-300310-100](#) [2821236-2](#) [2821313-1](#) [G-FC-FC-S-002.0-DX-](#)
[A-18-Y](#) [G-E2A-E2A-S-003.0-SX-A-18-Y](#) [956-322-502214](#) [FA04474](#) [1083665](#)