


Formable microwave cable SR_47_AL_TP Item: 22810510

Description

Semi-rigid: Semi-rigid, formable microwave cables
50 Ohm, 107 GHz, 100°C, ø1.19 mm, no jacket

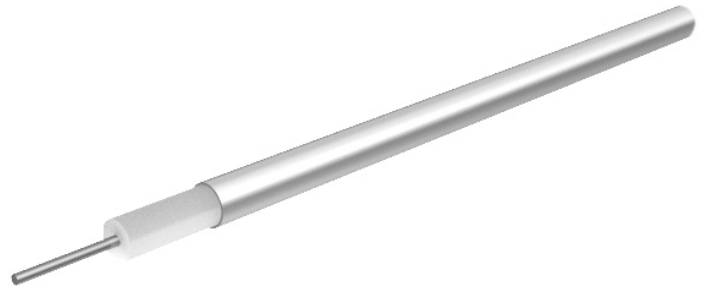

Technical Data

Construction

	Material	Detail	Diameter
Centre conductor	Steel, Copper+Silver plated	Wire	0.29 mm
Dielectric	PTFE (Polytetrafluoroethylene)		0.93 mm
Outer conductor	Aluminum / TP	Tube, 100%	1.19 mm

Electrical Data

Impedance	50 Ω +/- 2.5
Operating Frequency	107 GHz
Capacitance	105 pF/m
Velocity of signal propagation	69.5 %
Signal delay	4.8 ns/m
Screening effectiveness	≥ 120 dB (up to 18 GHz)
Operating voltage	≤ 1 kV _{rms} (at sea level)

Mechanical Data

Weight	0.31 kg/100 m
Min. bending radius	static 1.27 mm

Environmental Data

Temperature range	-55 °C ... +100 °C
Installation temperature	-20 °C... +60 °C
Halogen free	No
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant
1907/2006/EC (REACH)	compliant
2000/53/EC (ELV)	compliant
2012/19/EU (WEEE)	no special marking needed

Additional Information

Remarks

(For details refer to the HUBER+SUHNER RF CABLES GENERAL CATALOGUE or contact your nearest HUBER+SUHNER partner)

Suitable Connectors

Cable group	Y15 1 mm / 50 Ohm
-------------	-------------------

Formable microwave cable

SR_47_AL_TP Item: 22810510

Matrix typical Attenuation [formula: $(a \cdot f^{0.5} + b \cdot f)$] and maximum Power CW [formula: $(p/f^{0.5})$]

Coefficients:

a = 1.04044

b = 0.03967

f_{max} = 107

P at 1GHz = 32

Frequency (GHz)	Nom. attenuation (dB / m) sea level 25° C ambient temperature	Nom. attenuation (dB / ft) sea level 25° C ambient temperature	Max. CW power (W) sea level 40° C ambient temperature
5.35	2.62	0.798	14
10.7	3.83	1.167	10
16.05	4.8	1.464	8
21.4	5.66	1.726	7
26.75	6.44	1.964	6
32.1	7.17	2.185	6
37.45	7.85	2.393	5
42.8	8.5	2.592	5
48.15	9.13	2.783	5
53.5	9.73	2.966	4
58.85	10.32	3.144	4
64.2	10.88	3.317	4
69.55	11.44	3.486	4
74.9	11.98	3.650	4
80.25	12.5	3.811	4
85.6	13.02	3.969	3
90.95	13.53	4.124	3
96.3	14.03	4.276	3
101.65	14.52	4.426	3
107.0	15.01	4.574	3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Huber & Suhner](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#)
[24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-](#)
[50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [4814-BB-24](#)
[5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [MXHT83QE3000](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-](#)
[6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#)
[R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#) [PCX-18-50](#)