


Formable microwave cable

EZ_86_CU_M17 Item: 22810184

Description

Semi-rigid: Semi-rigid, formable microwave cables

RG405 dimension, MIL style, 50 Ohm, 40 GHz, 125°C, ø2.2 mm, no jacket

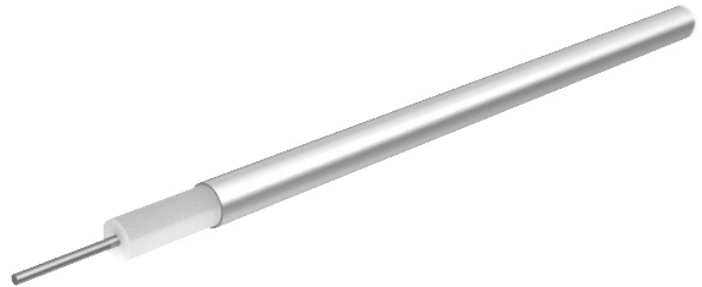

Technical Data

Construction

	Material	Detail	Diameter
Centre conductor	Copper, Silver plated	Wire	0.51 mm
Dielectric	PTFE (Polytetrafluoroethylene)		1.68 mm
Outer conductor	Copper	Tube, 100%	2.2 mm

Electrical Data

Impedance	50 Ω +/- 1.5
Operating Frequency	40 GHz
Capacitance	105 pF/m
Velocity of signal propagation	69.5 %
Signal delay	4.8 ns/m
Screening effectiveness	≥ 120 dB (up to 20 GHz)
Operating voltage	≤ 1.5 kV _{rms} (at sea level)
Test voltage	5 kV _{rms} (50 Hz/1 min)

Mechanical Data

Weight		2.38 kg/100 m
Min. bending radius	static	3.18 mm

Environmental Data

Temperature range	-55 °C ... +125 °C
Installation temperature	-20 °C... +60 °C
Halogen free	No
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant
1907/2006/EC (REACH)	compliant
2000/53/EC (ELV)	compliant
2012/19/EU (WEEE)	no special marking needed

Additional Information

Remarks

(For details refer to the HUBER+SUHNER RF CABLES GENERAL CATALOGUE or contact your nearest HUBER+SUHNER partner)

Suitable Connectors

Cable group	Y3 2 mm / 50 Ohm
-------------	------------------

Formable microwave cable

EZ_86_CU_M17 Item: 22810184

Matrix typical Attenuation [formula: $(a \cdot f^{0.5} + b \cdot f)$] and maximum Power CW [formula: $(p/f^{0.5})$]

Coefficients:

a = 0.58454

b = 0.03967

f_{max} = 40

P at 1GHz = 130

Frequency (GHz)	Nom. attenuation (dB / m) sea level 25° C ambient temperature	Nom. attenuation (dB / ft) sea level 25° C ambient temperature	Max. CW power (W) sea level 40° C ambient temperature
2.0	0.91	0.276	92
4.0	1.33	0.405	65
6.0	1.67	0.509	53
8.0	1.97	0.601	46
10.0	2.25	0.684	41
12.0	2.5	0.762	38
14.0	2.74	0.836	35
16.0	2.97	0.906	33
18.0	3.19	0.973	31
20.0	3.41	1.039	29
22.0	3.61	1.102	28
24.0	3.82	1.163	27
26.0	4.01	1.223	25
28.0	4.2	1.281	25
30.0	4.39	1.339	24
32.0	4.58	1.395	23
34.0	4.76	1.450	22
36.0	4.94	1.504	22
38.0	5.11	1.558	21
40.0	5.28	1.610	21

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coaxial Cables](#) category:

Click to view products by [Huber & Suhner](#) manufacturer:

Other Similar products are found below :

[89880-003-1000](#) [9116-010-U500](#) [1322R-010-1000](#) [1807A-B59-U1000](#) [2020K8421-9X-CS3417](#) [9251-010-1000](#) [9275-010-U1000](#) [275604-000](#) [935240-000](#) [9659-010-1000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#) [735A1-008-1000](#) [CBA-SMAM-NM1](#) [8212-010-U500](#) [8263 010U500](#) [480414-000](#) [5024A1311-0](#) [1530A 010U1000](#) [9248 010U1000](#) [1694A 0081000](#) [8241F J5C1000](#) [1674A TIN50](#) [9116SB 0101000](#) [9271 0061000](#) [1807A B591000](#) [5339Q5 009U500](#) [89207 010100](#) [C6424](#) [1369R 004500](#) [7915R 0101000](#) [M17/17600002/500](#) [132CX-06](#) [833101-000](#) [1152A-A8R-500](#) [9907-E4X-U1000](#) [3092A-X7E-500](#) [4505R-010-1000](#) [5021K1011-0](#) [LMR-500](#) [LMR-600-FR](#) [LMR-600](#) [LMR-600-DB](#)