


Formable microwave cable

SUCOFORM_141 Item: 22511925

Description

Sucoform: Formstable, hand-formable alternatives to semi-rigid microwave cables

RG402 dimension, 50 Ohm, 33 GHz, 165°C, ø3.58 mm, no jacket

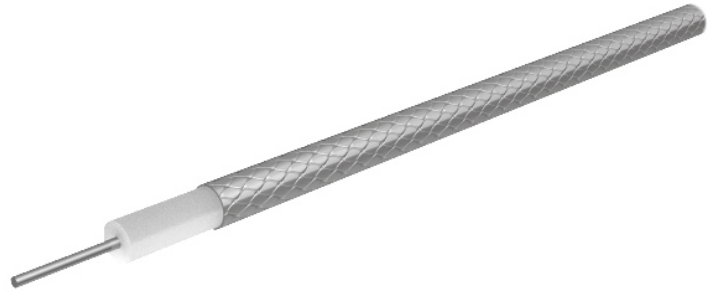

Technical Data

Construction

	Material	Detail	Diameter
Centre conductor	Steel, Copper+Silver plated	Wire	0.94 mm
Dielectric	PTFE (Polytetrafluoroethylene)		2.95 mm
Outer conductor	Copper, Tin plated	Tin soaked braid, 99%	3.58 mm

Print: HUBER+SUHNER SUCOFORM 141 50 Ohm (PA no.)

Electrical Data

Impedance	50 Ω +/- 2
Operating Frequency	33 GHz
Capacitance	92 pF/m
Velocity of signal propagation	71 %
Signal delay	4.7 ns/m
Screening effectiveness	≥ 100 dB (up to 18 GHz)
Operating voltage	≤ 1.9 kV _{rms} (at sea level)
Test voltage	5 kV _{rms} (50 Hz/1 min)

Mechanical Data

Weight		4 kg/100 m
Min. bending radius	static	8 mm
	repeated (for ≤ 50 bendings)	40 mm

Environmental Data

Temperature range	-65 °C ... +165 °C
Installation temperature	-20 °C... +60 °C
Flame propagation test	IEC 60332-1, UL 1581 § 1080 (VW-1)
Halogen free	No
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant
1907/2006/EC (REACH)	compliant
2000/53/EC (ELV)	compliant
2012/19/EU (WEEE)	no special marking needed

Additional Information

Remarks

(For details refer to the HUBER+SUHNER RF CABLES GENERAL CATALOGUE or contact your nearest HUBER+SUHNER partner)

Suitable Connectors

Cable group	Y12 3 mm / 50 Ohm
-------------	-------------------

Formable microwave cable

SUCOFORM_141 Item: 22511925

Matrix typical Attenuation [formula: $(a \cdot f^{0.5} + b \cdot f)$] and maximum Power CW [formula: $(p/f^{0.5})$]

Coefficients:

a = 0.355

b = 0.04

f_{max} = 33

P at 1GHz = 425

Frequency (GHz)	Nom. attenuation (dB / m) sea level 25° C ambient temperature	Nom. attenuation (dB / ft) sea level 25° C ambient temperature	Max. CW power (W) sea level 40° C ambient temperature
1,65	0,52	0,159	331
3,3	0,78	0,237	234
4,95	0,99	0,301	191
6,6	1,18	0,358	165
8,25	1,35	0,411	148
9,9	1,51	0,461	135
11,55	1,67	0,509	125
13,2	1,82	0,554	117
14,85	1,96	0,598	110
16,5	2,1	0,641	105
18,15	2,24	0,682	100
19,8	2,37	0,723	96
21,45	2,5	0,763	92
23,1	2,63	0,802	88
24,75	2,76	0,840	85
26,4	2,88	0,878	83
28,05	3,0	0,915	80
29,7	3,12	0,952	78
31,35	3,24	0,988	76
33,0	3,36	1,024	74

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coaxial Cables](#) category:

Click to view products by [Huber & Suhner](#) manufacturer:

Other Similar products are found below :

[89880-003-1000](#) [CY2389-000](#) [8221-010-U1000](#) [9116-010-U500](#) [1322R-010-1000](#) [1807A-B59-U1000](#) [2020K8421-9X-CS3417](#) [9251-010-1000](#) [9275-010-U1000](#) [935240-000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#) [144517-000](#) [735A1-008-1000](#) [8212-010-U500](#) [480414-000](#) [7915A 009U1000](#) [5024A1311-0](#) [1281S5 010250](#) [1530A 010U1000](#) [9248 010U1000](#) [9244 0101000](#) [1694A 0081000](#) [1190A 0101000](#) [8241F J5C1000](#) [1674A TIN50](#) [7915A 0091000](#) [TRCH-50-2](#) [9066 0031000](#) [7805R 008100](#) [1674A TIN100](#) [9116SB 0101000](#) [9271 0061000](#) [1613A 0101000](#) [1807A B591000](#) [5339Q5 009U500](#) [539945 0091000](#) [9116R 0101000](#) [89207 010100](#) [9058 0101000](#) [8241A 0101000](#) [DA7805R 0101000](#) [C6424](#)