

## Formable microwave cable


SUCOFORM\_141\_CT Item: 85063282

### Description

Sucoform: Formstable, hand-formable alternatives to semi-rigid microwave cables

RG402 dimension, phase stable over temperature, 50 Ohm, 30

GHz, 200°C, ø3.58 mm, no jacket

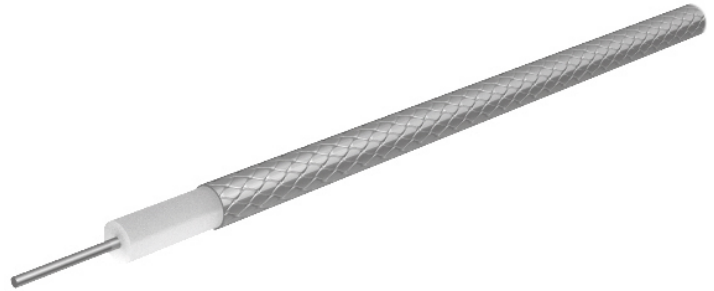

### Technical Data

#### Construction

	Material	Detail	Diameter
Centre conductor	Aluminium, Copper clad, Silver plated	Wire	1.15 mm
Dielectric	Low density fluorine polymer		2.95 mm
Outer conductor	Copper, Tin plated	Tin soaked braid, 99%	3.58 mm

Print: HUBER+SUHNER SUCOFORM 141 CT 50 Ohm (PA no.)

#### Electrical Data

Impedance		50 Ω +/- 2
Operating Frequency		30 GHz
Capacitance		80 pF/m
Velocity of signal propagation		83 %
Signal delay		4 ns/m
Screening effectiveness		≥ 100 dB (up to 18 GHz)
Operating voltage		≤ 0.5 kV <sub>rms</sub> (at sea level)
Test voltage		1.1 kV <sub>rms</sub> (50 Hz/1 min)
Phase vs Temperature	-55°C... + 125°C	500 ppm

#### Mechanical Data

Weight		3.3 kg/100 m
Min. bending radius	static	8 mm
	dynamic	40 mm

#### Environmental Data

Temperature range	-65 °C ... +200 °C
Installation temperature	-20 °C... +60 °C
Halogen free	No
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant
1907/2006/EC (REACH)	compliant
2000/53/EC (ELV)	compliant
2012/19/EU (WEEE)	no special marking needed

### Additional Information

#### Remarks

(For details refer to the HUBER+SUHNER RF CABLES GENERAL CATALOGUE or contact your nearest HUBER+SUHNER partner)

#### Suitable Connectors

Cable group	Y25 3mm / 50 Ohm
-------------	------------------

## Formable microwave cable

**SUCOFORM\_141\_CT** Item: **85063282**

**Matrix** typical Attenuation [ formula:  $(a \cdot f^{0.5} + b \cdot f)$  ] and maximum Power CW [ formula:  $(p/f^{0.5})$  ]

Coefficients:

a = 0.317

b = 0.032

f<sub>max</sub> = 30

P at 1GHz = 360

Frequency (GHz)	Nom. attenuation (dB / m) sea level 25° C ambient temperature	Nom. attenuation (dB / ft) sea level 25° C ambient temperature	Max. CW power (W) sea level 40° C ambient temperature
1,5	0,44	0,133	294
3,0	0,65	0,197	208
4,5	0,82	0,249	170
6,0	0,97	0,295	147
7,5	1,11	0,338	131
9,0	1,24	0,378	120
10,5	1,36	0,415	111
12,0	1,48	0,452	104
13,5	1,6	0,487	98
15,0	1,71	0,520	93
16,5	1,82	0,553	89
18,0	1,92	0,585	85
19,5	2,02	0,617	82
21,0	2,12	0,648	79
22,5	2,22	0,678	76
24,0	2,32	0,707	73
25,5	2,42	0,737	71
27,0	2,51	0,765	69
28,5	2,6	0,794	67
30,0	2,7	0,822	66

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Coaxial Cables](#) category:*

*Click to view products by [Huber & Suhner](#) manufacturer:*

Other Similar products are found below :

[89880-003-1000](#) [CY2389-000](#) [8221-010-U1000](#) [9116-010-U500](#) [1322R-010-1000](#) [1807A-B59-U1000](#) [2020K8421-9X-CS3417](#) [9251-010-1000](#) [9275-010-U1000](#) [935240-000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [535719-000](#) [1673B TIN100](#) [672525-001](#) [144517-000](#) [735A1-008-1000](#) [134655-000](#) [8212-010-U500](#) [480414-000](#) [7915A 009U1000](#) [5024A1311-0](#) [1281S5 010250](#) [1281S5 000250](#) [1530A 010U1000](#) [1505A 0081000](#) [9272 006U1000](#) [9248 010U1000](#) [7809WB 010500](#) [9244 0101000](#) [1694A 0081000](#) [1190A 0101000](#) [8241F J5C1000](#) [1674A TIN50](#) [7915A 0091000](#) [TRCH-50-2](#) [9066 0031000](#) [7805R 008100](#) [1674A TIN100](#) [9116SB 0101000](#) [1525A 0031000](#) [9271 0061000](#) [1613A 0101000](#) [1807A B591000](#) [5339Q5 009U500](#)