


## Formable microwave cable SUCOFORM\_86

### Description

Sucoform: Formstable, hand-formable alternatives to semi-rigid microwave cables  
RG403 dimension, 50 Ohm, 40 GHz, 165°C, ø2.1 mm, no jacket

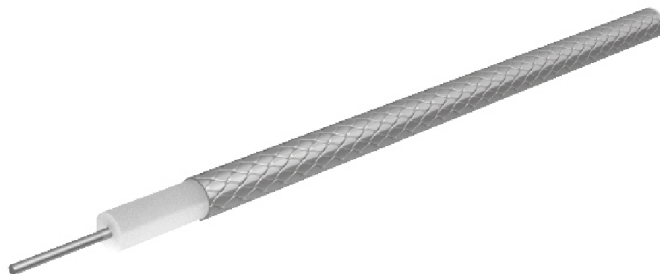

### Technical Data

#### Construction

	Material	Detail	Diameter
Centre conductor	Steel, Copper+Silver plated	Wire	0.53 mm
Dielectric	PTFE (Polytetrafluoroethylene)		1.65 mm
Outer conductor	Copper, Tin plated	Tin soaked braid, 100%	2.1 mm

Print: HUBER+SUHNER SUCOFORM 86 50 Ohm (PA no.)

#### Electrical Data

Impedance	50 Ω +/- 2
Operating Frequency	40 GHz
Capacitance	95 pF/m
Velocity of signal propagation	71 %
Signal delay	4.7 ns/m
Screening effectiveness	≥ 100 dB (up to 18 GHz)
Operating voltage	≤ 1.5 kV <sub>rms</sub> (at sea level)
Test voltage	3 kV <sub>rms</sub> (50 Hz/1 min)

#### Mechanical Data

Weight		1.5 kg/100 m
Min. bending radius	static	6 mm
	repeated (for ≤ 50 bendings)	20 mm

#### Environmental Data

Temperature range	-65 °C ... +165 °C
Installation temperature	-20 °C... +60 °C
Flame propagation test	IEC 60332-1, UL 1581 § 1080 (VW-1)
Halogen free	No
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant
1907/2006/EC (REACH)	compliant
2000/53/EC (ELV)	compliant
2012/19/EU (WEEE)	no special marking needed

### Additional Information

#### Ordering Information

Order as SUCOFORM\_86

#### Remarks

(For details refer to the HUBER+SUHNER RF CABLES GENERAL CATALOGUE or contact your nearest HUBER+SUHNER partner)

#### Suitable Connectors

Cable group Y16 2 mm / 50 Ohm

## Formable microwave cable SUCOFORM\_86

**Matrix** typical Attenuation [ formula:  $(a \cdot f^{0.5} + b \cdot f)$  ] and maximum Power CW [ formula:  $(p/f^{0.5})$  ]

Coefficients:

a = 0.6283	b = 0.04	$f_{max} = 40$	P at 1GHz = 162
------------	----------	----------------	-----------------

Frequency (GHz)	Nom. attenuation (dB / m) sea level 25° C ambient temperature	Nom. attenuation (dB / ft) sea level 25° C ambient temperature	Max. CW power (W) sea level 40° C ambient temperature
2,0	0,97	0,295	115
4,0	1,42	0,432	81
6,0	1,78	0,542	66
8,0	2,1	0,639	57
10,0	2,39	0,727	51
12,0	2,66	0,810	47
14,0	2,91	0,887	43
16,0	3,15	0,961	41
18,0	3,39	1,032	38
20,0	3,61	1,100	36
22,0	3,83	1,166	35
24,0	4,04	1,231	33
26,0	4,24	1,293	32
28,0	4,44	1,355	31
30,0	4,64	1,415	30
32,0	4,83	1,473	29
34,0	5,02	1,531	28
36,0	5,21	1,588	27
38,0	5,39	1,644	26
40,0	5,57	1,699	26

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Coaxial Cables](#) category:*

*Click to view products by [Huber & Suhner](#) manufacturer:*

Other Similar products are found below :

[89880-003-1000](#) [CY2389-000](#) [8221-010-U1000](#) [9116-010-U500](#) [1322R-010-1000](#) [1807A-B59-U1000](#) [2020K8421-9X-CS3417](#) [9251-010-1000](#) [9275-010-U1000](#) [935240-000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#) [144517-000](#) [735A1-008-1000](#) [8212-010-U500](#) [480414-000](#) [7915A 009U1000](#) [5024A1311-0](#) [1281S5 010250](#) [1530A 010U1000](#) [9248 010U1000](#) [9244 0101000](#) [1694A 0081000](#) [1190A 0101000](#) [8241F J5C1000](#) [1674A TIN50](#) [7915A 0091000](#) [TRCH-50-2](#) [9066 0031000](#) [7805R 008100](#) [1674A TIN100](#) [9116SB 0101000](#) [9271 0061000](#) [1613A 0101000](#) [1807A B591000](#) [5339Q5 009U500](#) [539945 0091000](#) [9116R 0101000](#) [89207 010100](#) [9058 0101000](#) [8241A 0101000](#) [DA7805R 0101000](#) [C6424](#)