

DBF31 THRU DBF310


SINGLE PHASE 3.0AMP SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

Features

- Glass Passivated Die Construction
- Low leakage
- Ideal for printed circuit board
- Surge overload rating-120A peak
- Designed for Surface Mount Application
- Plastic Material-UL Flammability 94V-0

Mechanical Data

- Case: DBF, molded plastic
- Terminals:Plated Leads Solderable per MIL-STD-202,Method208
- Polarity:As Marked on Case
- Mounting Position: Reference Mounting PAD Layout
- Marking:Type Number

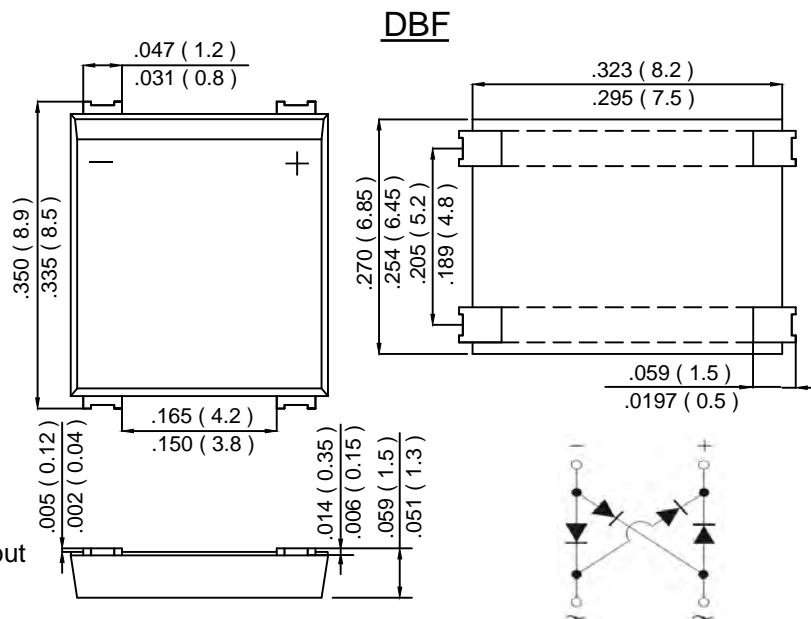

dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single Phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.







TYPE NUMBER	SYMBOL	DBF31	DBF32	DBF34	DBF36	DBF38	DBF310	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}							V
Working Peak Reverse Voltage	V_{RWM}	100	200	400	600	800	1000	
DC Blocking Voltage	V_{DC}							
RMS Reverse Voltage	V_{RMS}	70	140	280	420	560	700	V
Average Rectified Output Current (Note 1)@ $T_c=125^\circ C$	IF(AV)	3.0						A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	120						A
I^2t Rating for Fusing (t < 8.3ms)	I^2t	59.76						A ² s
Forward Voltage per element @ $I_F=1.5A$ @ $I_F=3.0A$	V_{FM}	0.95 1.0						V
Peak Reverse Current @ $T_J=25^\circ C$ At Rated DC Blocking Voltage @ $T_J=125^\circ C$	I_R	5.0 100						uA
Typical Junction Capacitance (Note 2)	C_J	30						pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	15						°C/W
	$R_{\theta JC}$	5						
Operating and Storage Temperature Range	T_J, T_{STG}	-55to+150						°C

Note: 1. Mounted on glass epoxy PC board with 1.3mm solder pad.

2. Measured at 1.0 MHz and applied reverse voltage² of 4.0V D.C.

3. Mounted on 15 mm*12 mm*1.6mmAL pad attach 195 mm*110 mm*10 mm steel plate For reference only

Characteristics Curve

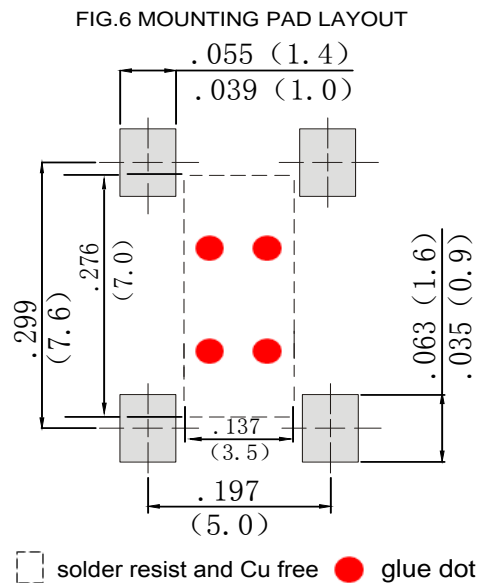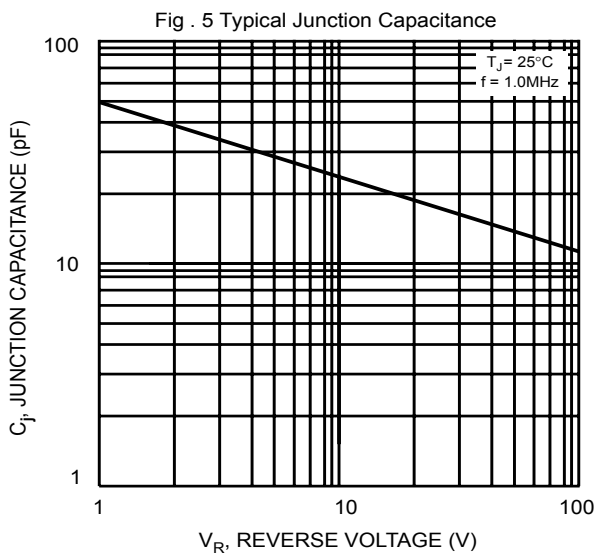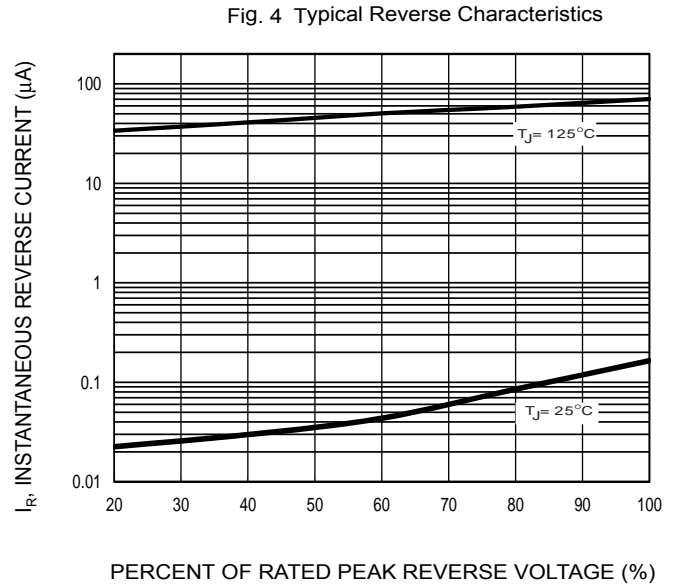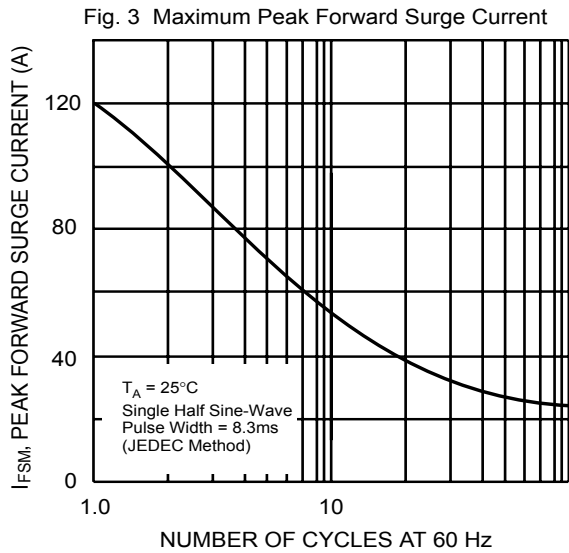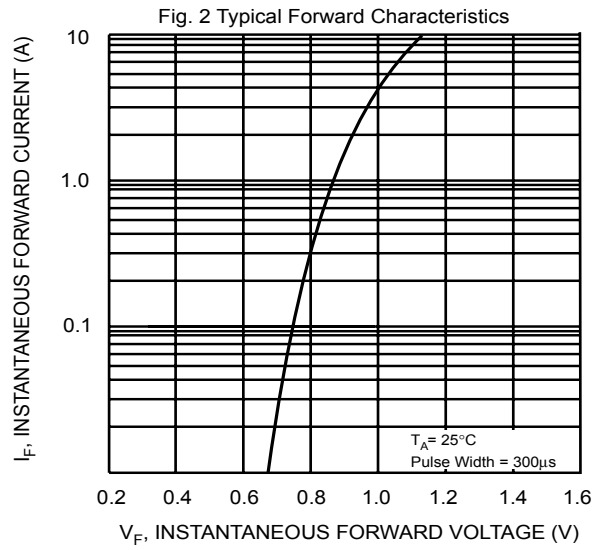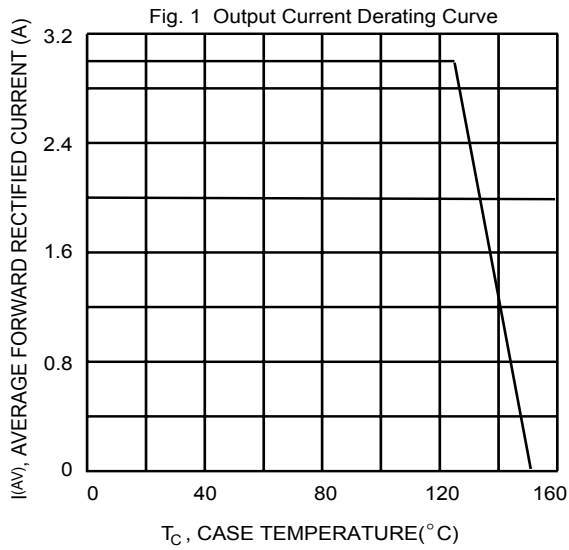

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Huixin](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#)
[GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#)
[G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#) [MB86](#)
[TL401G](#) [MDA920A2](#) [TU602](#) [TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#) [BU1010A-E3/51](#) [BU1508-E3/51](#)
[BU2008-E3/51](#) [US15KB80R-7000](#) [KBPC25-02](#) [VS-2KBB60](#) [VS-60MT120KPBF](#) [DB105-BP](#) [DF1510S](#)