

RHBS810


Glass Passivated Single-Phase 8.0Amp Fast Recovery Surface Mount Bridge Rectifier

Features

- Surface mount bridge, small package;
- Ideal for printed circuit boards;
- Glass passivated chip junction;
- High forward current capability up to 8.0A;
- High forward surge current capability;
- Fast recovery, low switching loss;
- Low profile package;
- Low forward voltage drop, low power losses;
- Plastic package has Underwrites Laboratory Flammability Classification 94V-0;

Mechanical Data

- Case: HBS;
- Epoxy meets UL-94V-0 Flammability rating;
- Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102;
- High temperature soldering guaranteed:
Solder Reflow 260°C, 10seconds;
- Polarity: As marked on body;
- Marking: Type number;

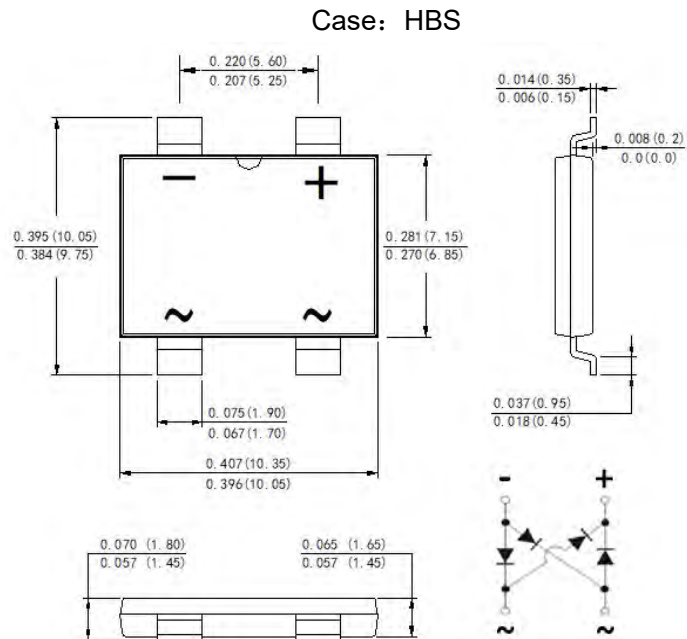

Dimensions in inches and (millimeters)

Typical Applications

General purpose use in AC-to-DC bridge full wave rectification for Fast Charging, Switching Power Supply, USB PD, Adapter and 3-in-1 Power Board, etc.

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Parameter	Symbol	RHBS810		Unit
Maximum repetitive peak reverse voltage	V_{RRM}	1000		V
Maximum RMS voltage	V_{RMS}	700		V
Maximum DC blocking voltage	V_{DC}	1000		V
Maximum average forward rectified output current at $T_A=25^\circ\text{C}$	$I_{F(AV)}$	8.0		Amps
Non-Repetitive Peak forward surge current 8.3 ms single sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	200		Amps
Rating for fusing ($t < 8.3\text{ms}$)	I^2t	166		A ² sec
Instantaneous forward voltage drop per diode	V_F	@ $I_F=1.0\text{A}$	0.85 Typ. 0.90 max.	Volt
		@ $I_F=4.0\text{A}$	0.96 Typ. 1.01 max.	
		@ $I_F=8.0\text{A}$	1.05 Typ. 1.10max.	
Reverse Current at Rated DC Blocking Voltage	I_R	$T_A=25^\circ\text{C}$	0.20 Typ. 5.0 max.	μA
		$T_A=125^\circ\text{C}$	50.0 Typ. 100 max.	
Maximum reverse recovery time ($I_F=0.5\text{A}, I_R=1.0\text{A}, t_{rr}=0.25\text{A}$)	T_{rr}	500		ns
Typical capacitance (note1)	C_j	45		pF
Typical thermal resistance	$R_{\theta J-A}$	70.0		$^\circ\text{C/W}$
	$R_{\theta J-C}$	15.0		
	$R_{\theta J-L}$	22.0		
Operating junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150		$^\circ\text{C}$

Note1: Measured at 1.0MHz and applied reverse voltage of 5.0V DC;

RHBS810

Glass Passivated Single-Phase 8.0Amp Fast Recovery Surface Mount Bridge Rectifier

Ratings and Characteristics Curves

(TA = 25°C unless otherwise noted)

FIG.1 Derating Curve Output Rectified Current

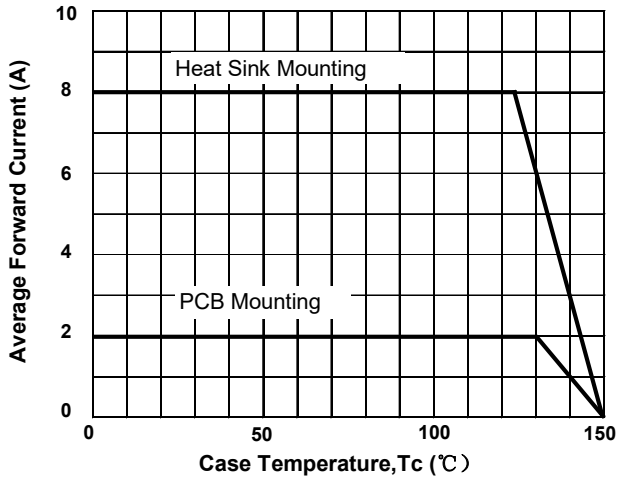


FIG.2 Typical Forward Characteristics per Diode

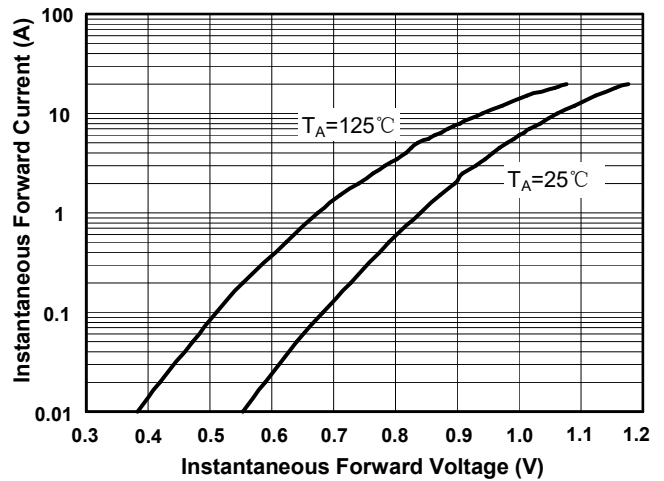


FIG.3 Maximum Non-Repetitive Peak Forward Surge Current per Diode

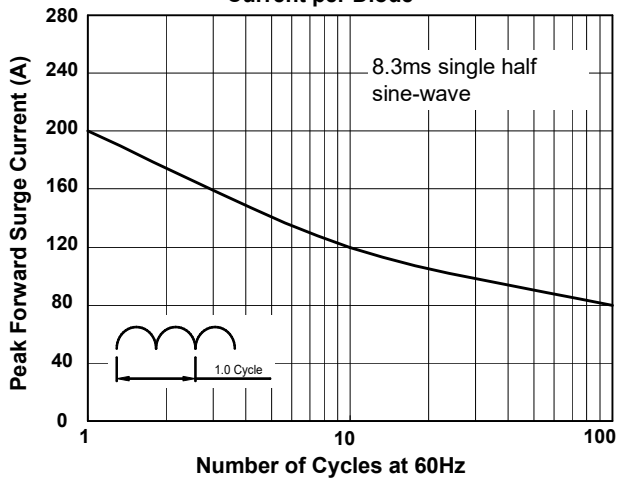


FIG.4 Typical Reverse Characteristics per Diode



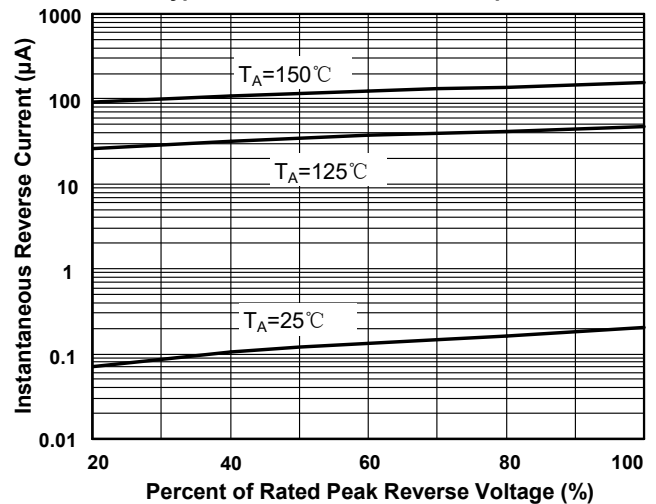


FIG.5 Typical Junction Capacitance per Diode

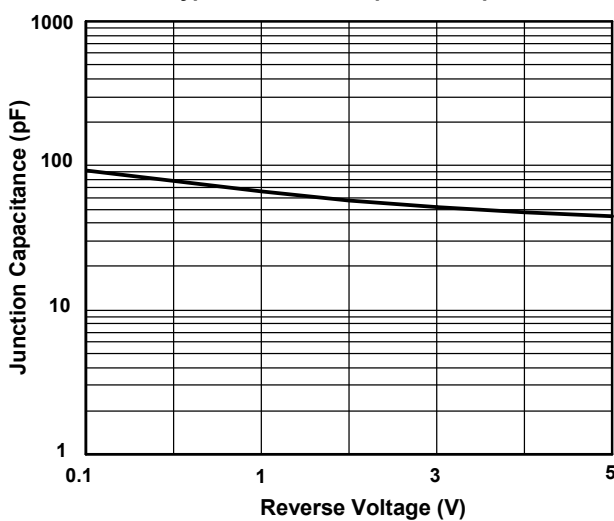

Suggested PCB printfoot layout

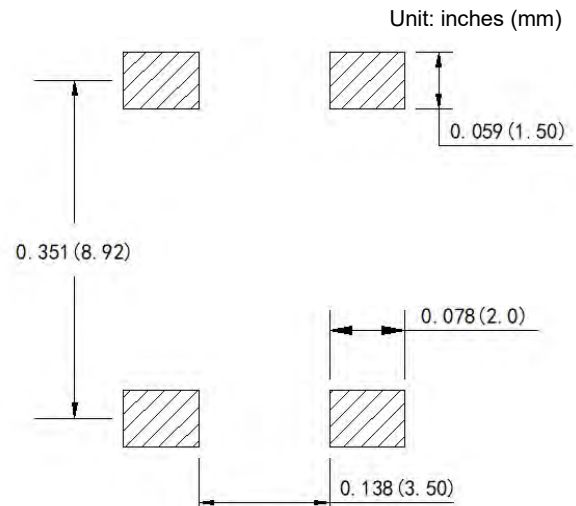

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [Huixin](#) manufacturer:

Other Similar products are found below :

[MB2510](#) [MB252](#) [MB356G](#) [MB358G](#) [MP358-BP](#) [90MT160KPBF](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#)
[GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DBA100G](#) [DBA150G](#) [DBA250G](#) [DBA40G](#) [DBD10G-TM-E](#) [DBF10G](#) [DBF250G](#)
[DBG150G](#) [DBG250G](#) [DF01](#) [DF10SA-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [KBPC50-10S](#) [RS405GL-BP](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#)
[GBU10J-BP](#) [GBU6M](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [TB102M](#) [MB1510](#) [MB6M-G](#) [MB86](#) [TL401G](#) [MDA920A2](#) [TU602](#)
[TU810](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BR84DTP204](#)