

参数表

HVP-16 高压二极管采用高可靠性的台面结构及扩散工艺，环氧树脂真空灌注密闭封装。

HVP-16 High voltage diode adopts high reliable mesa structure and diffusion craftwork, epoxy resin molded in a compact structure.

▼ 产品特点 Feature

- ❖ 雪崩电压击穿保护特性 **Avalanche Characteristic**
- ❖ 优异的抗浪涌电流冲击特性 **Excellent surge current resistance**
- ❖ 高速开关响应特性 **High speed switch response characteristics**
- ❖ 采用新型环氧树脂真空封装技术，表面具有抗腐蚀性
Epoxy resin molded in vacuum, have anticorrosion in the surface
- ❖ 工作结温 -50°C—+150°C **Tj:50°C—+150°C**
- ❖ 特殊耐高温性能芯片，可承受严酷恶劣的使用条件
Special high temperature resistant chip that can withstand harsh working

conditions

▼ 产品 2D 图示

Graphical Representation





	参数名称 Item	符号 Symbol	单位 Unit	测试条件 Conditions	数值 Rating
Absolute Maximum Ratings 极限值 (绝对最大值)	反向重复峰值电压 Repetitive Peak Reverse Voltage	V_{RRM}	KV	$T_a=25^{\circ}\text{C}$ $I_R=2.0\mu\text{A}$	16
	反向工作峰值电压) Peak Working Reverse Voltage	V_{RWM}	KV	$T_a=25^{\circ}\text{C}$ $I_R=2.0\mu\text{A}$	16
	正向平均电流 Average Forward Current	$I_{F(AV)}$	A	正弦半波 50Hz, 电阻负载, $T_{break}=50^{\circ}\text{C}$ (50Hz Half-sine Wave , Resistance load @ $T_{break}=50^{\circ}\text{C}$)	1.0
	反向恢复时间 Reverse Recovery Time	trr	nS		--
	正向(不重复)浪涌电流 Surge Forward Current	I_{FSM}	A	正弦半波持续时间 0.01S 50Hz 0.01S @ Half-Sine wave 50Hz	40
	工作环境温度 Operating Ambient Temperature	T_a	$^{\circ}\text{C}$		-40 ~ +150
	存储温度 Storage Temperature	T_{stg}	$^{\circ}\text{C}$		-40 ~ +120
Electrical Characteristics 电特性	正向峰值电压 Forward Peak Voltage	V_{FM}	V	@ $T_a=25^{\circ}\text{C}$ $I_f=1\text{A}$	20
	反向峰值电流 Peak Reverse Current	I_{RRM1}	μA	@ $T_a=25^{\circ}\text{C}$ $V_{RM}=V_{RRM}$	2.0
		I_{RRM2}	μA	@ $T_a=100^{\circ}\text{C}$ $V_{RM}=V_{RRM}$	20.0


▼外形尺寸图示 Outline Drawings (单位：毫米 mm)

图号/尺寸	Fig②
长(L)	80
宽(W)	20
高(H)	20
极距 (L1)	45
定位孔距(L2)	70
插片	8*15


Fig②

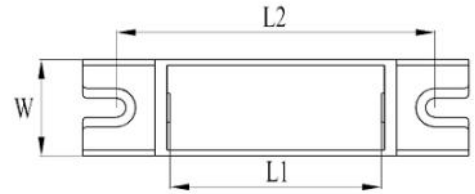


▼ 特性曲线图 Characteristic Curve

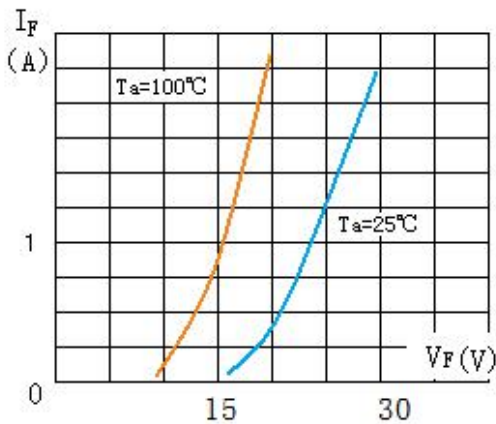

正向特性曲线 (HVP-16)
Forward Characteristics

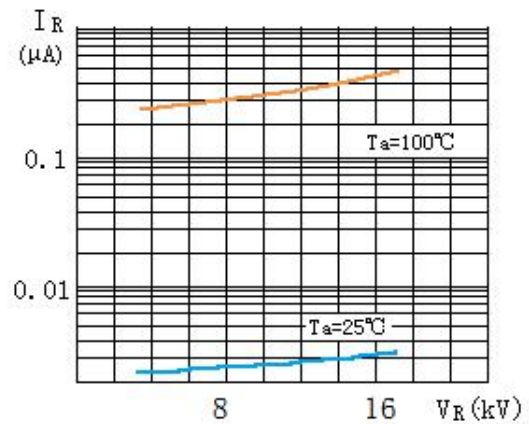

反向特性曲线 (HVP-16)
Reverse Characteristics

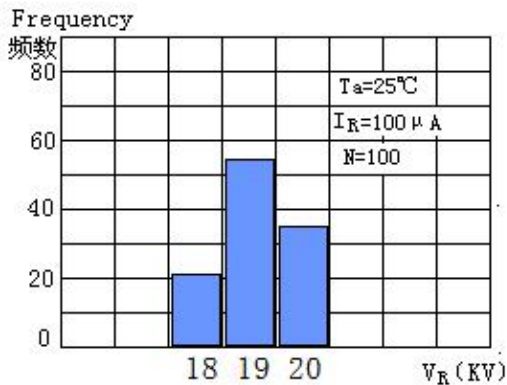

反向雪崩电压分布 (HVP-16)
Avalanche Breakdown Voltage Distribution

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [HVDIODE manufacturer](#):

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [HSC285TRF-E](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#)
[RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#)
[053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV199E6433HTMA1](#) [BAS28-7](#)
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#)
[BAV99HDW-13](#) [NTE6250](#) [NTE582-4](#) [NTE582-6](#)