


THB.387.C4A.R

TeePlug Panel mount 4 pole Screw terminal with male contacts + cable mount Socket, 7mm to 12mm cable diameter, 4 mm max conductor size IP68 17.5A 450V 1 cable entry, retail pack

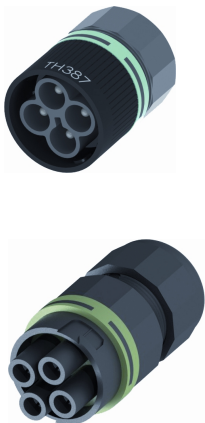

PRODUCT SPECIFICATIONS

Temperature "T" rating	T125
Minimum cable diameter (mm)	7 (5 with reducing adapter fitted)
Maximum cable diameter (mm)	12
Fixing system	Chassis / Cable
Cable entries	1 (+ cable entry to rear of chassis mount connector)
Number of poles	4
Terminal type	Screw
Body material	PA66
Max conductor size (Sq mm)	4
Max current (A)	17.5
Max voltage (V)	450
Minimum temp rating °C	-40
Max temp rating °C	125
IP rating	68

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [hylec manufacturer](#):

Other Similar products are found below :

[LN167001](#) [50.625 PA/3X7](#) [50.620 PA/R](#) [DESTB-1003](#) [THB.406.A1G](#) [THB.387.A4A.R](#) [K150-1032-00](#) [THB.380.3ASSY](#)
[GHG9601955R0004](#) [THB.381.M2A](#) [K151-1032-00](#) [HYKS-07612PP](#) [THB.382.A1A-KIT](#) [THB.390.A1AKIT](#) [THK.404.X2A00-F](#) [50.216 ES](#)
[50.616M/EMVDL-F](#) [50.625 ES](#) [PA244SKIT](#) [THB.387.A3A](#) [THB.405.A2A](#) [50.220 M-F](#) [HY435/12 FV](#) [THB110A6B-F](#) [50.216 M-F](#)
[THB.387.B5A](#) [5625////1121](#) [THB.405.A2G](#) [THA.209.A1A](#) [DESTB-1002](#) [THB.384.A1A](#) [K257-1012-00](#) [6000302CC](#) [TTK25BK-SD-F](#)
[TTK20GY-SD-F](#) [DESTB-0403](#) [THB.399.E3A-KIT](#) [50.625 PA/RSW](#) [HY508/3 V/3F](#) [5665/221](#) [THR.384.S3A](#) [THB.387.D4A](#) [THB.387.B4A](#)
[THR.405.S5A](#) [THB.387.A5A](#) [THB.387.C5A](#) [THB.387.D3A](#) [50.625 M/EMVDL-F](#) [THK.200.3T](#) [K160-1040-00](#)