

客户

CUSTOMER: _____

NA CHUAN ELECTRONICS CO.,LTO

承 認 書

SPECIFICATION FOR APPROVAL

Hyncdz[®]


產品名稱：铝电解电容器
 客戶物料編號：
 承制方型號：CD288 16V680μF 8X16
 日期：
 物料环保标准： ROHS



承制方確認

| 拟制 | 审核 | 批准 |
|-----|----|-----|
| 姚海洋 | | 涂斯淇 |

使用方確認

| | 审核 | 批准 |
|---|----|----|
|  | | |

承制方：
 地 址：
 電 話：
 傳 真：
 郵 編：

签认后, 敬请返回一份, 多谢!

1、概述 SCOPE

本承认书规定了径向引出铝电解电容器的技术规范.

This specification covers miniature single-ended aluminum electrolytic capacitors.

2、参考标准 APPLICABLE SPECIFICATION

本承认书参考 JIS C5141 制定.

JIS C5141 Characteristics as specified in this specification.

3、工作温度范围 OPERATING TEMPERATURE RANGE

工作温度范围是电容器在施加额定工作电压条件下,可以长期可靠工作的环境温度范围.

$$-40\sim+105^{\circ}\text{C}(\leq 100\text{V}) \quad -25\sim+105^{\circ}\text{C}(\geq 160\text{V})$$

Operating temperature range is the range of ambient temperature at which the capacitor can be operated continuously at rated voltage.

$$-40\sim+105^{\circ}\text{C}(\leq 100\text{V}) \quad -25\sim+105^{\circ}\text{C}(\geq 160\text{V})$$

4、品质保证项目 CONTENTS OF QUALITY ASSURANCE

4.1、如果没有其他规定,标准的测试、检验环境条件如下所示:

环境温度: 15 至 35°C

相对湿度: 45 至 75%

大气压力: 86Kpa 至 106Kpa

如果对测试结果有异议,可以在以下条件测试:

环境温度: $20\pm 2^{\circ}\text{C}$

相对湿度: 60 至 70%

大气压力: 86Kpa 至 106Kpa

Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests are as follows.

Ambient temperature : 15 to 35°C

Relative humidity : 45 to 75%

Air pressure : 86kpa to 106kpa

If there may be doubt on the results, measurements shall be made within the following limits.

Ambient temperature : $20\pm 2^{\circ}\text{C}$

Relative humidity : 60 to 70%

Air pressure : 86Kpa to 106Kpa

铝电解电容器使用注意事项

IMPORTANT INFORMATION ON THE APPLICATION OF ALUMINUM ELECTROLYTIC CAPACITORS

- (1). 直流铝电解电容应按正确的极性使用 DC electrolytic capacitors are polarized

当直流铝电解电容器按反极性接入电路时，电容器会导致电子线路短路，由此产生的电流会引致电容器损坏。若电路中有可能在负引线施加正极电压，请选无极性产品。

When reverse voltage is applied on DC electrolytic capacitor, the capacitor will become short-circuited please use no polarized capacitors in the circuit be damage due to abnormal current flows through the capacitors since the circuit where the positive voltage may be applied to the cathode terminal.

- (2). 在额定工作电压以下作用 Use capacitor within rated voltage

当电容器上所施加电压高于额定工作电压时，电容器的漏电流将上升，其电气特性将在短时间内劣化直至损坏。请注意电压峰值勿超出额定工作电压。

When capacitor is used at higher voltage than the rated voltage, leakage current increases, characteristics drastically deteriorate and damage in a short period may occur as a result. Please take extra caution that the peak voltage should not exceed the rated voltage.

- (3). 作快速充放电使用 Charge and discharge application.

当常规电容器被用作快速充电用途。其使用寿命可能会因为容量下降，温度急剧上升等而缩减。

When aluminum electrolytic capacitors for general purpose are employed in rapid charge and discharge application, its life expectancy may be shortened by capacitance decrease, heat rise, etc.

- (4). 电容器贮存 Store the capacitor.

当铝电解电容器作了长期贮存后，其漏电流通常升高，贮存温度愈高，漏电流上升愈快。因此应注意贮存环境的选择，在电容器上施加电压后，漏电流值将不断下降，在铝电解电容器的漏电流值上升对电路有不良影响的，请在使用前充电处理。

Increased leakage current is common in aluminum capacitors which have been stored for long period of time. The Higher the storage temperature, the higher the leakage current decreases gradually as voltage is applied to the capacitor. In cases where increased leakage current causes problems in the circuit, apply voltage (aging) before using.

- (5). 施加纹波电流应少于额定值 Ripple current applied to capacitor should not exceed the rated value.

施加纹波电流超过额定值后，会导致电容器体过热，容量下降，寿命缩短。所施加纹波电压的峰值应少于额定工作电压。

Excessive heat will reduce capacitance and result in shortened life of capacitor if ripple currents exceeding the specified rated value are applied. The peak value of the ripple voltage should be less than the rated voltage.

- (6). 使用环境温度 Ambient temperature.

铝电解电容器的使用寿命会受到环境温度的影响。据科学统计，使用环境温度下降 10℃ 其使用寿命

命增加 1 倍。

The ambient temperature affects life of the aluminum electrolytic capacitor. It is generally stated, that life doubles for each 10°C decrease in temperature.

(7). 引出线强度 Lead stress

当拉力施加到电容器引出线，该拉力将作用于电容器内部，这将导致电容器内部短路，开路或漏电流上升。在电容器焊装到电路板，请勿强烈摇动电容器。

When a strong force is applied to the lead wires or terminals, stress is put on the internal connections. This may result in short circuit, open circuit or increased leakage current. It is not advisable to bend or handle a capacitor after it has been soldered to the PC board.

(8). 焊接过程耐热性 Heat resistance at the soldering process

铝电解电容器装至电路板进行浸焊或波焊时，其塑料套管可能因焊接时间过长、温度过高而发生破裂或二次收缩。


In the dip soldering process of PC board with aluminum electrolytic capacitors mounted, secondary shrinkage or crack of PVC sleeve may be observed when solder temperature is too high or dipping time is too long.

(9). 电路板的安装孔孔距及安装位置 Hole pitch and position of PC board.

电路板安装孔的设计应与产品说明书的引线脚距相一致，如果将电容器强行插入孔距不配套的电路板，那么会有应力作用于引出线，这将导致短路或漏电流上升。

A PC board must be designed so its hole pitch coincides with the lead pitch (lead spacing) of the capacitor specified by the catalog or specifications. When a capacitor is forcibly inserted into an unmatched hole pitch, a stress is put on the leads This could result in a short circuit or increased leakage current.

产品结构图

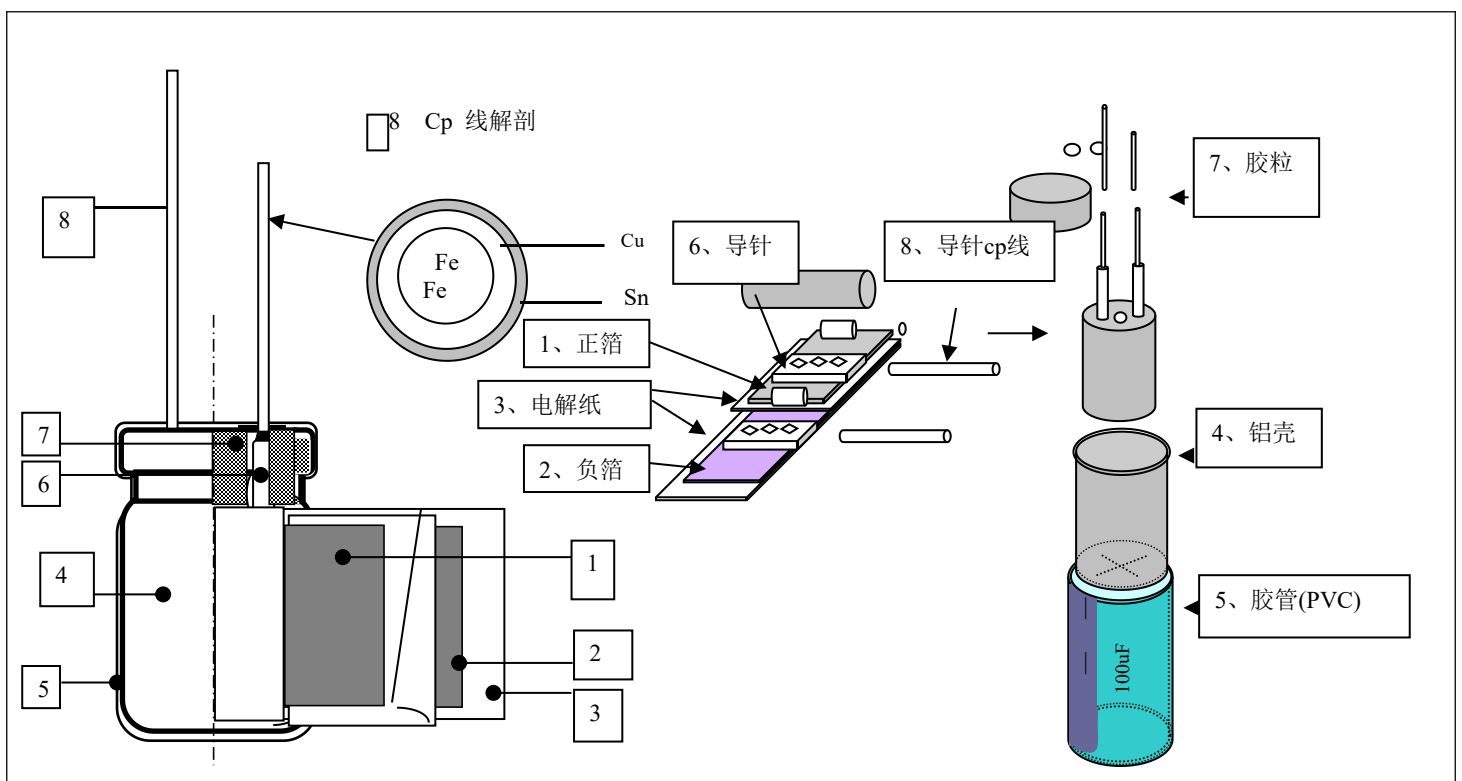

ALUMINIUM ELECTROLYTIC CAPACITOR

铝电解电容器

COMPOSITION LIST(物质成份表)

| MATERIALS (材料名称) | | COMPOSITION OF MATERIALS (材料成分表) | | | | | |
|--|-------|---|--------|-----------------|-------|--------|--------|
| SLEEVE TUBE (套管) | | POLYETHYLENE TEREPHTHALATE PET (PVC 聚对苯二甲酸乙二酯) | 90% | | | | |
| | | STABILILER (稳定剂) | 0.2% | | | | |
| | | 润滑剂 (LUBRICANT) | 0.15% | | | | |
| | | 颜料 (PIGMENT) | 1.0% | | | | |
| RUBBER (胶粒) | | 强韧剂 (TOUGHENER) | 8.65% | | | | |
| | | EPDM(三元乙丙胶) | 40% | | | | |
| | | CLAY(白土) | 45% | | | | |
| | | CARBON(碳烟) | 9.0% | | | | |
| OTHER(其它) | | | 6.0% | | | | |
| | | LEAD WIRE (导针) | | AL-WIRE (铝线) | | AL (铝) | 99.91% |
| | | | | | | Si (硅) | 0.03% |
| | | | | | | Fe 铁) | 0.05% |
| Cu (铜) | 0.01% | | | | | | |
| TIN PLATED COPPER COVERED SLEEL WIRE(镀锡铜包钢线) | | Fe (铁) | 71.35% | | | | |
| | | Cu (铜) | 20% | | | | |
| | | Sn (锡) | 8.65% | | | | |
| | | AL-CASE(铝壳) | | AL (铝) | 99.3% | | |
| Cu (铜) | 0.20% | | | | | | |
| Mn (锰) | 0.20% | | | | | | |
| Zn (锌) | 0.20% | | | | | | |
| OTHER(其它) | 0.1% | | | | | | |
| ALUMINUM FOIL(铝箔) | | AL (铝) | 99.98% | | | | |
| | | Al_2O_3 (三氧化二铝) | 0.02% | | | | |
| PAPER(电解纸) | | CELLULOSE (纸纤维素) | 100% | | | | |
| ELECTROLYTE(电解液) | | ETHYL GLYCL(乙二醇) | 50% | | | | |
| | | AMMONIUM ADIPATE(己二酸铵) | 机密 | | | | |
| | | ADIPIC ACID(己二酸) | 机密 | | | | |
| | | AMMOUIUN BENZOATE(安息香酸铵) | 机密 | | | | |
| | | CITRIC ACID(柠檬酸) | 机密 | | | | |
| | | PARA-NITORO BENZOIE ACID (对硝基安息香酸) | 机密 | | | | |
| | | AMMDIHYDROGEN PHOSPHLATE (磷酸二氰氨) | 机密 | | | | |
| | | PURE WATER 、 AMMONIUM ACETATE (纯水、甲酸铵) | 机密 | | | | |

CD288 (G) Series

CD288G 系列 105℃ 低阻抗品


特点

- ◆ 适用于通信设备、开关电源、工业测量仪器等电路中。
- ◆ 105℃ 负荷寿命达5000小时。
- ◆ 安全防爆阀设计。

CD288G Series Low Impedance Features

- ◆ Used in communication equipments、switching power supply Industrial measuring instruments ,etc.
- ◆ Load life 5000 hours at 105℃.
- ◆ Safety vent construction design .

技术要求 Specifications

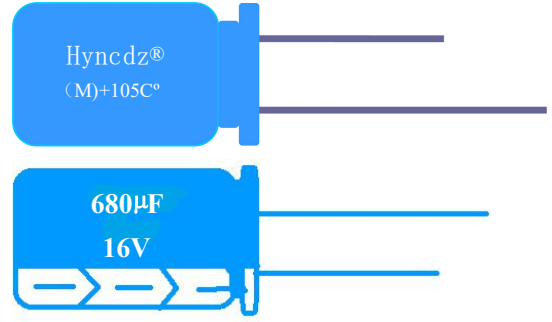

| 项目Item | 特性Performance Characteristics | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|---|---------------------------|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------------|----|----|----|---|---|---|---|---|----|----|----|----|----|-----------------|---|---|---|---|---|---|---|---|--|--|--|--|--|
| 使用温度范围 Operating Temperature Range | -40to+105℃ | -25to+105℃ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 额定电压范围 Rated Voltage Range | 10to100VDC | 160to400VDC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 电容量范围 Capacitance Range | 0.47to4700 µ F | 0.47to220 µ F | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 电容量允差 Capacitance Tolerance | ±20% (100Hz or 120 Hz, +20℃) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 漏电流Leakage Current (+20℃, 最大max) | I ≤ 0.01CV 或 2 (µ A) 额定工作电压充电2分钟后读数, 取大者 After 2 minutes, whichever is greater measured with rated working voltage applied | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 损耗角正切值 Dissipation Factor (tg δ) | <table border="1"> <tr> <td>工作电压Working Voltabe (VDC)</td> <td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td><td>120</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td> </tr> <tr> <td>D.F.(%)最大</td> <td>14</td><td>12</td><td>10</td><td>9</td><td>8</td><td>8</td><td>8</td><td>8</td><td>12</td><td>12</td><td>12</td><td>15</td><td>15</td> </tr> </table> | | 工作电压Working Voltabe (VDC) | 16 | 25 | 35 | 50 | 63 | 80 | 100 | 120 | 160 | 200 | 250 | 350 | 400 | D.F.(%)最大 | 14 | 12 | 10 | 9 | 8 | 8 | 8 | 8 | 12 | 12 | 12 | 15 | 15 | | | | | | | | | | | | | | |
| | 工作电压Working Voltabe (VDC) | 16 | 25 | 35 | 50 | 63 | 80 | 100 | 120 | 160 | 200 | 250 | 350 | 400 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D.F.(%)最大 | 14 | 12 | 10 | 9 | 8 | 8 | 8 | 8 | 12 | 12 | 12 | 15 | 15 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 容量>1000 µ F时, 每增加1000 µ F D.F值增加2%(100Hz or 120Hz, +20℃) For capacitance 1000 µ F, Add 2% per another 1000 µ F (100Hz or 120Hz, +20℃) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 低温特性 Low Temperature Characteristics (120Hz) | 阻抗比, 最大 Impedance ratio ,max | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <tr> <td>工作电压Working Voltage(VDC)</td> <td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>80</td><td>100</td><td>120</td><td>160</td><td>200</td><td>250</td><td>350</td><td>400</td> </tr> <tr> <td>Z - 25℃ / Z+20℃</td> <td>3</td><td>3</td><td>3</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>3</td><td>5</td><td>5</td> </tr> <tr> <td>Z - 40℃ / Z+20℃</td> <td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td><td></td><td></td><td></td><td></td><td></td> </tr> </table> | | 工作电压Working Voltage(VDC) | 16 | 25 | 35 | 50 | 63 | 80 | 100 | 120 | 160 | 200 | 250 | 350 | 400 | Z - 25℃ / Z+20℃ | 3 | 3 | 3 | 3 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 5 | 5 | Z - 40℃ / Z+20℃ | 4 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | | | | | |
| | 工作电压Working Voltage(VDC) | 16 | 25 | 35 | 50 | 63 | 80 | 100 | 120 | 160 | 200 | 250 | 350 | 400 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Z - 25℃ / Z+20℃ | 3 | 3 | 3 | 3 | 2 | 2 | 2 | 2 | 2 | 2 | 3 | 5 | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Z - 40℃ / Z+20℃ | 4 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 容量>1000 µ F时, 每增加1000 µ F, Z - 25℃ / Z+20℃ 值增加0.5%, Z - 40℃ / Z+20℃ 值增加1% For capacitance > 1000 µ F, and 0.5% per another 1000 µ F for Z-25℃/Z+20℃, add 1% per another 1000 µ F for Z-40℃/Z+20℃ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 负荷寿命Load Life | 试验条件 持续时间: 负荷寿命 5000h | Test conditions Duration time: LoadLife 5000h | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 环境温度:+105℃ | Ambient temperature: +105℃ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 施加电压:额定工作电压(VDC) | Applied voltage: Rated Working Voltage(DVC) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 试验后要求:室温下恢复16小时,+20℃测试 | After test requirements: Resumde 16 hours at normal temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 电容量变化:≤±25%规定值 | Capacitance change:≤±25% of the initial measured value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 损耗角正切值:≤200%初始值 | Dissipation Factor:≤200% of the initial specified value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 漏电流:≤规定值 | Leakage Current:≤The initial specified value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 储存寿命Shelt Life | 试验条件 | Test conditions | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 持续时间:500小时 | Duration time: 500hours | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 环境温度:+105℃ | Ambient temperature:+105℃ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 施加电压:无 | Applied voltage: None | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 试验后要求:室温下恢复16小时,+20℃测试 | After test requirements: Resumed 16 hours at normal temperature | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 电容量变化:≤±20%规定值 | Capacitance change:≤±20% of the initial measured value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 漏电流:≤200%规定值 | Leakage Current:≤200% of the initial specified value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

CD288 (G) Series

纹波电流频率调整系数

Multiplier for ripple current vs. frequency


| 容量 (μF) / Hz | | 60(50) | 120 | 400 | 1K | 10K | 50K~100K |
|--------------|----------|--------|------|------|------|------|----------|
| 系数 | ≤10 | 0.47 | 0.59 | 0.76 | 0.85 | 0.97 | 1 |
| | 10~100 | 0.52 | 0.62 | 0.80 | 0.89 | 0.97 | 1 |
| | 100~1000 | 0.58 | 0.72 | 0.84 | 0.90 | 0.98 | 1 |
| | >1000 | 0.63 | 0.78 | 0.87 | 0.91 | 0.98 | 1 |

纹波电流温度调整系数

Multiplier for ripple current vs. temperature

| 温度℃ | 45 | 60 | 75 | 85 | 105 |
|-----|------|------|------|------|------|
| 系数 | 2.10 | 1.90 | 1.40 | 1.25 | 1.00 |

尺寸图Diagram of Dimension (≥DΦ8以上设有防爆阀)

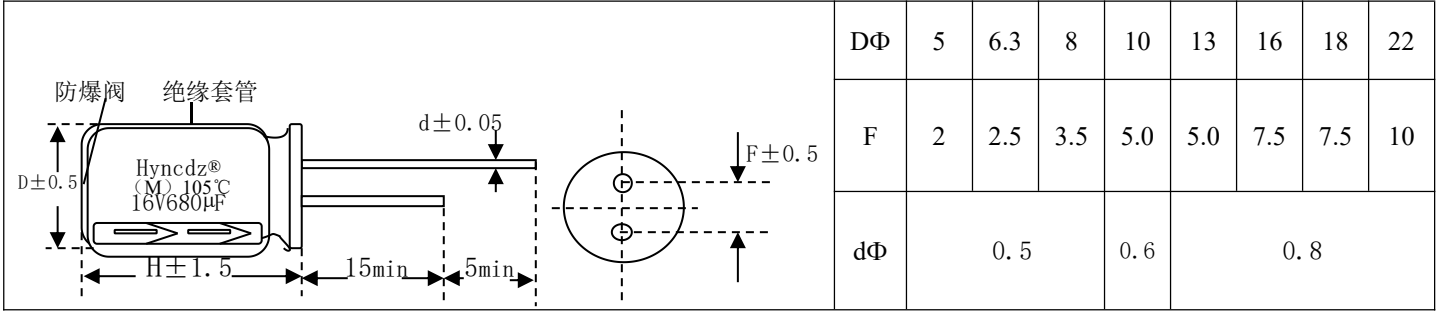

套管标识说明: (其它类同)

| | | | | | | |
|---------|----------|------|-------|------|-------|------|
| Hyncdz® | ±20% | 105℃ | 680UF | 16V | CD288 | 套管颜色 |
| 商标 | (M) 容值偏差 | 使用温度 | 标称容量 | 工作电压 | 高频低阻 | 棕底白字 |

尺寸表 Case Size

D x L(mm)

| WV (SV) μF | 16 | | | 25 | | | 35 | | | 50 | | |
|---------------|--------|--------|-----------|--------|--------|-----------|--------|--------|-----------|--------|--------|-----------|
| | Size | Ripple | Impedance | Size | Ripple | Impedance | Size | Ripple | Impedance | Size | Ripple | Impedance |
| 1 | | | | | | | | | | 5x11 | 40 | 4.00 |
| 2.2 | | | | | | | | | | 5x11 | 55 | 2.80 |
| 3.3 | | | | | | | | | | 5x11 | 60 | 2.20 |
| 4.7 | | | | | | | | | | 5x11 | 90 | 2.00 |
| 10 | | | | 5x11 | 85 | 2.56 | 5x11 | 105 | 2.37 | 5x11 | 120 | 1.82 |
| 22 | | | | 5x11 | 125 | 1.95 | 5x11 | 150 | 1.50 | 5x11 | 135 | 1.35 |
| 33 | 5x11 | 100 | 2.60 | 5x11 | 155 | 1.42 | 5x11 | 180 | 1.21 | 5x11 | 250 | 0.80 |
| 47 | 5x11 | 114 | 2.00 | 5x11 | 205 | 1.1 | 5x11 | 280 | 0.80 | 6.3x12 | 280 | 0.65 |
| 68 | 5x11 | 155 | 1.10 | 6.3x12 | 280 | 0.65 | 6.3x12 | 350 | 0.52 | 6.3x12 | 375 | 0.33 |
| 100 | 5x11 | 195 | 0.69 | 6.3x12 | 320 | 0.35 | 6.3x12 | 450 | 0.25 | 8x12 | 480 | 0.17 |
| 120 | 5x11 | 265 | 0.50 | 6.3x12 | 380 | 0.33 | 8x12 | 510 | 0.220 | 10x13 | 530 | 0.156 |
| 150 | 6.3x12 | 270 | 0.47 | 8x12 | 410 | 0.31 | 8x12 | 540 | 0.191 | 10x13 | 590 | 0.132 |
| 220 | 6.3x12 | 290 | 0.41 | 8x12 | 550 | 0.25 | 8x12 | 750 | 0.114 | 10x13 | 930 | 0.096 |
| 330 | 6.3x12 | 400 | 0.25 | 8x12 | 820 | 0.114 | 8x16 | 1050 | 0.079 | 10x17 | 1150 | 0.065 |
| 470 | 8x12 | 590 | 0.156 | 8x12 | 1200 | 0.076 | 10x17 | 1200 | 0.065 | 10x20 | 1590 | 0.055 |
| 680 | 8x16 | 750 | 0.124 | 10x17 | 1320 | 0.065 | 10x20 | 1570 | 0.056 | 13x21 | 1930 | 0.044 |
| 1000 | 8x16 | 1100 | 0.092 | 10x17 | 1450 | 0.055 | 10x20 | 1800 | 0.032 | 13x25 | 2300 | 0.036 |
| | 10x17 | 1350 | 0.065 | 10x20 | 1650 | 0.045 | 13x21 | 1900 | 0.042 | 16x25 | 2400 | 0.046 |
| 1500 | 10x20 | 1350 | 0.065 | 13x21 | 2210 | 0.038 | 13x25 | 2270 | 0.036 | 16x30 | 2750 | 0.034 |
| 2200 | 10x20 | 1630 | 0.056 | 13x21 | 2650 | 0.036 | 16x25 | 2850 | 0.034 | 16x30 | 3040 | 0.032 |
| 3300 | 13x21 | 2000 | 0.038 | 16x26 | 3240 | 0.026 | 16x30 | 3100 | 0.026 | 18x36 | 3100 | 0.025 |
| 4700 | 13x25 | 2790 | 0.033 | 16x25 | 3650 | 0.024 | 18x30 | 3500 | 0.024 | | | |
| 6800 | 16x25 | 2880 | 0.026 | 16x30 | 3850 | 0.024 | | | | | | |

Ripple Current(mA,rms)at 105℃ 100KHZ

Max Impedance (Ω)at 25℃ 100KHZ

CD288 (G) Series

尺寸表 Case Size

D x L(mm)

| WV (SV) μ F | 63 | | | 80 | | | 100 | | | 120 | | |
|----------------|--------|--------|-----------|--------|--------|-----------|--------|--------|-----------|--------|--------|-----------|
| | Size | Ripple | Impedance | Size | Ripple | Impedance | Size | Ripple | Impedance | Size | Ripple | Impedance |
| 2.2 | 5x11 | 45 | 2.80 | 5x11 | 42 | 3.30 | 5x11 | 42 | 3.30 | 5x11 | 42 | 3.30 |
| 3.3 | 5x11 | 58 | 2.20 | 5x11 | 56 | 2.40 | 5x11 | 55 | 2.80 | 5x11 | 55 | 2.80 |
| 4.7 | 5x11 | 65 | 2.00 | 5x11 | 68 | 2.20 | 5x11 | 72 | 2.60 | 5x11 | 72 | 2.60 |
| 10 | 5x11 | 110 | 1.75 | 6.3x12 | 120 | 1.76 | 6.3x12 | 130 | 1.77 | 6.3x12 | 130 | 1.77 |
| 22 | 6.3x12 | 240 | 0.80 | 6.3x12 | 230 | 0.85 | 6.3x12 | 220 | 0.85 | 6.3x12 | 220 | 0.85 |
| 33 | 6.3x12 | 270 | 0.61 | 10x13 | 290 | 0.69 | 8x12 | 320 | 0.69 | 10x13 | 320 | 0.69 |
| 47 | 6.3x12 | 300 | 0.56 | 8x12 | 300 | 0.69 | 8x12 | 320 | 0.69 | 10x14 | 370 | 0.58 |
| | 8x12 | 300 | 0.56 | 10x17 | 320 | 0.58 | 10x13 | 340 | 0.58 | | | |
| 68 | 8x14 | 480 | 0.41 | 10x13 | 475 | 0.35 | 10x17 | 470 | 0.35 | 10x17 | 470 | 0.35 |
| 100 | 8x12 | 500 | 0.40 | 10x17 | 510 | 0.34 | 10x17 | 510 | 0.33 | 13x21 | 560 | 0.30 |
| | 8x16 | 520 | 0.20 | 10x20 | 580 | 0.30 | 10x20 | 560 | 0.30 | | | |
| 120 | 10x15 | 620 | 0.125 | 10x20 | 640 | 0.22 | 10x20 | 580 | 0.28 | 13x21 | 660 | 0.22 |
| 150 | 10x20 | 700 | 0.111 | 13x21 | 740 | 0.174 | 10x20 | 680 | 0.21 | 13x21 | 780 | 0.174 |
| 220 | 10x17 | 800 | 0.120 | 13x21 | 920 | 0.13 | 13x21 | 800 | 0.16 | 16x25 | 780 | 0.16 |
| | 10x20 | 920 | 0.110 | 13x25 | 1050 | 0.110 | 13x25 | 880 | 0.13 | 16x32 | 880 | 0.13 |
| 330 | 10x20 | 1250 | 0.105 | 13x21 | 1100 | 0.12 | 13x25 | 920 | 0.13 | 16x25 | 950 | 0.13 |
| | | | | 13x25 | 1200 | 0.10 | 16x25 | 1440 | 0.10 | 16x32 | 1440 | 0.10 |
| 470 | 13x21 | 1300 | 0.100 | 16x22 | 1310 | 0.10 | 16x27 | 920 | 0.13 | 16x36 | 1650 | 0.09 |
| | 13x25 | 1620 | 0.093 | 16x25 | 1430 | 0.09 | 18x25 | 1650 | 0.09 | 18x25 | 1650 | 0.09 |
| 680 | 13x25 | 1950 | 0.090 | 18x30 | 1860 | 0.08 | 18x36 | 1790 | 0.080 | 18x41 | 1790 | 0.080 |
| 1000 | 16x25 | 2050 | 0.090 | 18x25 | 1550 | 0.09 | | | | | | |
| | 16x32 | 2350 | 0.074 | 18x30 | 1620 | 0.08 | | | | | | |
| 1500 | 18x30 | 2710 | 0.061 | | | | | | | | | |
| 2200 | 18x36 | 2850 | 0.060 | | | | | | | | | |
| 3300 | | | | | | | | | | | | |

| WV (SV) μ F | 160 | | | 200 | | | 250 | | | 400 | | |
|----------------|--------|--------|-----------|--------|--------|-----------|--------|--------|-----------|--------|--------|-----------|
| | Size | Ripple | Impedance | Size | Ripple | Impedance | Size | Ripple | Impedance | Size | Ripple | Impedance |
| 1 | | | | | | | 6.3x12 | 50 | 6.54 | 6.3x12 | 36 | 16.5 |
| 2.2 | 6.3x12 | 55 | 5.21 | 6.3x12 | 55 | 5.18 | 6.3x12 | 72 | 4.12 | 8x12 | 65 | 9.58 |
| 3.3 | 6.3x12 | 70 | 4.31 | 8x12 | 71 | 4.25 | 8x12 | 75 | 3.85 | 8x12 | 86 | 5.01 |
| 4.7 | 6.3x12 | 72 | 4.16 | 8x12 | 85 | 4.12 | 8x12 | 100 | 2.95 | 8x12 | 120 | 4.82 |
| 5.6 | 8x12 | 91 | 3.61 | 8x12 | 92 | 3.55 | 8x12 | 105 | 2.72 | 8x12 | 130 | 4.81 |
| 6.8 | 8x12 | 100 | 3.12 | 8x12 | 115 | 2.71 | 8x12 | 140 | 1.86 | 8x12 | 160 | 3.55 |
| 10 | 10x13 | 100 | 2.69 | 10x16 | 132 | 2.02 | 10x17 | 160 | 1.4 | 10x17 | 245 | 3.32 |
| 22 | 10x17 | 205 | 1.30 | 10x17 | 205 | 1.20 | 10x17 | 185 | 1.3 | 13x21 | 305 | 2.65 |
| 33 | 10x20 | 260 | 1.10 | 13x20 | 330 | 0.62 | 13x21 | 260 | 0.9 | 16x21 | 335 | 1.21 |
| 47 | 13x20 | 320 | 0.91 | 13x20 | 400 | 0.51 | 13x21 | 405 | 0.45 | 16x25 | 560 | 0.92 |
| 68 | 13x20 | 410 | 0.56 | 13x20 | 540 | 0.35 | 13x25 | 490 | 0.38 | 18x25 | 750 | 0.75 |
| 82 | 13x21 | 460 | 0.51 | 16x25 | 620 | 0.26 | 16x25 | 570 | 0.32 | 18x25 | 860 | 0.63 |
| 100 | 13x21 | 500 | 0.47 | 16x25 | 700 | 0.19 | 16x25 | 675 | 0.25 | 18x30 | 950 | 0.52 |
| 120 | 16x25 | 520 | 0.35 | 16x30 | 820 | 0.17 | 16x30 | 730 | 0.24 | 18x30 | 1150 | 0.34 |
| 150 | 16x25 | 660 | 0.26 | 16x30 | 840 | 0.16 | 18x30 | 750 | 0.23 | 18x35 | 1350 | 0.22 |
| 220 | 16x25 | 660 | 0.26 | 18x30 | 1080 | 0.14 | 18x30 | 910 | 0.20 | | | |
| 330 | 18x32 | 910 | 0.18 | | | | | | | | | |

Ripple Current(mA,rms)at 105°C 100KHZ

Max Impedance (Ω) at 25°C 100KHZ

| 检验项目 | 检验标准 | AQL | | 不良数 | 不良原因 | 判定 |
|---------------|-------------------------------|-----|----|-----|------|----|
| | | Ac | Re | | | |
| 外观检查 | 外观无异常、标志清晰、无可见损伤、尺寸符合《尺寸图》要求 | 0 | 1 | 0 | / | OK |
| 静电容量 (C) | 544~816 μ F | 0 | 1 | 0 | / | OK |
| 损失角正切值(DF) | $\leq 14\%$ | 0 | 1 | 0 | / | OK |
| 漏电流 (充电 2 分钟) | $\leq 108.8 \mu$ A | 0 | 1 | 0 | / | OK |
| 外套绝缘电阻 | $\geq 100 \text{ m}\Omega$ | 0 | 1 | 0 | / | OK |
| 可焊性 | 引出端有良好的镀层焊料 | 0 | 1 | 0 | / | OK |
| 引出端抗拉力、折弯强度 | 外观无异常、无可见损伤、电气特性稳定 | 0 | 1 | 0 | / | OK |
| 耐焊接热 | 外观无可见损伤, 容值变化率 $\leq 5\%$ | 0 | 1 | 0 | / | OK |
| 压力释放 | 防爆阀打开、无爆炸、无燃烧 | 0 | 1 | 0 | / | OK |
| 振动 | 外观无可见损伤、无漏液, 容值变化率 $\leq 5\%$ | 0 | 1 | 0 | / | OK |

检验员：黄烈群



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [HYNCDZ](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#) [227RZS050M](#)
[476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#)
[VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-](#)
[0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#) [NEV1000M6.3DE](#) [NEV100M16CB](#)
[NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#)