

U8 Flash Memory Controller

U8

*hyperston*®

# U8 Flash Memory Controller

The Hyperstone U8 family of flash memory controllers together with provided application and Flash specific firmware offers an easy-to-use turnkey platform for industrial, high endurance robust Flash Memory cards or modules compatible to host systems with USB 2.0 interface.

- Designed to satisfy industrial requirements
- hyReliability™ Flash Management including superior wear leveling, read disturb management, and power fail management ensuring highest reliability and endurance
- hyMap® Flash Translation Layer and mapping offering second to none random write performance, minimal write amplification, and consequently highest endurance for random access heavy usage profiles (e.g. JEDEC Enterprise)
- Continuously updated Flash Memory chip support and long term availability
- Flexible 96-Bit/1K BCH ECC engine supporting all Flash Memory requirements
- Optimized 32-Bit RISC core, instruction set for Flash Memory handling
- High performance on-the-fly AES 128 and 256 encryption engine
- Custom features can be implemented with simple firmware upgrades
- Turnkey solution including firmware, manufacturing kit, test and development hardware, as well as reference schematics

## Targeted Applications

- Industrial USB Flash Drive
- eUSB, embedded USB module
- Ultra durable Flash Drive
- Security Flash Drive
- Multi-Chip-Package (MCP)
- Disk-on-Board


## Order Information

- U8-RBQ03 (QFN 76, 9 x 9mm, 4 CEs, RoHS, -40 to +85 °C)
- U8-RB1Q03 (QFN 76, 9 x 9mm, 4 CEs, RoHS, -40 to +85 °C)

## Compliance & Performance

- Fully compliant with USB 2.0 specifications
- USB mass storage device class (MSC)
- High-Speed, Full-Speed,
- Secure Erase support
- S.M.A.R.T feature support
- Host transfer rate of up to 480 MBit/s
- Sequential read and write up to 35 MB/s

## U8 Block Diagram

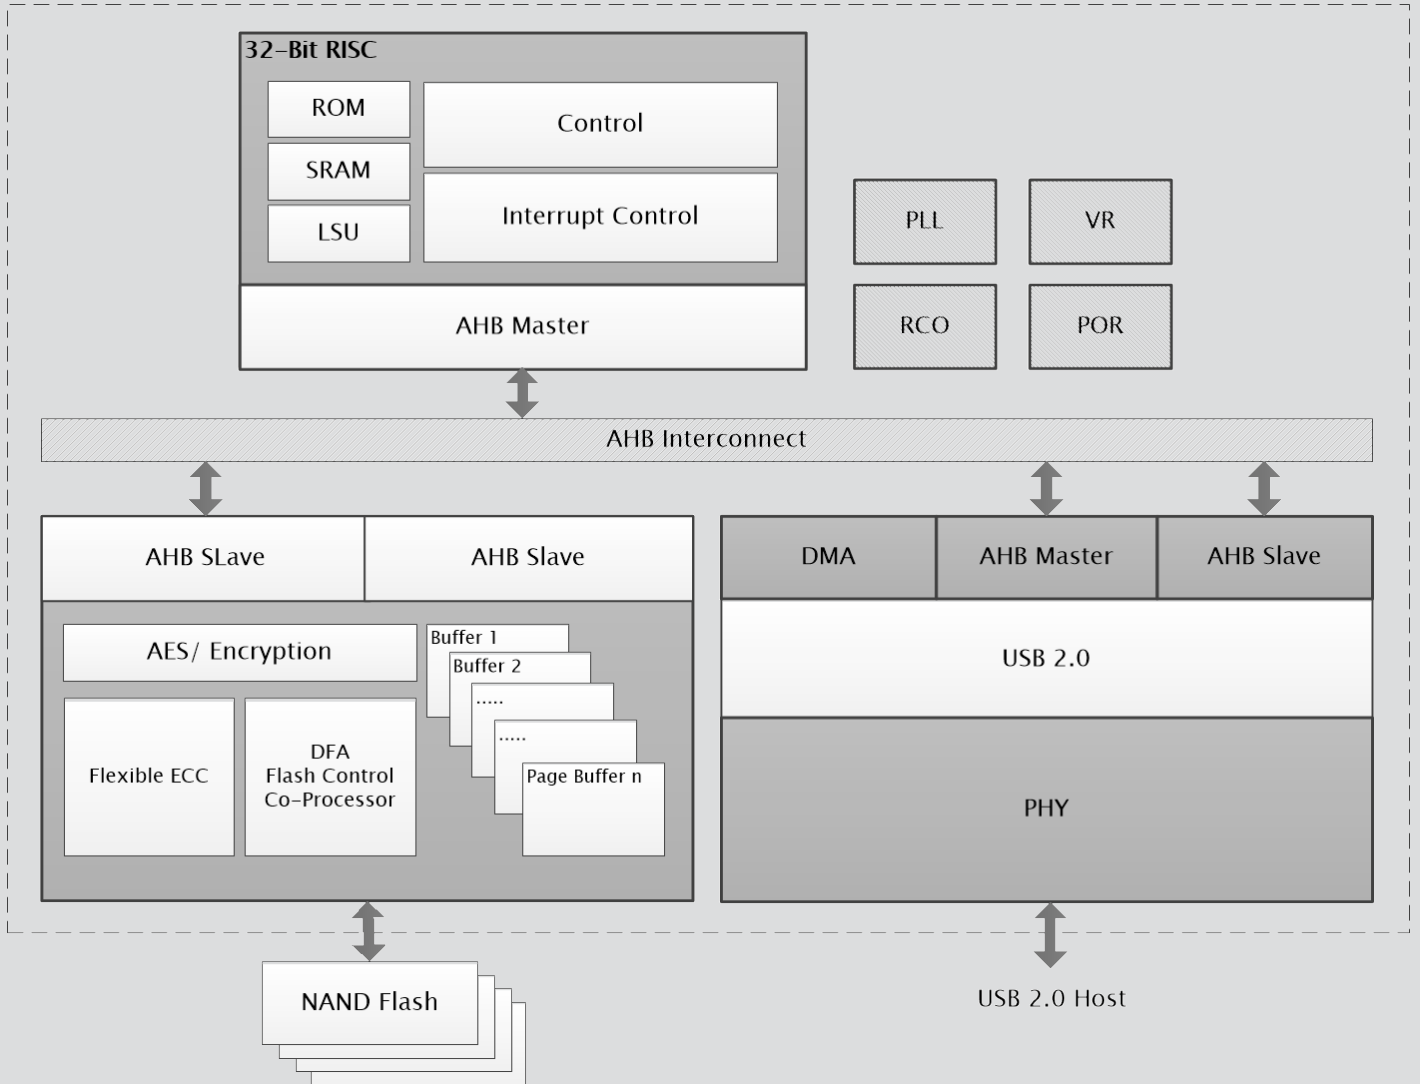

### Controller & CPU

- High performance 32-Bit Hyperstone RISC microprocessor
- Large internal RAM provides firmware flexibility
- Unique ID for security applications
- AES encryption engine 128 and 256-Bit
- High performance on-the-fly encryption/decryption
- Flexible clock frequency generation through internal
- PLL combined with clock multi divider.
- Automatic power-down mode during wait periods for host data or flash memory operation completion, automatic sleep mode during host inactivity periods
- Supply voltage  $3.3V \pm 5\%$
- Application Programming Interface (API) and Software Development Kit (SDK)

### Host Interface & Compliance


- Fully compliant with USB 2.0 specifications
- USB mass storage device class (MSC)
- USB human interface device class (HID) support is possible
- 4 configurable endpoints
- Hi-speed, Full speed, Low speed possible
- Bulk, isochronous, and interrupt transfer modes
- S.M.A.R.T., Sanitize, and Secure Erase support using ATA pass through command
- Configurable Early-Acknowledge to avoid any data loss
- during power fail.

### Flash Memory Interface

- Direct Flash Memory Access (DFA) co-processor including page buffers and interleaving capability
- Synchronous DDR interface compliant with Toggle DDR and ONFI 2.3, compatible with all DDR Flash Memory devices
- Asynchronous SDR interface, ONFI 1.0 compliant, compatible with all legacy interface Flashes
- Data transfer rate to flash up to 200 MB/s
- Flexible 96-Bit/1K BCH ECC engine
- CRC for additional reliability
- Direct connection of up to 4 Flash Memory chip enables (CE)
- Flash Memory power down logic and write protect control
- Supporting all Flash technologies and all page sizes up to 16 KB
- On-chip voltage regulator for 1.8 V Flash Memory I/O power

### Flash Memory Management

- hyReliability™ Flash Memory Management optimizing reliability, power fail safety, endurance, data retention and performance
- hyMap® Flash Translation Layer and mapping offering second to none random write performance, minimal write amplification, and consequently highest endurance for random access heavy usage profiles (e.g. JEDEC Enterprise)
- Optimized for fast boot-up times
- Bad Block Management
- Static and Global Wear leveling to maximize write endurance
- Inherent on-the-fly garbage collection
- Read Disturb Management, Dynamic Data Refresh to maximize data retention, and data refresh subject to read disturbance
- Management of sudden power-fails
- Interleaving, cache, and multi-plane programming
- Firmware is stored redundantly for recovery and refresh
- In-Field Firmware update without user data loss
- Customized firmware, optimizations and feature implementations possible upon request.

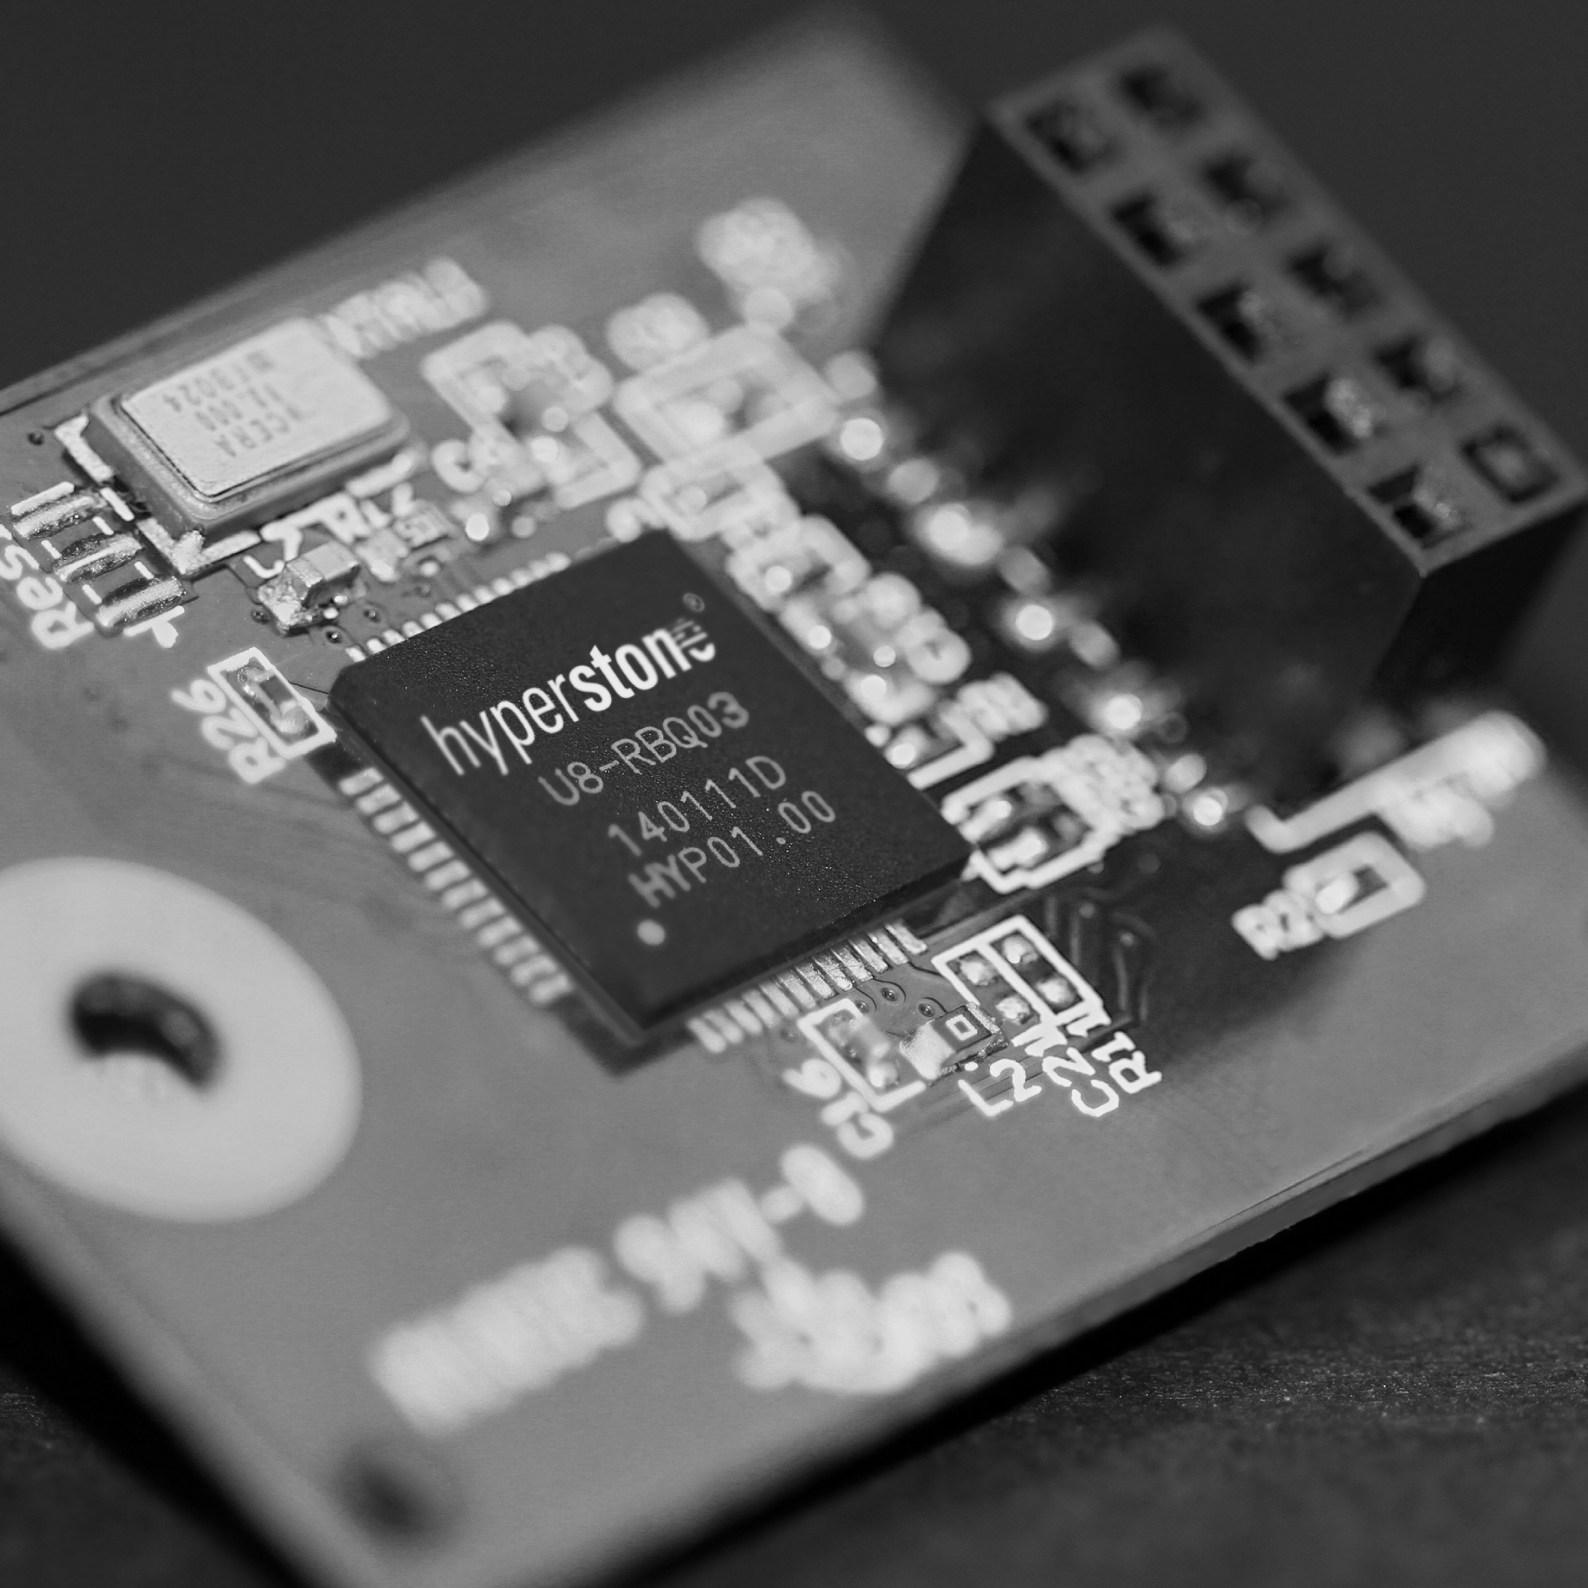

hyperstone®  
U8-RBQ03  
140111D  
HYP01.00

TRIP

R26

R27

941-0

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50



Hyperstone GmbH  
Line-Eid-Strasse 3  
78467 Konstanz  
Germany  
Phone: +49 7531 98030  
Email: eu.sales@hyperstone.com

Hyperstone Inc. - USA  
486 N Patterson Ave Suite 301  
Winston-Salem, NC 27101  
USA  
Phone: +1 336 744 0724  
Email: us.sales@hyperstone.com

Hyperstone Asia Pacific - Taiwan  
3F., No. 501, Sec.2, Tiding Blvd.  
Neihu District, Taipei City 114  
Taiwan, R.O.C.  
Phone: +886 2 8751 0203  
Email: ap.sales@hyperstone.com

[www.hyperstone.com](http://www.hyperstone.com)

Content is subject to change without prior notice. U8, hyReliability and hyMap are trademarks of Hyperstone GmbH. Other brand, product, or company names are property of the respective holder. Warranties, implied or expressed as well as liabilities for any damage resulting from using provided information in this document are excluded until part of a separate written contract.

HS-Mkt-LH-03-03-20

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Memory Controllers](#) category:*

*Click to view products by [Hyperstone](#) manufacturer:*

Other Similar products are found below :

[PM8607B1-F3EI](#) [A1-LBT06](#) [A1-ILBT06](#) [X1-RAB06-Y](#) [DS1314S-2+T&R](#) [BQ2201SN-NTR](#) [BQ2205LYPWR](#) [BQ2204APN](#) [BQ2204ASN](#)