

Features

- Supports Intel® Celeron® 1020E or 3rd Generation Intel® Core™ i processors
- 2x DDR3 SO-DIMM, Max. 16GB
- Onboard dual Gigabit LAN
- Optional 2MB battery backup NVRAM (SRAM)
- 2x expansion slots
- Dual DVI-I display outputs




Specifications

System Mainboard	Customized board
CPU Type	Intel® Celeron® 1020E / 3rd Generation Processors (2.2Ghz with 2MB cache)
System Speed	Up to 3.3Ghz
Memory	4GB DDR3 SO-DIMM (Max. up to 16GB)
Construction	Steel
Chassis Color	Sliver
Front Panel External I/O	2x RJ45 (Gigabit Ethernet) 2x RS-232 (D-sub) 2x DVI-I (supports Analog + Digital) 4x USB 2.0 4x USB 3.0 1x Line Out 1x DC input (3-pin phoenix connector with locking) 1x Power On/Off switch
Expansion slots	ABP-IP701: 1x PCI-E(x16) + 1x PCI-E(x4) ABP-IP702: 1x PCI + 1x PCI-E(x16) ABP-IP703: 2x PCI
Storage	2.5" SATA HDD or SSD
Mounting	Desktop or wall mount
Dimensions	297.4mm(W) x 266.2mm(D) x 78.5mm(H) 11.71"(W) x 10.48"(D) x 3.09"(H)
Operating Temperature	0°C~55°C (32°F~131°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10%~90% (non-condensing)
Vibration	Operating: 10~58Hz: 0,075 mm, 58~500 Hz: 9.8 m/s ² Non-Operating: 5~9Hz: 3.5 mm, 9~500 Hz: 9.8 m/s ²
Certification	CE/FCC Class B, LVDS

Ordering Information

AMS200	Box PC Controller with Intel® Celeron® 1020E 2.2Ghz CPU with 4GB DDR3 SO-DIMM, 2.5" 500GB SATA HDD and 1x PCI + 1x PCI-E(x16) expansion slots
--------	---

Dimensions and Drawing

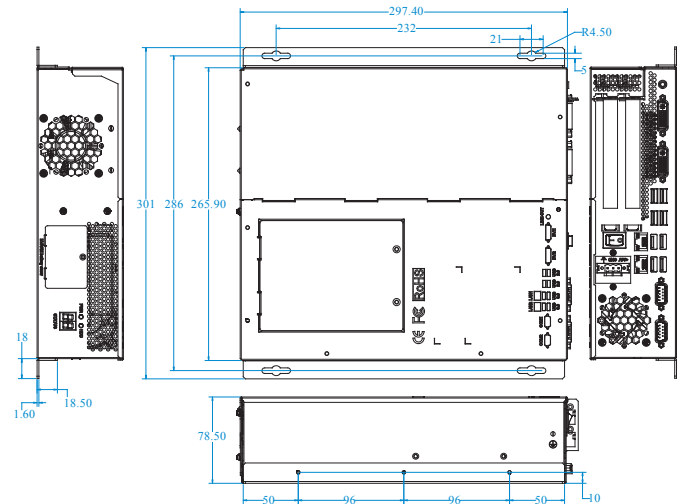

Why AMS200?


Electrical

- Supports 3rd Generation Intel® Core™ i7/i5/i3/ Celeron® Processors
- Up to 16GB DDR3 memory
- 2x Gigabit LAN, 2x RS-232, 2x DVI-I, 4x USB 2.0, 4x USB 3.0, 1x Mini PCI-E, 2x SATA III
- Direct 24V DC input voltage (+/- 15%)
- 2MB NVRAM backup

Mechanical & Environmental


- Motherboard MTBF of >200,000 hours (Based on Telcordia Issue 2 calculation model)
- Vibrations -
Operating: 10~58Hz: 0,075 mm, 58~500 Hz: 9.8 m/s²
Non-Operating: 5~9Hz: 3.5 mm, 9~500 Hz: 9.8 m/s²
- Shock
In accordance with IEC 60068-2-27
Operating: 50m/s², 30ms
Non-Operating: 250 m/s², 6ms
- Operating Temperature: 0°C ~ 55°C
- Certification: CE/FCC Class B

2.5" Removable HDD/SSD Housing with Shock Absorber

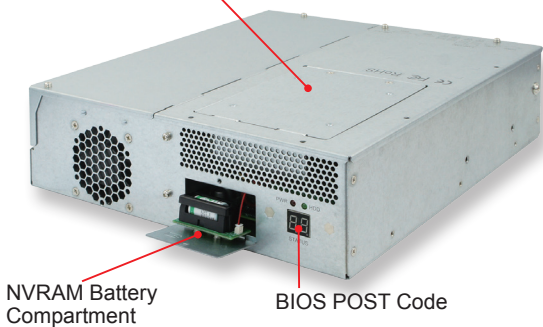

Battery for NVRAM

Mini PCI-E Expansion (USB + mSATA)

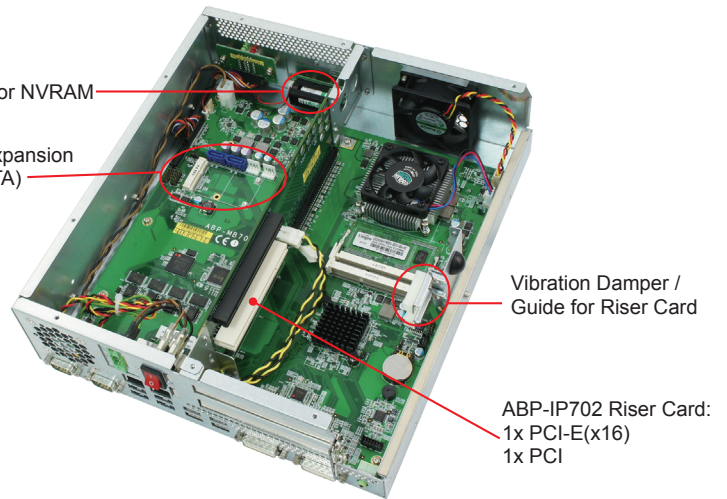

Applications for AMS200



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [Ibase](#) manufacturer:

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#) [AIMB-](#)
[T1215DA-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#) [APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-](#)
[S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-10A1E](#) [ITA-1711-10A1E](#) [MIC-720AI-00A1](#) [UNO-247-J1N1AE](#) [UTX-](#)
[3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#) [eBOX626-311-FL](#) [EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-](#)
[92-I7](#) [SI-606](#) [SI-60E](#) [TANK-760-HM86i-i5/4G-R10](#) [BKCM8i7CB8N](#)